



STRIP REEL

Superficie




Strip Reel es una línea de circuitos impresos flexibles adecuados para el alumbrado decorativo y para la integración con los perfiles Meccano. Suministrados en rollos de 5 m seccionables, están disponibles a 12 o 24 V, en tres densidades ("G" 72 LED/m, "C" 108 LED/m, "E" 156 LED/m) y con una temperatura de color natural (4000 K), caliente (3000 K) o Emotion Dual Color que permite la variación de 3000 K a 4000 K. Completa la gama la versión IP44 con funda de silicona.

H [cm]	72 lm/W 4000K	108 lm/W 4000K	156 lm/W 4000K
30	950 lx	1350 lx	1950 lx
50	500 lx	760 lx	1100 lx
100	150 lx	250 lx	350 lx

1 m
982 lm
84 lm/W
CRI>80



EDC

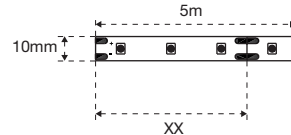


LED STRIP 12 V EDC 120 + 120 LED/m (Max 2,8 m)

12808490001AGD 12 V DC 13,0 W/m xx = 25 mm 3000-4000K



EMOTION DUAL COLOR
The colour temperature varies from 'warm' to 'natural' white (3000-4000K).

EMOTION JUMPER



12605010000
12 V DC
50 mm

CONTROL SYSTEMS




SMART SYSTEM
Easy wireless controller.
→ 180


IR DC/DC
Very low voltage controller.
→ 188

RADIO SWITCH
Radio controller.
→ 188


POWER SUPPLIES



12507730002
Max 15 W
1.25 A



12505460004
Max 45 W
3.75 A



12603960000
12 V DC
3 m

LED STRIP 12 V "G" 72 LED/m (Max 4,6 m)

12807400000GW 12 V DC 7,8 W/m xx = 42 mm 3000K

12807400000GN 4000K

12807400000GC 5000K

LED STRIP 12 V "C" 108 LED/m (Max 3,1 m)

12807410000CW 12 V DC 11,7 W/m xx = 27,8 mm 3000K

12807410000CN 4000K

12807410000CC 5000K

LED STRIP 12 V "E" 156 LED/m (Max 2,1 m)

12807420000EW 12 V DC 16,9 W/m xx = 19,2 mm 3000K

12807420000EN 4000K

12807420000EC 5000K

CONTROL SYSTEMS




SMART SYSTEM
Easy wireless controller.
→ 180


IR DC/DC
Very low voltage controller.
→ 188

RADIO SWITCH
Radio controller.
→ 188


POWER SUPPLIES



12507730002
Max 15 W
1.25 A






12505460004
Max 45 W
3.75 A



12603960000
12 V DC
3 m



EDC

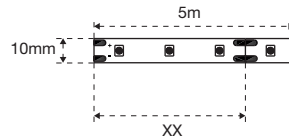


LED STRIP 24 V EDC 120 + 120 LED/m (Max 2,8 m)

12808860001AHD 24 V DC 13,0 W/m xx = 25 mm 3000-4000K



EMOTION DUAL COLOR
The colour temperature varies from 'warm' to 'natural' white (3000-4000K)

EMOTION JUMPER



12605020000
24 V DC
50 mm

CONTROL SYSTEMS



SMART SYSTEM
Easy wireless controller.
→ 180




IR DC/DC
Very low voltage controller.
→ 188




RADIO SWITCH
Radio controller.
→ 188

POWER SUPPLIES




12507760001
Max 15 W
0.625 A



12505500002
Max 45 W
1.875 A

CONNECTION CORD



12603920000
24 V DC
3 m

LED STRIP 24 V "G" 72 LED/m (Max 4,6 m)

12808190000NW 24 V DC 7,8 W/m xx = 42 mm 3000K

12808190000NN 4000K

12808190000NC 5000K

LED STRIP 24 V "C" 108 LED/m (Max 3,1 m)

12808180000MW 24 V DC 11,7 W/m xx = 27,8 mm 3000K

12808180000MN 4000K

12808180000MC 5000K

LED STRIP 24 V "E" 156 LED/m (Max 2,1 m)

12807430000IW 24 V DC 16,9 W/m xx = 19,2 mm 3000K

12807430000IN 4000K

12807430000IC 5000K

CONTROL SYSTEMS



SMART SYSTEM
Easy wireless controller.
→ 180




IR DC/DC
Very low voltage controller.
→ 188




RADIO SWITCH
Radio controller.
→ 188

POWER SUPPLIES




12507760001
Max 15 W
0.625 A



12505500002
Max 45 W
1.875 A



CONNECTION CORD



12603920000
24 V DC
3 m



Sheathed

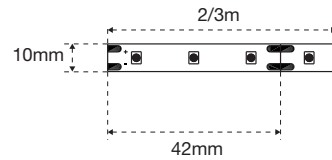

LED STRIP 12 V "G" 72 LED/m (Max 4,6 m)

12810040000GW	12 V DC	7,8 W/m	xx = 42 mm	3000K
12810040000GN				4000K

ACCESSORIES

12417810001
25 clips and
screw + 2
endcaps

CONTROL SYSTEMS



SMART SYSTEM
Easy wireless
controller.
→ 180




IR DC/DC
Very low voltage
controller.
→ 188




RADIO SWITCH
Radio
controller.
→ 188


POWER SUPPLIES



12507730002
Max 15 W
1.25 A



12505460004
Max 45 W
3.75 A



12603960000
12 V DC
3 m


CONNECTION CORD





MINI OCTOPUS

Superficie / empotrado

Mini Octopus es un perfil en silicona flexible que permite resaltar las formas y los contornos de los muebles y crear líneas de luz difusa y homogénea de sólo 4 mm de ancho. Los rollos se pueden cortar e instalar a presión sobre el material fresado, los accesorios clip (no incluidos) permiten la aplicación en apoyo. La versión IP65 se puede instalar en lugares con alta humedad. La Fuente LED está disponible con una temperatura de color natural (4000 K) o caliente (3000 K).

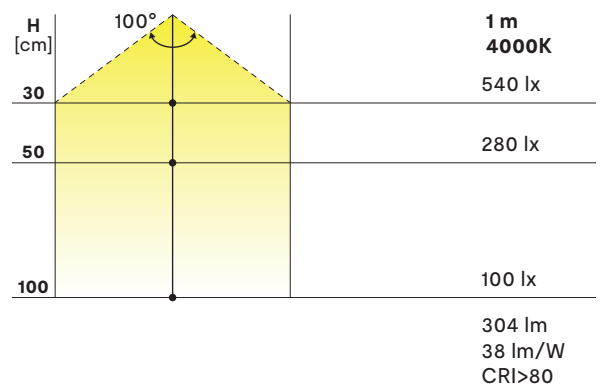

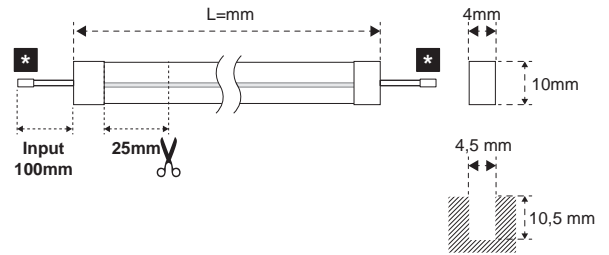

MINI OCTOPUS EDC




29000010101ZD	12 V DC	10 W	1 m	1 input	3000-4000K
29000020101ZD	12 V DC	30 W	3 m	2 input	3000-4000K
29000030101ZD	12 V DC	60 W	6 m	2 input	3000-4000K



EMOTION DUAL COLOR
The colour temperature varies from 'warm' to 'natural' white (3000-4000K).
Emotion jumper included.




ACCESSORIES



13200310000
15 x clips
for surface
mounting



13201950000
3 x clips
for surface
mounting



INCLUDED
3 m connection
cord
1 x input

CONTROL SYSTEMS



SMART SYSTEM
Easy wireless
controller.
→ 180




IR DC/DC
Very low voltage
controller.
→ 188




RADIO SWITCH
Radio
controller.
→ 188

POWER SUPPLIES



12507730002
Max 15 W
1.25 A




12505460004
Max 45 W
3.75 A

MINI OCTOPUS

29000010101ZN	12 V DC	8 W	1 m	1 input	4000K
29000010101ZW					3000K
29000020101ZN	12 V DC	24 W	3 m	2 input	4000K
29000020101ZW					3000K
29000030101ZN	12 V DC	48 W	6 m	2 input	4000K
29000030101ZW					3000K


ACCESSORIES



13200310000
15 x clips
for surface
mounting



13201950000
3 x clips
for surface
mounting



INCLUDED
3 m connection
cord
1 x input

CONTROL SYSTEMS



SMART SYSTEM
Easy wireless
controller.
→ 180




IR DC/DC
Very low voltage
controller.
→ 188




RADIO SWITCH
Radio
controller.
→ 188



POWER SUPPLIES



12507730002
Max 15 W
1.25 A



12505460004
Max 45 W
3.75 A

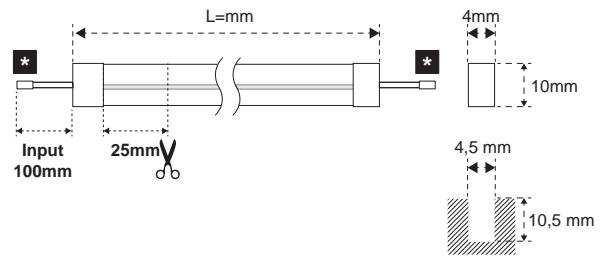

MINI OCTOPUS IP65

29000080101ZN	12 V DC	8 W	6 m	1 input	4000K
29000080101ZW					3000K

ACCESSORIES




13200310000
15 x clips
for surface
mounting



13201950000
3 x clips
for surface
mounting



INCLUDED
3 m connection
cord
1 x input



INCLUDED
Glue and
caps for IP
connection

CONTROL SYSTEMS



SMART SYSTEM
Easy wireless
controller.
→ 180




IR DC/DC
Very low voltage
controller.
→ 188




RADIO SWITCH
Radio
controller.
→ 188

POWER SUPPLIES



12507730002
Max 15 W
1.25 A



12505460004
Max 45 W
3.75 A

