Experiencing Light

NEWS

2019

Global Network

L&S designs and produces technical lighting solutions for furniture and interior design in the residential, distributors, commercial and industrial sectors. It's a trusted partner that offers targeted advices and a punctual service to customers. Competence, experience, concreteness and consistency of the solutions, together with a constant attention for innovation and aesthetic research, make L&S a smart company, dedicated to enhancing the customers' products through light.

L&S progetta e produce illuminazione tecnica per arredamento e interior design per il settore residenziale, distributori, commerciale e industriale. Si propone ai propri clienti come partner di fiducia, mettendo a disposizione capacità progettuali e un servizio puntale. Competenza, esperienza, concretezza e coerenza delle soluzioni, insieme ad una costante attenzione verso l'innovazione e la ricerca estetica, rendono L&S un'azienda smart, vocata ad esaltare i prodotti, gli ambienti e gli oggetti tramite la luce.

ITALY

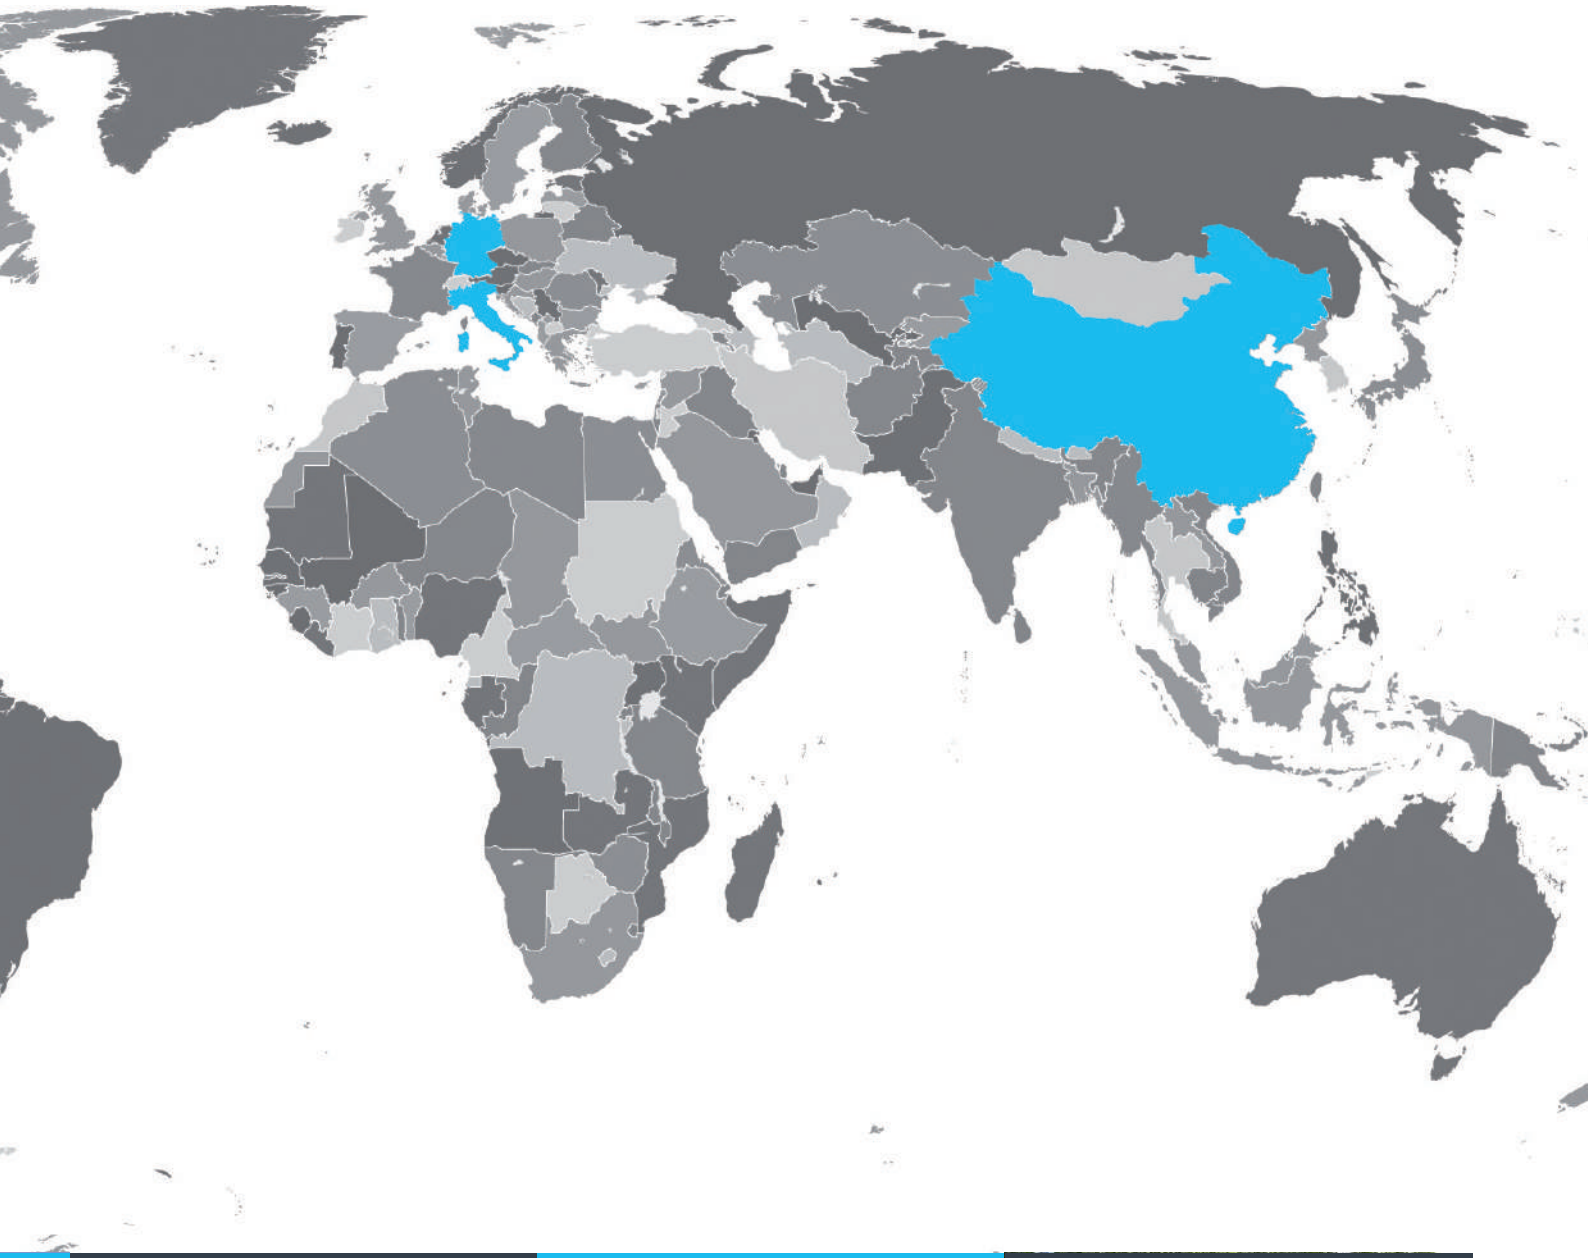

GERMANY

CHINA

USA

Emotion Dual Color: changing color has never been so easy

CAMBIARE COLORE NON È MAI STATO COSÌ FACILE

The “Emotion®” technology allows to change the color temperature gradually from warm light to cold light.

La tecnologia “Emotion®” consente di variare la temperatura colore progressivamente da luce calda a luce fredda.

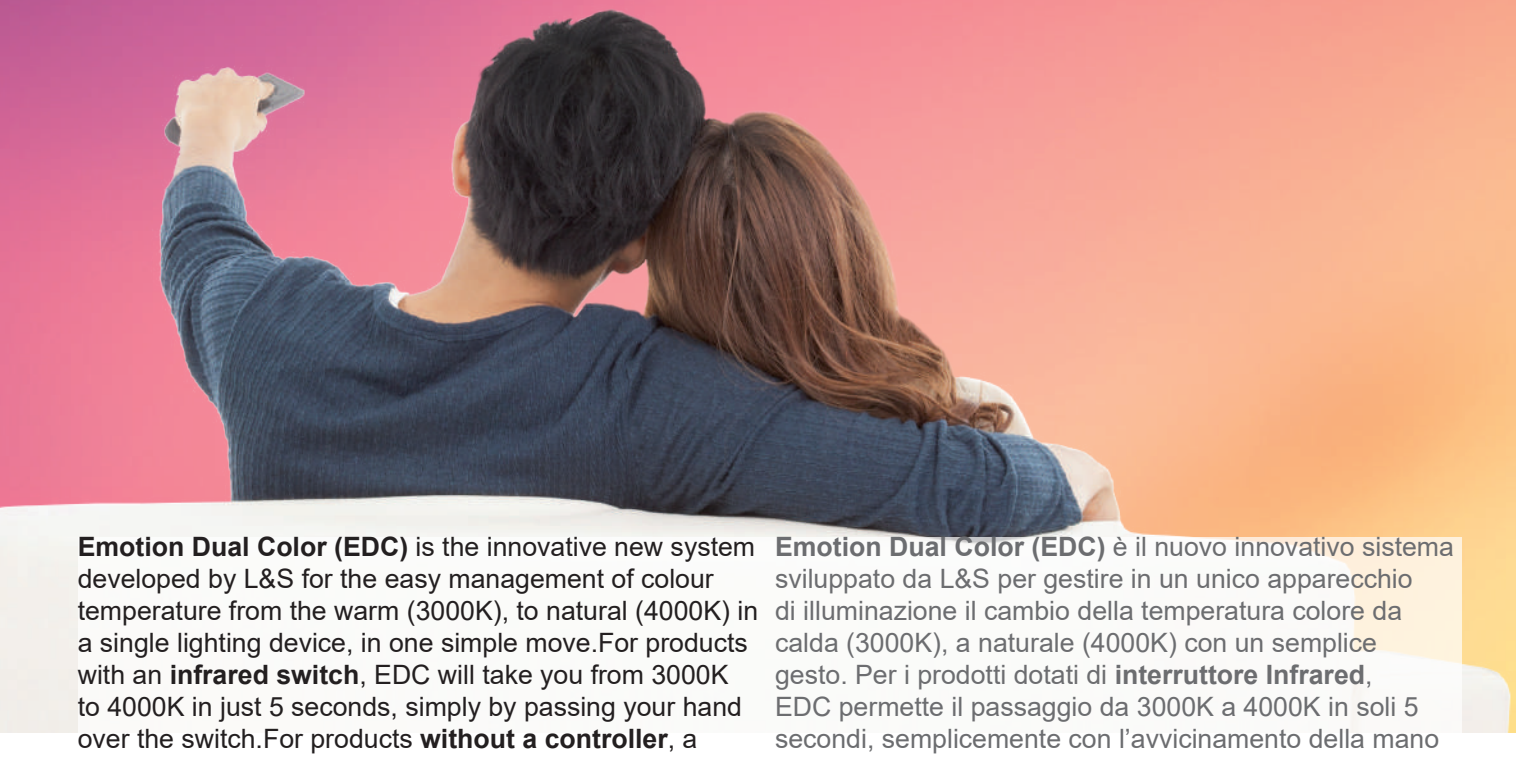

Emotion Dual Color (EDC) is the innovative new system developed by L&S for the easy management of colour temperature from the warm (3000K), to natural (4000K) in a single lighting device, in one simple move.For products with an **infrared switch**, EDC will take you from 3000K to 4000K in just 5 seconds, simply by passing your hand over the switch.For products **without a controller**, a “Emotion Jumper” is supplied, a converter cable that can adjust the colour temperature without the need for two separate lighting devices. Thanks to the new **EDC** system it is now possible to meet a range of market demands, from the correct illumination of a kitchen worktop to lighting that accentuates a product in a retail space, effectively providing two products in a single device.

Emotion Dual Color (EDC) è il nuovo innovativo sistema sviluppato da L&S per gestire in un unico apparecchio di illuminazione il cambio della temperatura colore da calda (3000K), a naturale (4000K) con un semplice gesto. Per i prodotti dotati di **interruttore Infrared**, EDC permette il passaggio da 3000K a 4000K in soli 5 secondi, semplicemente con l’avvicinamento della mano in prossimità dell’interruttore. Per quanto riguarda i , in dotazione viene fornito un “Emotion Jumper”, cavetto convertitore che permette di virare la temperatura colore senza dover disporre di due diversi apparecchi di illuminazione. Grazie al nuovo sistema EDC è possibile rispondere alle diverse esigenze di mercato, sia che si tratti di illuminare nel modo corretto un piano di lavoro di una cucina, sia per esaltare la percezione di un oggetto in uno spazio commerciale, disponendo di due prodotti in un unico dispositivo.

How to use Emotion Dual Color

Come usare Emotion Dual Color

1 Light fixture with IR switch
Lampada con interruttore IR

Turn the light on/off by waiving you hand close to the switch. Color changes once I keep the hand close to the switch for 5 seconds.





2 Light fixture without IR switch
Lampada senza interruttore IR

The color changes thanks to the 'Emotion Jumper' connector.



3 Light fixture with external controller
Lampada con controller esterno

Turn the light on/off and color changes with Emotion controller (see "SMART" catalogue).

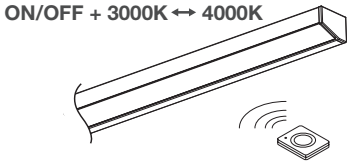

Emotion Dual Color is compatible with most products in the "Linear" and "Spot" lighting categories.
EDC is also suitable for use with the "Emotion" controller, the patented lighting system from L&S that gives a gradual shift between colour temperatures.

Emotion Dual Color è integrabile nella maggior parte dei prodotti della categoria "Linear" e "Spot".
EDC, inoltre, è compatibile con i controller "Emotion", il sistema di illuminazione brevettato da L&S che consente di variare la temperatura colore in modo graduale.

Index

Smart Controls System

10 Smart 4 EDC
Smart 4 MONO
Smart 4 RGB
11 Smart 1 EDC
Smart 1 MONO
Smart 1 RGB
12 Smart TOUCH
Smart SENSOR
Smart GHOST
13 Smart SWITCH
Smart GATEWAY
14 Smart 4 EDC Receiver
Smart 4 MONO Receiver
15 Smart 1 EDC Receiver
Smart 1 MONO Receiver
Smart 1 RGB Receiver

Linear

17 Solaris-UC PLUS
18 Ghibli
20 K Concept
22 Kubi
23 Iko
24 Kea
25 Kaleo
26 Kendo
27 Kendo.IN
28 Lugano IP44
29 Bali
30 Malindi2
31 Kiton
32 Paris
33 Oslo
34 Lumi
35 Mini Corner
36 Fly Light
37 Paper Shelf
38 Skuba
39 Star Light
40 Nubio
41 Perth
42 Miska
43 Elba
44 Capri
45 Free Led
46 Freedom PLUS

Spot

48 Legis
49 Area Light
50 Space Light
51 Base
52 Blues
53 Sunrise
54 Lucky -1
55 Lucky -2
56 Lucky -3
57 Lucky -4
58 Nube 35
59 Nube 58
60 Nube 68
61 Nube 230
62 Matrix
63 Matrix.IN
64 Shaping S
65 Shaping R
66 Shaping R2
67 Shaping C
68 Hawaii
69 Light Point
70 Iris
71 Lilium
72 Gem-A

Rechargeable & Battery

74 Smart
75 Smart MINI
76 Smart PLUS
77 Stilo

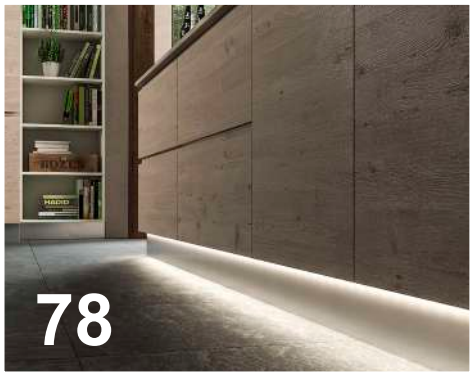

Strip Reel

79 Strip Reel 12Vdc
80 Strip Reel 24Vdc
81 Strip Reel sheathed

Controllers & Accessories

83 Radio Switch
84 IR DC/DC
85 Toki

Meccano & Meccano sliding

87 Meccano system
94 Meccano sliding

Solaris

99 Solaris panels

SMART SYSTEM
COMFORT AT YOUR FINGERTIPS

User scenarios: example
Scenari d’uso: esempio

N°1 ENVIRONMENT, **N°1** LIGHT ZONE WITH CHANGE OF COLOR TEMPERATURE

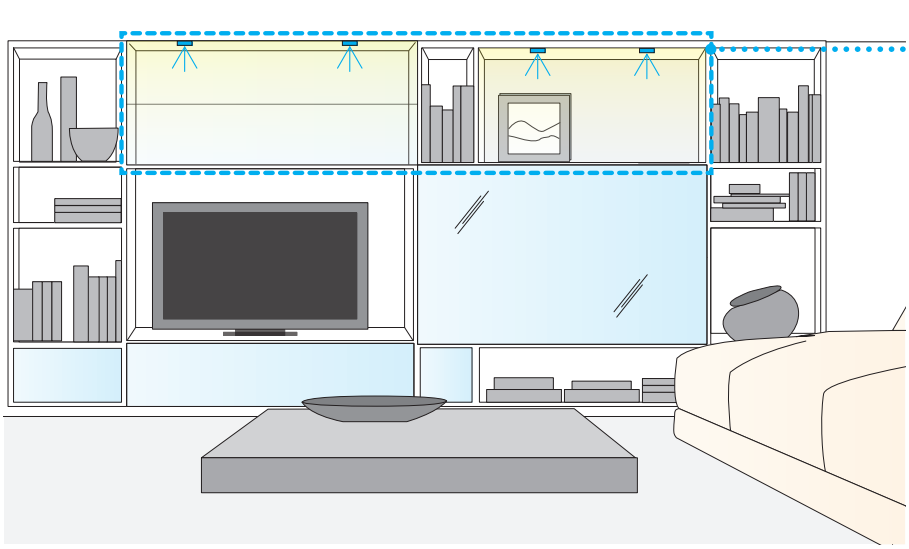

What is needed		Q.ty
	Controller Smart 1 EDC Management of 1 channel	1
1ch	Receiver Smart 1 Receiver Management of 1 channel	1

User scenarios: example
Scenari d’uso: esempi

N°2 ENVIRONMENT, **N°4** LIGHT ZONE WITH CHANGE OF COLOR TEMPERATURE

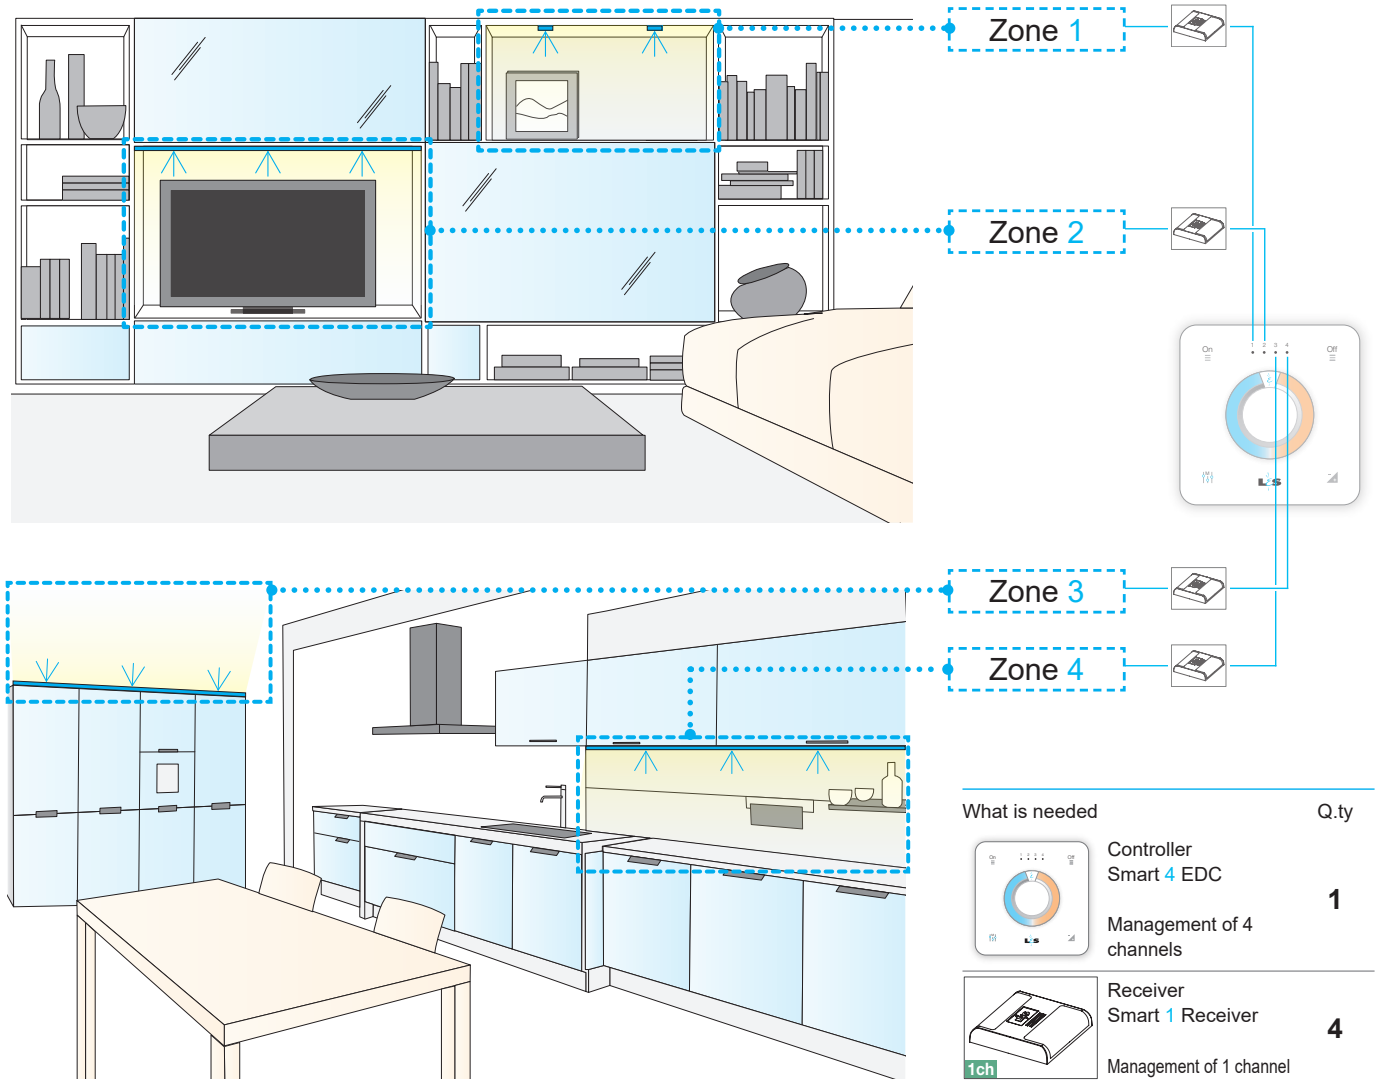

What is needed	Q.ty
Controller Smart 4 EDC Management of 4 channels	1
Receiver Smart 1 Receiver Management of 1 channel	4

N°1 ENVIRONMENT, **N°4** LIGHT ZONE WITH CHANGE OF COLOR TEMPERATURE

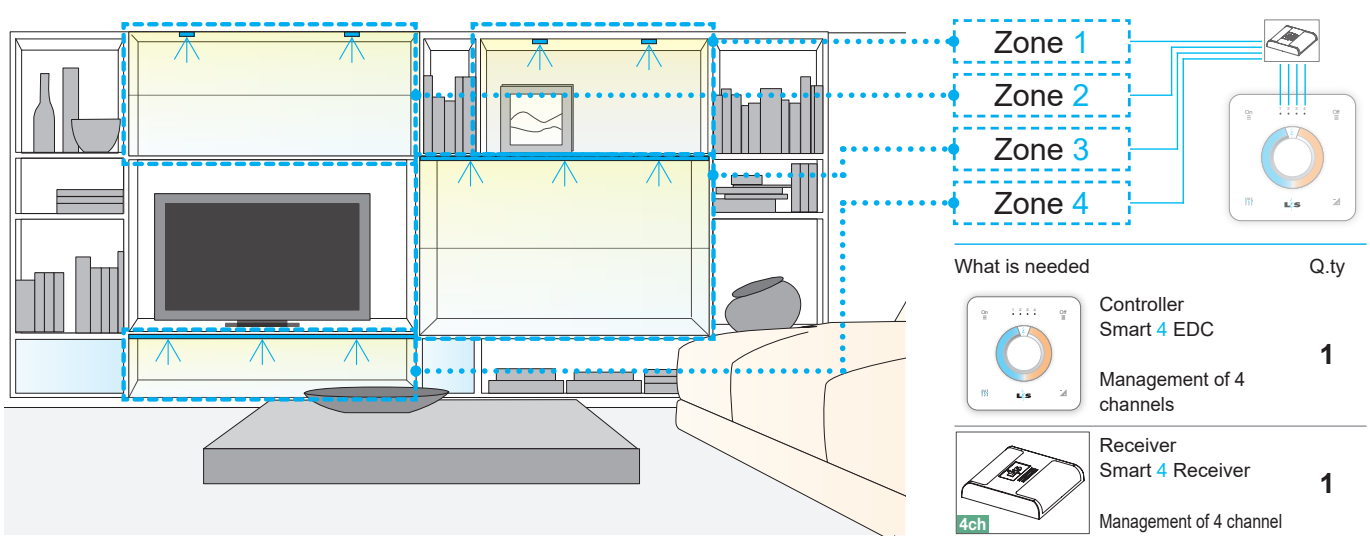

What is needed	Q.ty
Controller Smart 4 EDC Management of 4 channels	1
Receiver Smart 4 Receiver Management of 4 channel	1

CONTROLLER
4-Channel 4-Canali

SMART 4 EDC

Wireless controller with central push button, touch ring and touch commands (It recognizes short and long press). Possibility to control and memorize up to 4 independent channels. Linked to Smart 1 Receiver EDC or Smart 4 Receiver EDC, controls the lights in terms of Dimming and changing of color temperature EDC (Emotion Dual Color)

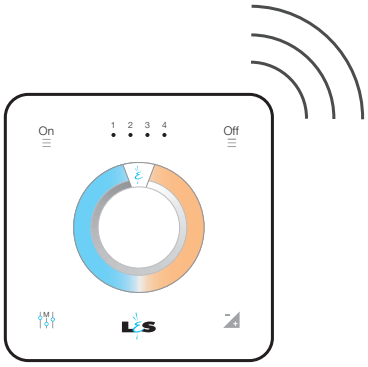

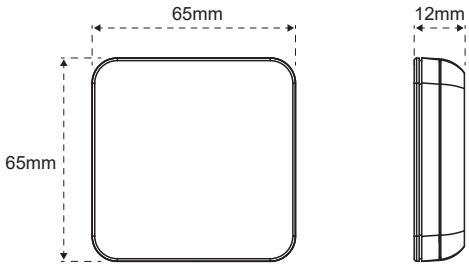

CODE **24200640100**

- Switch — ON/OFF function
- Dimming function
- EDC function: the colour temperature varies from 'warm' to 'natural'
- Range: 20m inside buildings
- BATTERY — Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 and SMART 4 RECEIVER EDC

SMART 4 MONO

Wireless controller with central push button, touch ring and touch commands (It recognizes short and long press). Possibility to control and memorize up to 4 independent channels. Linked to Smart 1 Receiver MONO or Smart 4 Receiver MONO, controls the lights in terms of Dimming

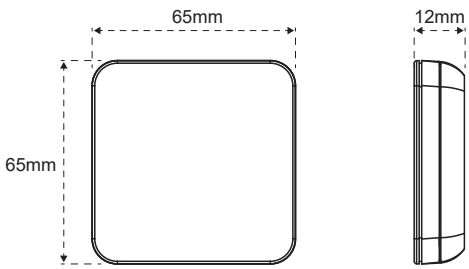

CODE **24200630100**

- Switch — ON/OFF function
- Dimming function
- Range: 20m inside buildings
- BATTERY — Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 and SMART 4 RECEIVER MONO

SMART 4 RGB

Wireless controller with central push button, touch ring and touch commands (It recognizes short and long press). Possibility to control and memorize up to 4 independent channels. Linked to Smart 1 Receiver RGB, controls the lights in terms of Dimming and changing of colors RGB-W

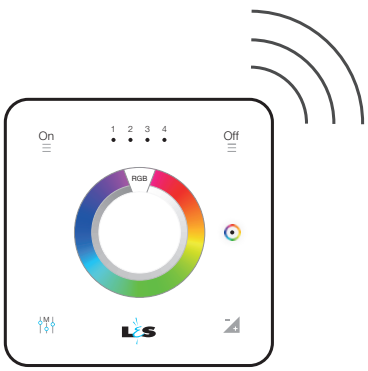

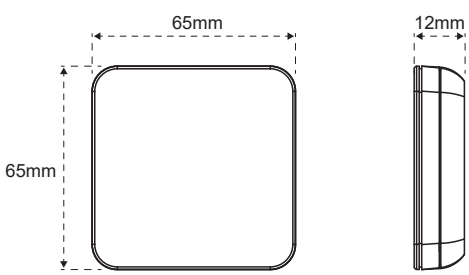

CODE **24200650100**

- Switch — ON/OFF function
- Dimming function
- RGB function: change the color of light
- Range: 20m inside buildings
- BATTERY — Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 RECEIVER RGB

CONTROLLER
1-Channel 1-Canale

SMART 1 EDC

Wireless controller with central push button and touch ring. Linked to Smart 1 Receiver EDC, controls the lights in terms of Dimming and changing of color temperature EDC (Emotion Dual Color)



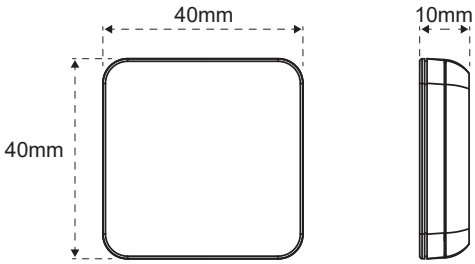

CODE **24200610100**

- ON/OFF function
- Dimming function
- EDC function: the colour temperature varies from 'warm' to 'natural'
- Range: 15m inside buildings
- Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 RECEIVER EDC

SMART 1 MONO

Wireless controller with central push button and touch ring. Linked to Smart 1 Receiver MONO, controls the lights in terms of Dimming

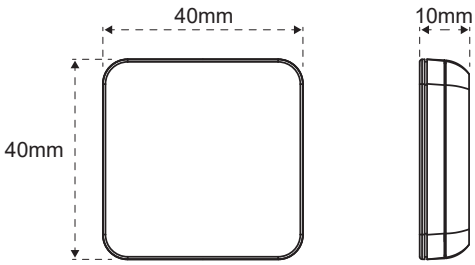

CODE **24200600100**

- ON/OFF function
- Dimming function
- Range: 15m inside buildings
- Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 RECEIVER MONO

SMART 1 RGB

Wireless controller with central push button and touch ring. Linked to Smart 1 Receiver RGB, controls the lights in terms of Dimming and changing of colors RGB-W

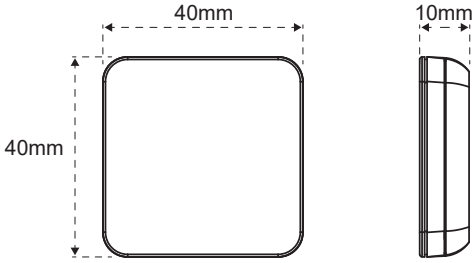

CODE **24200620100**

- ON/OFF function
- Dimming function
- RGB function: change the color of light
- Range: 15m inside buildings
- Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 RECEIVER RGB

CONTROLLER
1-Channel 1-Canale

SMART TOUCH

Wireless touch controller. Linked to Smart receivers (EDC / MONO), controls the lights in terms of Dimming and changing of color temperature EDC (Emotion Dual Color)

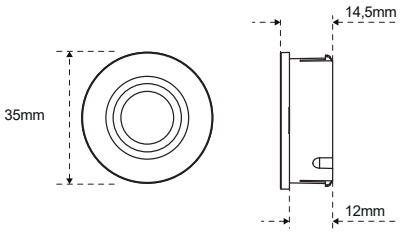



CODE **24200740100**

- ON/OFF function
- Dimming function
- EDC function: the colour temperature varies from 'warm' to 'natural'
- Range: 15m inside buildings
- Type of battery: CR2450
- Estimated battery time: 3years
- compatible with: SMART 1 and SMART 4 RECEIVER EDC / MONO

SMART SENSOR

PIR Sensor or wireless touch controller. When the sensor is activated, it's possible to set a brightness threshold to avoid that the light will turn ON if the environmental light is enough. The timer can also be set independently according to customer needs. Linked to Smart receivers (EDC / MONO), controls the lights in terms of Dimming and changing of color temperature EDC (Emotion Dual Color)

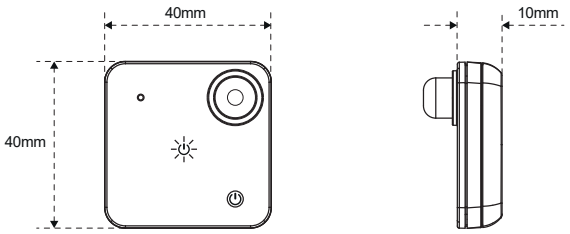

CODE **24200750101**

- ON/OFF function
- Dimming function
- Detection area: max 5m
- EDC function: the colour temperature varies from 'warm' to 'natural'
- Range: 15m inside buildings
- Type of battery: CR2450
- Estimated battery time: 2years
- compatible with: SMART 1 and SMART 4 RECEIVER EDC / MONO

SMART GHOST

Wireless sensor that detects movement. Suitable for all doors types in order to switch on or off the light connected to it. Linked to Smart receivers (EDC / MONO), controls the lights in terms of ON/OFF.
Versions: with magnet for immediate shutdown. Without magnet for shutdown with timer

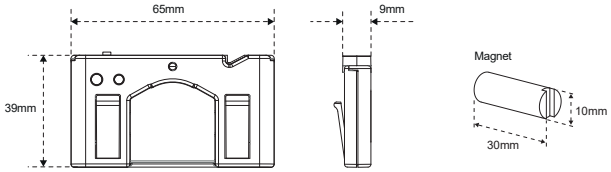

CODE **24200690100**

- IR switch ON/OFF
- Range: 15m inside buildings
- Type of battery: CR2450
- Estimated battery time: 4years
- compatible with: SMART 1 and SMART 4 RECEIVER EDC / MONO

CONTROLLER
1Channel 1-Canale

SMART SWITCH

Wall wireless remote controller. Turns standard switches in wireless controls. Linked to Smart receivers (EDC / MONO), controls the lights in terms of Dimming and changing of color temperature EDC (Emotion Dual Color). No wiring nedeed, it's integrated in the existing system used, ideal for retrofitting. The wireless technology allows to control new lighting areas







CODE **24200660100**

ON/OFF function

Dimming function

EDC function: the colour temperature varies from 'warm' to 'natural'

Range: 15m inside buildings

Type of battery: CR2450

Estimated battery time: 3years

compatible with: SMART 1 and SMART 4 RECEIVER EDC / MONO

CONTROLLER
1-4Channel 1-4Canali

SMART GATEWAY

GATEWAY, the evolution of the web where the electrical devices communicate with each other and your smartphone, tablet or PC becomes the control interface. Via a central Hub, control units and devices communicate with each other. The control interface with the App connects to the Hub via Wi-Fi with direct access point on the Hub. The Hub communicates with the Lighting devices via radio. Reliability and control and long transmissions distances.

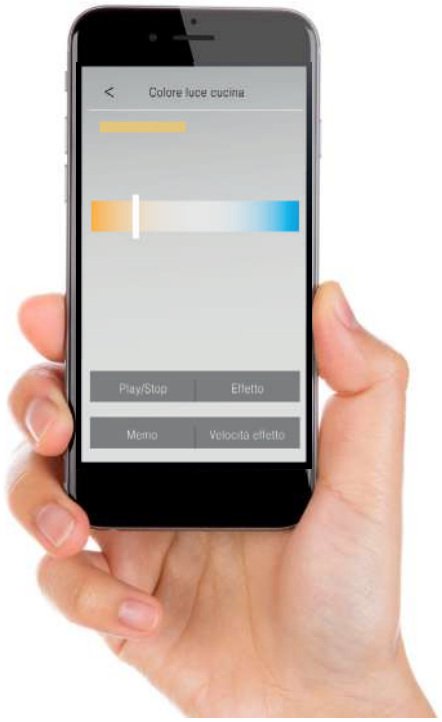

Central HUB

CODE **24200700100**

Dim: 71x67mm h64mm

ON/OFF function

Dimming function

EDC function: the colour temperature varies from 'warm' to 'natural'

RGB function: change the color of light

Connect the smartphone, tablet or PC via WiFi

Range: 15m inside buildings

Type of battery: CR2450

Estimated battery time: 3years

compatible with: SMART 1 and SMART 4 RECEIVER EDC / MONO / RGB

RECEIVER
4-Channel 4-Canali

SMART 4 EDC RECEIVER

Independent 4 channels receiver. “EDC” (Emotion Dual Color for changing color temperature) light control. Total 5A max, 3A each output

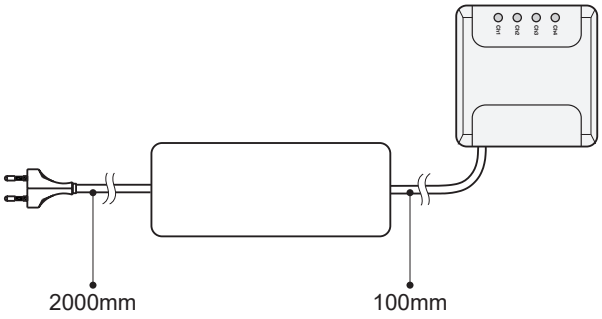

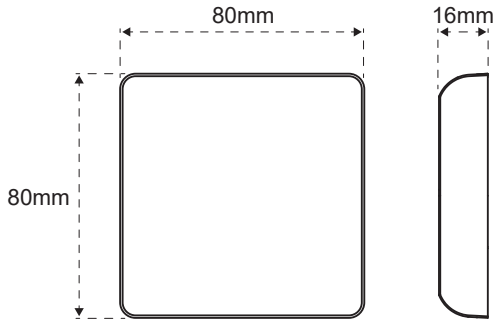

A Distributor



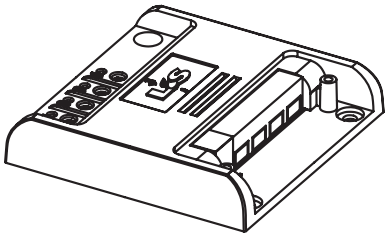

POWER SUPPLY INCLUDED

CODE	Ch.		V~	VDC	P(W)	I(A)
24200540100	4	n.a.	220-240	12	max. 60	5
24200590100	4	n.a.	220-240	24	max. 120	5

CODE	REF.		L mm	VDC	P(W)	I(A)
12603990300	A	10	500	12	max. 36	max. 3
12606000100	A	10	500	24	max. 72	max. 3

SMART 4 MONO RECEIVER

Independent 4 channels receiver. “Fixed White” light control. Total 5A max, 3A each output

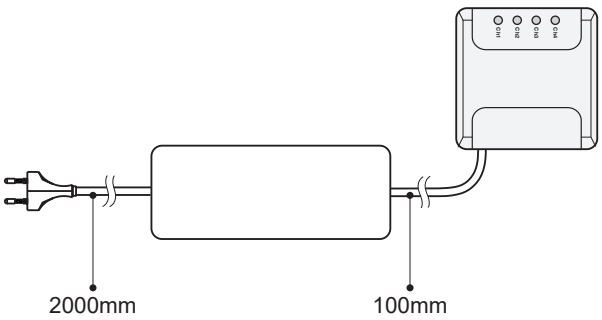

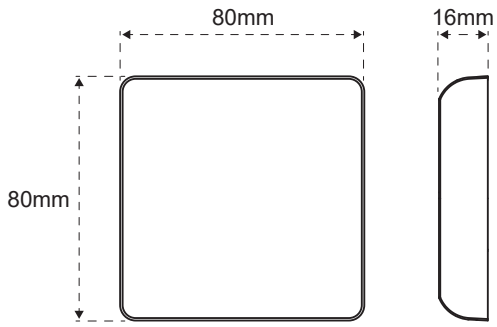

A Distributor



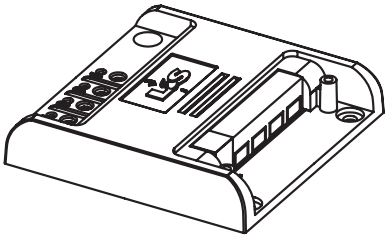

POWER SUPPLY INCLUDED

CODE	Ch.		V~	VDC	P(W)	I(A)
24200530100	4	n.a.	220-240	12	max. 60	5
24200580100	4	n.a.	220-240	24	max. 120	5

CODE	REF.		L mm	VDC	P(W)	I(A)
12603990300	A	10	500	12	max. 36	max. 3
12606000100	A	10	500	24	max. 72	max. 3

RECEIVER
1-Channel 1-Canale

SMART 1 EDC RECEIVER

1 channel receiver. “EDC” (Emotion Dual Color for changing color temperature) light control

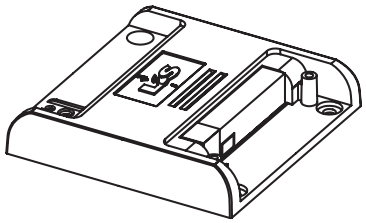

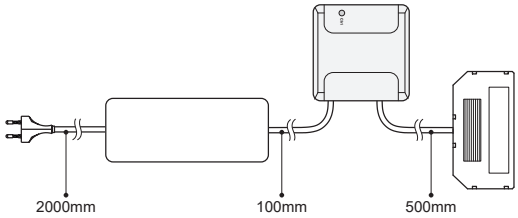



POWER SUPPLY INCLUDED

CODE	Ch.		V~	VDC	P(W)	I(A)
24200980100	1	10	220-240	12	max. 15	1,25
24200520100	1	10	220-240	12	max. 60	5
24200560100	1	10	220-240	24	max. 120	5

SMART 1 MONO RECEIVER

1 channel receiver. “Fixed White” light control

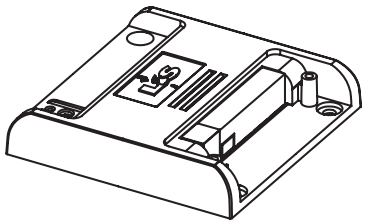

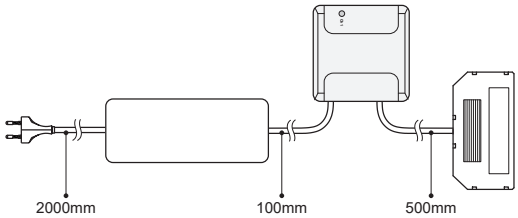



POWER SUPPLY INCLUDED

CODE	Ch.		V~	VDC	P(W)	I(A)
24200860100	1	10	220-240	12	max. 15	1,25
24200510100	1	10	220-240	12	max. 60	5
24200550100	1	10	220-240	24	max. 120	5

SMART 1 RGB RECEIVER

1 channel receiver. “RGB” light control

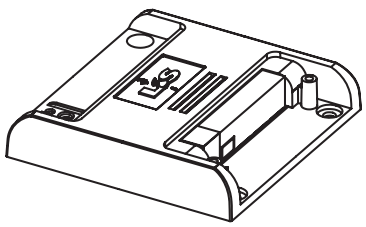

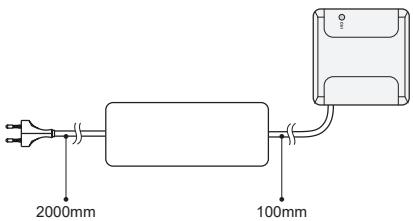



POWER SUPPLY INCLUDED

CODE	Ch.		V~	VDC	P(W)	I(A)
24200570100	1	n.a.	220-240	24	max. 120	5

LINEAR

SOLARIS-UC PLUS

Undercabinet LED light with no-dots effect; 12V with Emotion Dual Color 3000-4000K light temperature. Available with or without IRS infrared switch for on/off and EDC temperature changing. It's a compact lamp, easy to install by using screws; the continuous row can be created by suing the related connector (included). The length customization is not available. It's compatible with the Kessembhömer accessories.

Lampada LED sottopensile ad effetto diffuso omogeneo; 12V con luce Emotion Dual Color 3000-4000K. Disponibile con o senza sensore ad infrarosso IRS per accensione/spegnimento e cambio temperatura EDC. È una lampada compatta di facile installazione tramite viti; la fila continua è possibile usando il relativo connettore ponte (in dotazione). La personalizzazione in lunghezza non è prevista.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2,5m
- Class III insulation
- CE marking
- compatible with Kesseböhmer "LINERO 2000" accessories

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
22106531200ZD	7,2	450	3000-4000	n.a.
22106541200ZD	9,2	600	3000-4000	n.a.
22106551200ZD	12,3	900	3000-4000	n.a.
22106561200ZD	16,0	1200	3000-4000	n.a.

	W	L mm	K	
22106491200ZD	7,2	450	3000-4000	Yes
22106501200ZD	9,2	600	3000-4000	Yes
22106511200ZD	12,3	900	3000-4000	Yes
22106521200ZD	16,0	1200	3000-4000	Yes

TECHNICAL DRAWING

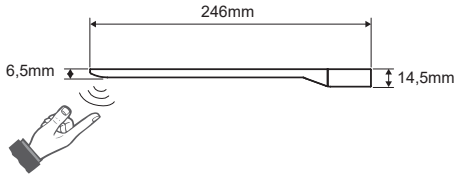

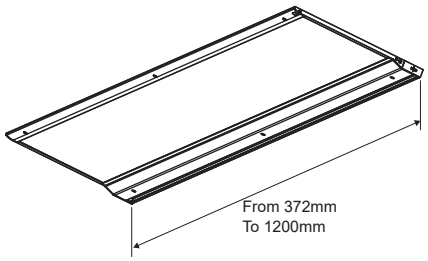

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
900mm EDC	800	65	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

GHIBLI

Undercabinet LED light with no-dots effect; 12V with Emotion Dual Color 3000-4000K. Available with or without IRS infrared switch for on/off and EDC temperature changing. It's a compact lamp for easy installation by using screws; the continuous row and the length personalization are not available. It has a dedicated set of accessories that can be integrated.

Lampada LED sottopensile con luce ad effetto diffuso omogeneo; 12V Emotion Dual Color 3000-4000K. Disponibile con o senza sensore infrarosso IRS per accensione/spegnimento e cambio temperatura EDC. È una lampada compatta di facile installazione tramite uso di viti; la fila continua e la personalizzazione in lunghezza non sono previste. Ha una linea di accessori dedicati per sfruttare al meglio lo spazio sottopensile.

FINISHES AVAILABLE

03 - Black

12 - Aluminum

SPECIFICATIONS

Surface mounted

Uniform light

Cable length

Class III insulation

CE marking

Accessories on next page

EMOTION DUAL COLOR VERSIONS (EDC)

	IR Switch	W	L mm	K	
2770007__00AGD	5,6	450	3000-4000	n.a.	
2770008__00AGD	7,5	600	3000-4000	n.a.	
2770009__00AGD	11,4	900	3000-4000	n.a.	
2770010__00AGD	15,3	1200	3000-4000	n.a.	
2770011__00AGD	23,1	1800	3000-4000	n.a.	
2770012__00AGD	30,9	2400	3000-4000	n.a.	

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
2770001__00AGD	5,6	450	3000-4000	Yes
2770002__00AGD	7,5	600	3000-4000	Yes
2770003__00AGD	11,4	900	3000-4000	Yes
2770004__00AGD	15,3	1200	3000-4000	Yes
2770005__00AGD	23,1	1800	3000-4000	Yes
2770006__00AGD	30,9	2400	3000-4000	Yes

TECHNICAL DRAWING

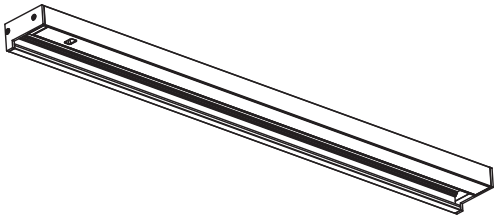



APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
900mm EDC	456	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM Easy domotica

IR DC/DC Very low voltage controller

RADIO SWITCH Low voltage controller

SMART Find more on pag. 8

CONTROLLERS Find more on pag. 82

ACCESSORIES
GHIBLI

FINISHES AVAILABLE

03 - Black

65 - Metallic grey

GHIBLI METAL SHELF “150”

CODE	
2770014__00	0,7 Kg/dm2

TECHNICAL DRAWING

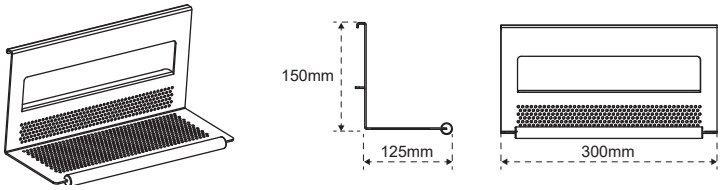

FINISHES AVAILABLE

03 - Black

65 - Metallic grey

GHIBLI METAL SHELF “250”

CODE	
2770013__00	0,7 Kg/dm2

TECHNICAL DRAWING

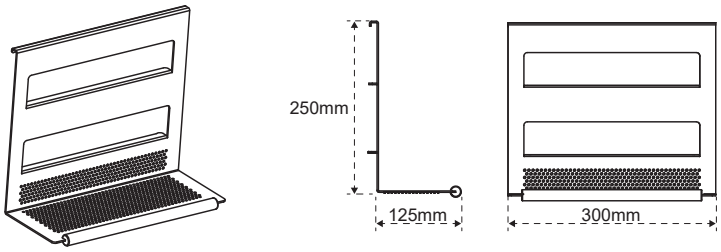

K CONCEPT

LED wall panel with no-dots effect direct and wall-washer lights; 24V with Emotion Dual Color 3000-4000K light. It has no control or sensor onboard. It's a compact lamp for easy installation by wall mounting fixing; the continuous row cannot be created but the lamp can be customized in length. Multiple panels can be combined by using the dedicated power sockets tower in between. It has a specific line of accessories (hooks, shelves, fire protection, ...).

Lampada LED per frontale cucina con luce diretta frontale e wall-washer ad effetto diffuso omogeneo; 24V a luce Emotion Dual Color 3000-4000K. Non ha sensori o interruttori integrati. È una lampada compatta di facile installazione tramite appositi fissaggi a muro; la fila continua non può essere creata, ma è prevista la personalizzazione in lunghezza. Più pannelli K Concept possono essere affiancati intervallandoli con la torretta prese dedicata. Linea di accessori dedicati (ganci, mensole, para fuoco, ...) per sfruttare al meglio lo spazio cucina.

FINISHES AVAILABLE

03 - Black

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking
- Accessories on next page

EMOTION DUAL COLOR VERSIONS (EDC) n°1 LIGHT SOURCE

	W	L mm	K	
27600240300APD	5,9	500	3000-4000	Yes
27600250300APD	7,2	600	3000-4000	Yes
27600260300APD	8,5	700	3000-4000	Yes
27600270300APD	9,8	800	3000-4000	Yes
27600280300APD	11,1	900	3000-4000	Yes
27600290300APD	15,0	1200	3000-4000	Yes
27600300300APD	18,9	1500	3000-4000	Yes
27600310300APD	22,8	1800	3000-4000	Yes
27600320300APD	30,6	2400	3000-4000	Yes
27600330300APD	34,5	2700	3000-4000	Yes
27600340300APD	38,4	3000	3000-4000	Yes

EMOTION DUAL COLOR VERSIONS (EDC) n°1 LIGHT SOURCE + WALLWASHER

	W	L mm	K	
27600460300APD	11,5	500	3000-4000	Yes
27600470300APD	14,1	600	3000-4000	Yes
27600480300APD	16,7	700	3000-4000	Yes
27600490300APD	19,3	800	3000-4000	Yes
27600500300APD	21,9	900	3000-4000	Yes
27600510300APD	29,7	1200	3000-4000	Yes
27600520300APD	37,5	1500	3000-4000	Yes
27600530300APD	45,3	1800	3000-4000	Yes
27600540300APD	60,9	2400	3000-4000	Yes
27600550300APD	68,7	2700	3000-4000	Yes
27600560300APD	76,5	3000	3000-4000	Yes

TECHNICAL DRAWING

K PANEL



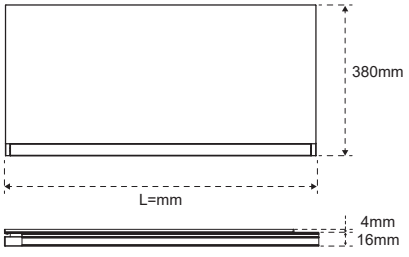

APPLICATIONS

Kitchen

POWER SUPPLIES & EXTENSION CORD

CODE	P(W)	I(A)
12507760001	max. 15	0,625
12505500002	max. 45	1,875

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

ACCESSORIES
K CONCEPT

K SOCKET MODULE

**2x SCHUKO SOCKET +
1x USB CHARGER**

03 - Black

Supply
220-240 V~

Cable length

Class I
insulation

CE marking

Kitchen

L mm
27600140300 45

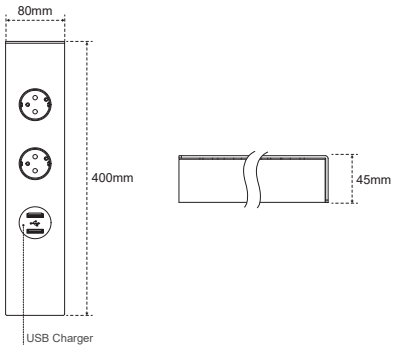

K BRACKET

03 - Black

CE marking

Kitchen

CODE	L mm	
27600150300	14x60	0,7Kg

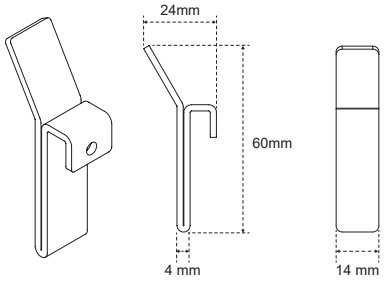

K METAL SHELF

03 - Black

CE marking

Kitchen

CODE	L mm	
27600160300	300	2Kg

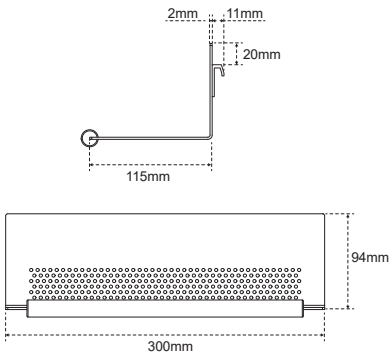

K GLASS SHELF

03 - Black

CE marking

Kitchen

CODE	L mm	
27600170300	300	1Kg

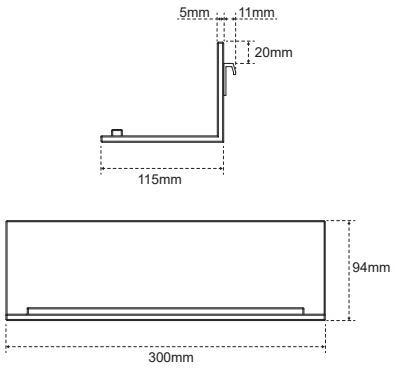

K ROLL HOLDER

03 - Black

CE marking

Kitchen

CODE	L mm
27600180300	320

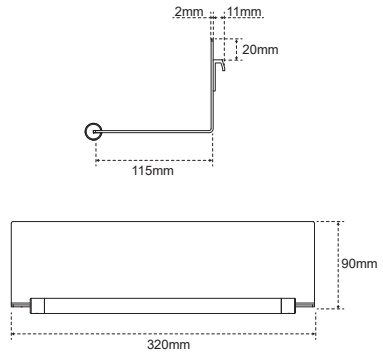

K FIRE PROTECTION

03 - Black

CE marking

Kitchen

CODE	L mm
27600190300	650
27600200300	950

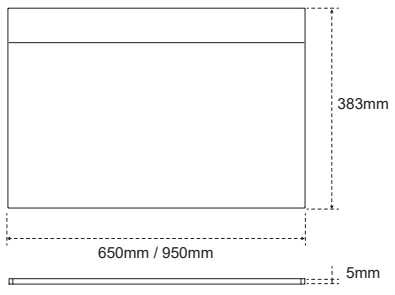

KUBI

Under or inside cabinet LED light, with light on 3 sides and no-dots effect, 12V in natural or warm white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available without or with IRS infrared switch for on/off, dimming or EDC temperature changing. It is a compact lamp for easy installation by using tape; the continuous row cannot be created but it can be customized in length, max 3m.
It can be used as alternative to BALI.

Lampada LED sottopensile o da interno pensile, sporgente con illuminazione su tre lati ed effetto diffuso omogeneo,12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; senza o con interruttore IRS a infrarossi per on/off, dimmerazione e cambio temperatura EDC.È una lampada compatta di facile installazione, mediante striscia adesiva; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt.
Alternativa al modello BALI.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	IR Switch	W	L mm	K	
25900050100ADD		4,9	450	3000-4000	n.a.
25900060100ADD		6,8	600	3000-4000	n.a.
25900070100ADD		10,7	900	3000-4000	n.a.
25900080100ADD		14,6	1200	3000-4000	n.a.

	W	L mm	K	
25900010100ADD	5,2	450	3000-4000	Yes
25900020100ADD	7,2	600	3000-4000	Yes
25900030100ADD	11,1	900	3000-4000	Yes
25900040100ADD	15,0	1200	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	IR Switch	W	L mm	K	
25900050100ANN		4,2	450	Natural White	n.a.
25900060100ANN		5,8	600	Natural White	n.a.
25900070100ANN		9,1	900	Natural White	n.a.
25900080100ANN		12,3	1200	Natural White	n.a.

	W	L mm	K	
25900010100ANN	4,4	450	Natural White	Yes
25900020100ANN	6,2	600	Natural White	Yes
25900030100ANN	9,3	900	Natural White	Yes
25900040100ANN	12,7	1200	Natural White	Yes

TECHNICAL DRAWING

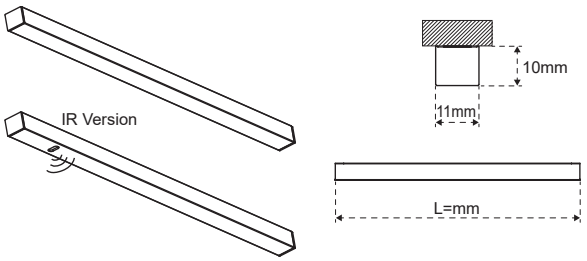

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

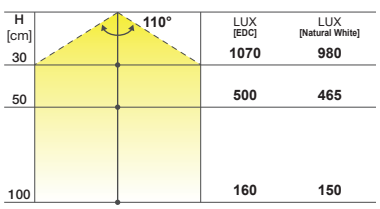

VERS.	LUMEN	Lm/W	CRI
900mm EDC	444	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

IKO

Under or inside cabinet LED light, with light directed to the working surface and no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K.
Available without or with IRS infrared switch for on/off, dimming or EDC temperature changing. It is a compact lamp for easy installation by using tape; the continuous row cannot be created but it can be customized in length, max 3m.
It can be used as alternative to LUGANO.

Lampada LED sottopensile o da interno pensile, sporgente con illuminazione direzionata sul piano di lavoro con effetto diffuso omogeneo,12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; senza o con interruttore IRS a infrarossi per on/off, dimmerazione e cambio temperatura EDC. È una lampada compatta di facile installazione, mediante striscia adesiva; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt. Alternativa al modello LUGANO.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
26200050100ADD	4,9	450	3000-4000	n.a.
26200060100ADD	6,8	600	3000-4000	n.a.
26200070100ADD	10,7	900	3000-4000	n.a.
26200080100ADD	14,6	1200	3000-4000	n.a.

	W	L mm	K	
26200010100ADD	5,2	450	3000-4000	Yes
26200020100ADD	7,2	600	3000-4000	Yes
26200030100ADD	11,1	900	3000-4000	Yes
26200040100ADD	15,0	1200	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
26200050100ANN	4,2	450	Natural White	n.a.
26200060100ANN	5,8	600	Natural White	n.a.
26200070100ANN	9,2	900	Natural White	n.a.
26200080100ANN	12,3	1200	Natural White	n.a.

	W	L mm	K	
26200010100ANN	4,4	450	Natural White	Yes
26200020100ANN	6,2	600	Natural White	Yes
26200030100ANN	9,5	900	Natural White	Yes
26200040100ANN	12,7	1200	Natural White	Yes

TECHNICAL DRAWING

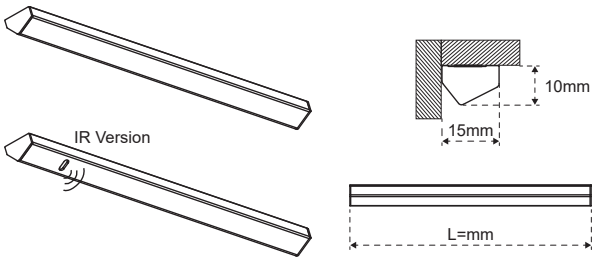

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

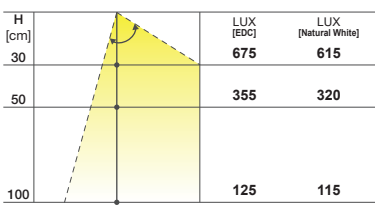

VERS.	LUMEN	Lm/W	CRI
900mm EDC	444	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8
CONTROLLERS
Find more on pag. 82

KEA

Inside cabinet LED light, with light directed to the inside and no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available without or with IRS infrared switch for on/off, dimming or EDC temperature changing. It is a compact lamp for easy installation by using tape; the continuous row cannot be created but it can be customized in length, max 3m.
It can be used as alternative to GENEVE.

Lampada LED da interno pensile, sporgente con illuminazione direzionata verso l'interno e con effetto diffuso omogeneo,12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; senza o con interruttore IRS a infrarossi per on/off, dimmerazione e cambio temperatura EDC. È una lampada compatta di facile installazione, mediante striscia adesiva; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt. Alternativa al modello GENEVE.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
26300050100ADD	4,9	450	3000-4000	n.a.
26300060100ADD	6,8	600	3000-4000	n.a.
26300070100ADD	10,7	900	3000-4000	n.a.
26300080100ADD	14,6	1200	3000-4000	n.a.

	W	L mm	K	
26300010100ADD	5,2	450	3000-4000	Yes
26300020100ADD	7,2	600	3000-4000	Yes
26300030100ADD	11,1	900	3000-4000	Yes
26300040100ADD	15,0	1200	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
26300050100ANN	4,2	450	Natural White	n.a.
26300060100ANN	5,8	600	Natural White	n.a.
26300070100ANN	9,2	900	Natural White	n.a.
26200080100ANN	12,3	1200	Natural White	n.a.

	W	L mm	K	
26300010100ANN	4,4	450	Natural White	Yes
26300020100ANN	6,2	600	Natural White	Yes
26300030100ANN	9,5	900	Natural White	Yes
26300040100ANN	12,7	1200	Natural White	Yes

TECHNICAL DRAWING

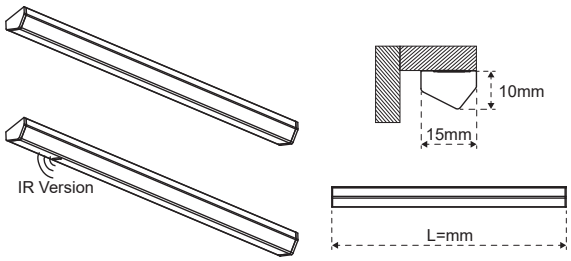

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

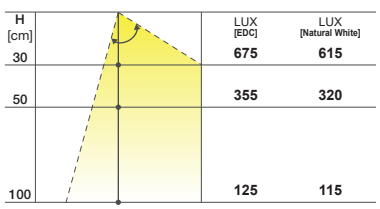

VERS.	LUMEN	Lm/W	CRI
900mm EDC	444	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

KALEO

Inside cabinet recessed LED light, with light directed to the inside and no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available without or with IRS infrared switch for on/off, dimming or temperature changing. Available also with IRD infrared door switch for on/off, dimming or EDC temperature changing. It is a compact lamp for installation by screws and clips; the continuous row cannot be created but it can be customized in length, max 3m.

Lampada LED a incasso da interno pensile, con illuminazione a led direzionata verso l'interno e con effetto diffuso omogeneo,12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; senza o con interruttore IRS a infrarossi, o sensore IRD a infrarossi con installazione ad anta, per on/off, dimmerazione e cambio temperatura della luce EDC. È una lampada compatta con installazione mediante clip; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
25100660100ADD	4,2	413	3000-4000	n.a.
25100680100ADD	6,2	563	3000-4000	n.a.
25100700100ADD	10,1	863	3000-4000	n.a.
25100720100ADD	14,0	1163	3000-4000	n.a.

	W	L mm	K	
25100320100ADD	4,9	413	3000-4000	Yes
25100330100ADD	6,8	563	3000-4000	Yes
25100340100ADD	10,7	863	3000-4000	Yes
25100350100ADD	14,6	1163	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
25100660100ANN	3,7	413	Natural White	n.a.
25100680100ANN	5,3	563	Natural White	n.a.
25100700100ANN	8,6	863	Natural White	n.a.
25100720100ANN	12,0	1163	Natural White	n.a.

	W	L mm	K	
25100320100ANN	4,0	413	Natural White	Yes
25100330100ANN	5,6	563	Natural White	Yes
25100340100ANN	9,0	863	Natural White	Yes
25100350100ANN	12,3	1163	Natural White	Yes

TECHNICAL DRAWING

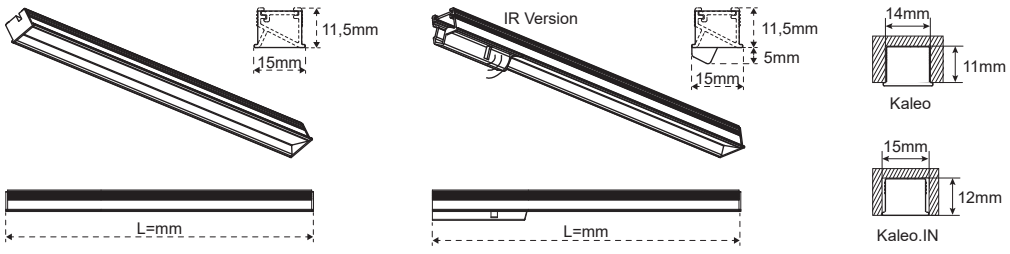

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

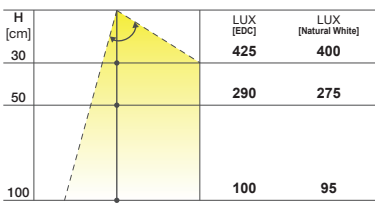

VERS.	LUMEN	Lm/W	CRI
863mm EDC	428	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

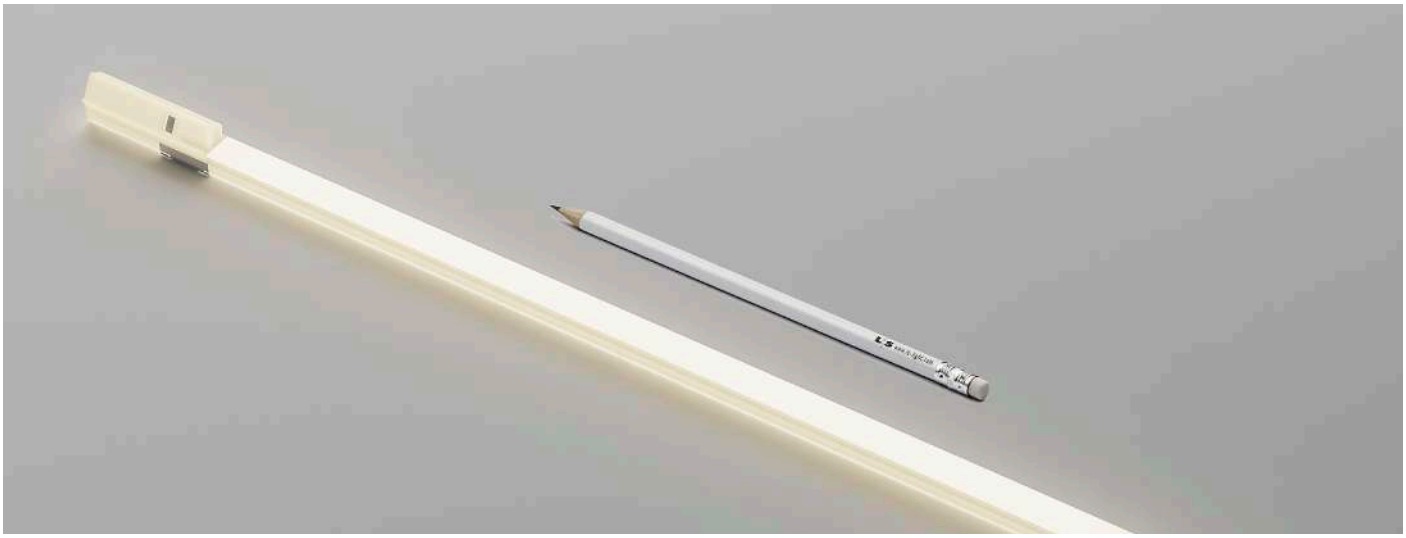

KENDO

Under or inside cabinet recessed LED light, with no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K.Available without or with IRS infrared switch for on/off, dimming or temperature changing. Available also with IRD infrared door switch for on/off, dimming or EDC temperature changing. It is a compact lamp for installation by screws and clips; the continuous row cannot be created but it can be customized in length, max 3m.
It can be used as alternative to MALINDI.

Lampada LED a incasso sottopensile o da interno pensile, con illuminazione ad effetto diffuso omogeneo,12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; senza o con interruttore IRS a infrarossi, o sensore IRD a infrarossi con installazione ad anta, per on/off, dimmerazione e cambio temperatura EDC. È una lampada compatta, con installazione mediante clip; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt. Alternativa al modello MALINDI.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	IR Switch	W	L mm	K	
24900300100ADD		3,9	372	3000-4000	n.a.
24900310100ADD		5,5	500	3000-4000	n.a.
24900320100ADD		8,8	760	3000-4000	n.a.
24900330100ADD		12,0	1000	3000-4000	n.a.

	W	L mm	K	
24900030100ADD	4,2	372	3000-4000	Yes
24900040100ADD	5,9	500	3000-4000	Yes
24900050100ADD	9,1	760	3000-4000	Yes
24900060100ADD	12,4	1000	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	IR Switch	W	L mm	K	
24900300100ANN		3,3	372	Natural White	n.a.
24900310100ANN		4,7	500	Natural White	n.a.
24900320100ANN		7,6	760	Natural White	n.a.
24900330100ANN		10,2	1000	Natural White	n.a.

	W	L mm	K	
24900030100ANN	3,7	372	Natural White	Yes
24900040100ANN	5,1	500	Natural White	Yes
24900050100ANN	7,9	760	Natural White	Yes
24900060100ANN	10,6	1000	Natural White	Yes

TECHNICAL DRAWING



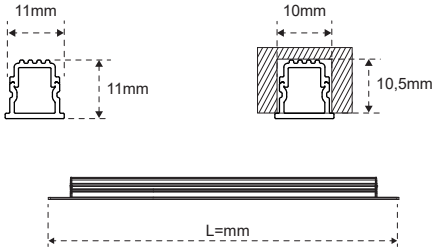

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

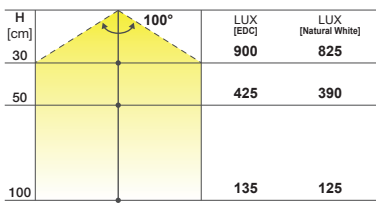

VERS.	LUMEN	Lm/W	CRI
760mm EDC	364	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

KENDO.IN

Under or inside cabinet fully recessed LED light, with no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available without or with IRS infrared switch for on/off, dimming or temperature changing. Available also with IRD infrared door switch for on/off, dimming or EDC temperature changing. It is a compact lamp for installation by screws and clips; the continuous row cannot be created but it can be customized in length, max 3m.
It can be used as alternative to MALINDI.IN

Lampada LED a incasso totale, sottopensile o da interno pensile, con illuminazione ad effetto diffuso omogeneo,12V a luce fissa 3000/4000K, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; senza o con interruttore IRS a infrarossi, o sensore IRD a infrarossi con installazione ad anta, per on/off, dimmerazione e cambio temperatura EDC. È una lampada compatta, con installazione mediante clip; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt. Alternativa al modello MALINDI.IN

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Recessed
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
26100240100ADD	4,6	413	3000-4000	n.a.
26100250100ADD	6,5	563	3000-4000	n.a.
26100260100ADD	10,4	863	3000-4000	n.a.
26100270100ADD	14,3	1163	3000-4000	n.a.

	W	L mm	K	
26100010100ADD	4,9	413	3000-4000	Yes
26100020100ADD	6,8	563	3000-4000	Yes
26100030100ADD	10,7	863	3000-4000	Yes
26100040100ADD	14,6	1163	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
26100240100ANN	3,9	413	Natural White	n.a.
26100250100ANN	5,5	563	Natural White	n.a.
26100260100ANN	8,8	863	Natural White	n.a.
26100270100ANN	12,0	1163	Natural White	n.a.

	W	L mm	K	
26100010100ANN	4,2	413	Natural White	Yes
26100020100ANN	5,8	563	Natural White	Yes
26100030100ANN	9,1	863	Natural White	Yes
26100040100ANN	12,5	1163	Natural White	Yes

TECHNICAL DRAWING



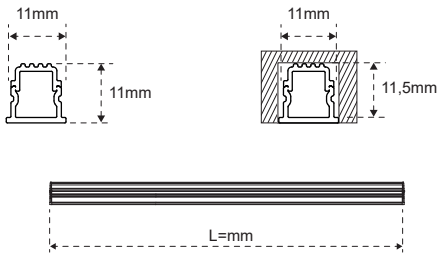

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

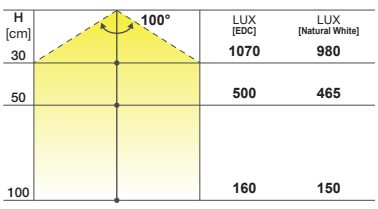

VERS.	LUMEN	Lm/W	CRI
863mm EDC	428	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

LUGANO IP44

Undercabinet LED light, with directed light and no dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available without or with IR infrared switch for on/off, dimming or EDC temperature changing. It is a IP44 compact lamp for easy installation by screws and clips; the continuous row cannot be created, but it can be customized in length, max 3m.
It can be used as alternative to LUGANO.

Lampada LED sottopensile, con illuminazione direzionata ad effetto diffuso omogeneo, 12V a luce fissa natural white, in altre temperature a richiesta, o Emotion Dual Color 3000-4000K. Disponibile con o senza sensore IR a infrarosso per on/off, dimmerazione e cambio temperatura EDC. È una lampadata compatta IP44, di facile installazione tramite clip; la fila continua non è prevista, ma è possibile personalizzare la lunghezza fino a 3mt. Alternativa al modello LUGANO.

FINISHES AVAILABLE

12 - Aluminum

EMOTION DUAL COLOR VERSIONS (EDC)

	IR Switch	W	L mm	K	
20600441200AGD		4,9	450	3000-4000	n.a.
20600451200AGD		6,8	600	3000-4000	n.a.
20600461200AGD		10,7	900	3000-4000	n.a.
20600471200AGD		14,6	1200	3000-4000	n.a.

NATURAL WHITE VERSIONS (NW)

	IR Switch	W	L mm	K	
20600441200CN		4,6	450	Natural White	n.a.
20600441200CN		6,2	600	Natural White	n.a.
20600441200CN		9,7	900	Natural White	n.a.
20600441200CN		13,3	1200	Natural White	n.a.

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

TECHNICAL DRAWING

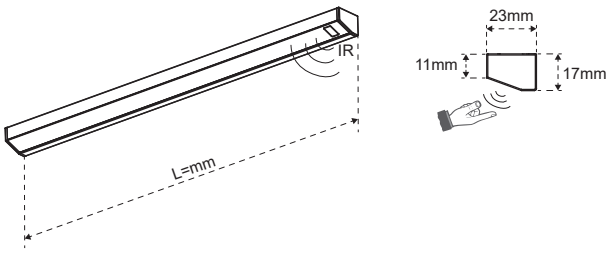

APPLICATIONS

Kitchen

ILLUMINANCE

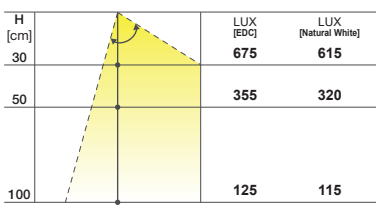

VERS.	LUMEN	Lm/W	CRI
900mm EDC	428	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

BALI

Under or inside cabinet LED light, with no dots effect, 12V in natural white or other temperatures on request.
Available without or with touch controller to switch on/off and dim the light.
It is a compact lamp for easy installation, by using screws and plastic clips; the continuous row cannot be created but it can be customized in length, max 3m

Lampada LED sottopensile o da interno pensile, sporgente con illuminazione ad effetto diffuso omogeneo,12V a luce fissa natural white o in altre temperature a richiesta; disponibile senza o con senza interruttore touch per accensione, spegnimento e dimmerazione della luce.
È una lampada compatta di facile installazione, mediante delle clips, non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
15902371201CN	3,9	450	Natural White	n.a.
15902381201CN	5,9	600	Natural White	n.a.
15902391201CN	9,1	900	Natural White	n.a.
15902401201CN	12,7	1200	Natural White	n.a.

	W	L mm	K	
15902331200CN	4,6	450	Natural White	Yes
15902341200CN	6,2	600	Natural White	Yes
15902351200CN	9,8	900	Natural White	Yes
15902361200CN	13,3	1200	Natural White	Yes

TECHNICAL DRAWING



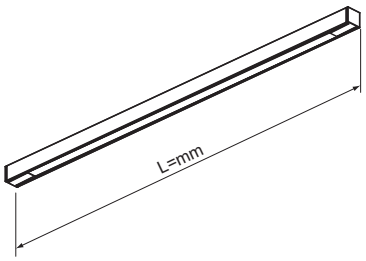

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
900mm NW	395	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

MALINDI2

Recessed undercabinet or inside cabinet LED light, with no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available without or with IR infrared switch for on/off, dimming or EDC temperature changing. It is a compact lamp for installation by screws and clips; the continuous row cannot be created, but it can be customized in length, max 3m.
It can be used as alternative to LUGANO.

Lampada LED sottopensile o interno armadio ad incasso, con illuminazione ad effetto diffuso omogeneo, 12V a luce fissa natural white, in altre temperature a richiesta, o Emotion Dual Color 3000-4000K. Disponibile con o senza sensore IR a infrarosso per on/off, dimmerazione e cambio temperatura EDC. È una lampadata compatta con installazione tramite clip; la fila continua non è prevista, ma è possibile personalizzare la lunghezza fino a 3mt. Alternativa al modello LUGANO.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
27000120100AGD	3,6	372	3000-4000	n.a.
27000130100AGD	5,2	500	3000-4000	n.a.
27000140100AGD	8,8	760	3000-4000	n.a.
27000150100AGD	11,7	1000	3000-4000	n.a.

	W	L mm	K	
27000010100AGD	4,2	372	3000-4000	Yes
27000020100AGD	5,9	500	3000-4000	Yes
27000030100AGD	9,1	760	3000-4000	Yes
27000040100AGD	12,3	1000	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
27000120100CN	3,2	372	Natural White	n.a.
27000130100CN	4,9	500	Natural White	n.a.
27000140100CN	7,8	760	Natural White	n.a.
27000150100CN	10,7	1000	Natural White	n.a.

	W	L mm	K	
27000010100CN	3,9	372	Natural White	Yes
27000020100CN	5,2	500	Natural White	Yes
27000030100CN	8,5	760	Natural White	Yes
27000040100CN	11,1	1000	Natural White	Yes

TECHNICAL DRAWING





Dimensione Fresata / Drill Dimension / Ausmab der fräsarbeit / Medida del corte / Mesures fraise

L= L. lamp - 14mm





APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

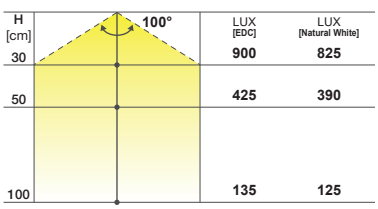

VERS.	LUMEN	Lm/W	CRI
760mm EDC	364	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

KITON

Inside drawer or cabinet LED light, directed both to the inside and outside with no-dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available with IR infrared sensor for on/off by opening/closing the drawer or the door, or for temperature changing by opening/closing 3 times in a row. It is a compact lamp for easy installation by using screws and clips; the continuous row cannot be created but it can be customized in length, max 3m. It can be used as alternative to DETROIT.

Lampada LED da interno cassettone o interno pensile, con luce direzionata verso l'interno e l'esterno ed effetto diffuso omogeneo,12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K; con interruttore IR a infrarossi per on/off tramite apertura cassettone o anta battente, e cambio temperatura EDC tramite apertura/chiusura per 3 volte di seguito. Compatta di facile installazione mediante clip; non è prevista la fila continua ma si può personalizzare in lunghezza, max 3mt. Alternativa al modello DETROIT.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	VERS.
26800011200ADD	4,6	411	3000-4000	1 IR
26800021200ADD	5,2	461	3000-4000	1 IR
26800031200ADD	6,5	561	3000-4000	1 IR
26800041200ADD	9,1	761	3000-4000	2 IR
26800051200ADD	10,4	861	3000-4000	2 IR
26800061200ADD	14,3	1161	3000-4000	2 IR

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	VERS.
26800011200ANN	3,9	411	Natural White	1 IR
26800021200ANN	4,4	461	Natural White	1 IR
26800031200ANN	5,5	561	Natural White	1 IR
26800041200ANN	7,7	761	Natural White	2 IR
26800051200ANN	8,8	861	Natural White	2 IR
26800061200ANN	12,1	1161	Natural White	2 IR

TECHNICAL DRAWING



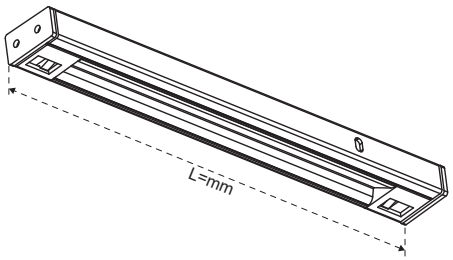

For 15, 16, 18, 19mm board thickness

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE

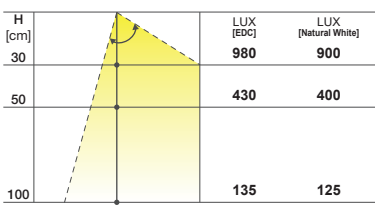

VERS.	LUMEN	Lm/W	CRI
900mm EDC	468	45	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

PARIS

Integrated undercabinet LED light directed up and down, with no-dots effect; 12V in natural white or other temperatures on request. Available without or with IR sensor for on/on. It's a compact lamp that replaces the kitchen cabinet base; the continuous row cannot be created, but the lamp can be customized in length.

Lampada LED fondopensile integrata con illuminazione verso l'alto e verso il basso, ad effetto diffuso omogeneo; 12V a luce fissa natural white o altre temperature luce a richiesta. Disponibile senza o con sensore IR ad infrarosso per accessione/spegnimento. È una lampada compatta che funge da fondo pensile; la fila continua non è prevista, ma è personalizzabile in lunghezza.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

Semi - Recessed

Uniform light

Cable length

Class III insulation

CE marking

NATURAL WHITE VERSIONS (NW)

	W	L mm	K			
21200371200CN	4,3	413	Natural White	n.a.	0,6 Kg/dm2
21200381200CN	5,9	563	Natural White	n.a.	0,6 Kg/dm2
21200391200CN	9,5	863	Natural White	n.a.	0,6 Kg/dm2
21200401200CN	13,1	1163	Natural White	n.a.	0,6 Kg/dm2

	W	L mm	K			
21200331200CN	4,3	413	Natural White	Yes	0,6 Kg/dm2
21200341200CN	5,9	563	Natural White	Yes	0,6 Kg/dm2
21200351200CN	9,5	863	Natural White	Yes	0,6 Kg/dm2
21200361200CN	13,1	1163	Natural White	Yes	0,6 Kg/dm2

TECHNICAL DRAWING

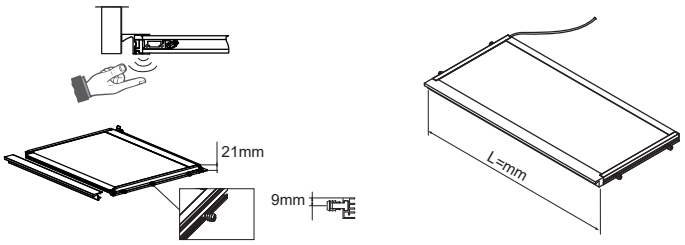

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
863mm EDC	430	45	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

OSLO

Integrated undercabinet LED light with no-dots effect; 12V in natural white or other temperatures on request. Available without or with IR sensor for on/on. It's a compact lamp integrated to the cabinet by fixing it to the lateral panels; the continuous row cannot be created, but it can be customized in length, max 3m.

Lampada LED sottopensile integrata con illuminazione ad effetto diffuso omogeneo; 12V a luce fissa natural white o altre temperature a richiesta. Disponibile senza o con sensore IR ad infrarosso per accessione/spegnimento. È una lampada compatta che si integra al pensile tramite fissaggio sui pannelli laterali; la fila continua non è prevista, ma è personalizzabile in lunghezza, fino a 3mt.

FINISHES AVAILABLE

12 - Aluminum

NATURAL WHITE VERSIONS (NW)

18800491201CN	3,2	413	Natural White	n.a.
18800501201CN	5,2	563	Natural White	n.a.
18800511201CN	8,8	863	Natural White	n.a.
18800521201CN	12,0	1163	Natural White	n.a.

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length
- Class III insulation
- CE marking

TECHNICAL DRAWING

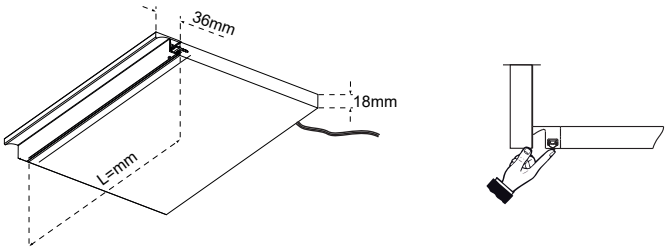

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
863mm EDC	440	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

LUMI

Undercabinet or undershelf LED light, with no dots effect, 12V in natural white or other light temperatures on request. Available without or with touch controller to switch on/off and dim the light (in steps). It is a compact lamp for easy installation by screws and clips; the continuous raw can be created by using the related connector (included). Not customizable in length.

Lampada a LED sottopensile o sottomensola, con illuminazione ad effetto diffuso omogeneo, 12V a luce fissa natural white o in altre temperature a richiesta. Disponibile senza o con interruttore touch per on/off e dimmerazione a step della luce. È una lampada compatta di facile installazione mediante clip; è prevista la fila continua tramite l'uso del connettore in dotazione. Non è personalizzabile in lunghezza.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2,5m
- Class III insulation
- CE marking

NATURAL WHITE VERSIONS (NW)

		W	L mm	K	
23600011200ZN	4,0	370	Natural White	n.a.	
23600021200ZN	5,5	520	Natural White	n.a.	

	W	L mm	K	
23600031200ZN	4,0	370	Natural White	Yes
23600041200ZN	5,5	520	Natural White	Yes

TECHNICAL DRAWING

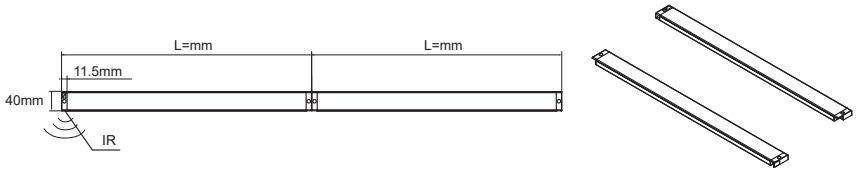

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
520mm NW	250	45	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

MINI CORNER

Undercabinet or undershelf LED light, with no-dots effect, 12V in natural white or other light temperatures on request. Available without or with touch controller to switch on/off and dim the light (in steps). It is a compact lamp for easy installation by screws and clips; the continuous raw can be created by using the related connector (included). Not customizable in length.

Lampada a LED sottopensile o sottomensola, con illuminazione ad effetto diffuso omogeneo, 12V a luce fissa natural white o in altre temperature a richiesta. Disponibile senza o con interruttore touch per on/off e dimmerazione a step della luce. È una lampada compatta di facile installazione mediante clip; è prevista la fila continua tramite l'uso del connettore in dotazione. Non è personalizzabile in lunghezza.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

Surface mounted

Uniform light

Cable length

Class III insulation

CE marking

NATURAL WHITE VERSIONS (NW)

	Touch	W	L mm	K	
23500011200ZN		4,0	450	Natural White	n.a.
23500021200ZN		4,5	500	Natural White	n.a.
23500031200ZN		6,0	600	Natural White	n.a.
23500041200ZN		9,0	900	Natural White	n.a.
23500051200ZN		12,0	1200	Natural White	n.a.

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
23500061200ZN	4,0	450	Natural White	Yes
23500071200ZN	4,5	500	Natural White	Yes
23500081200ZN	6,0	600	Natural White	Yes
23500091200ZN	9,0	900	Natural White	Yes
23500101200ZN	12,0	1200	Natural White	Yes

TECHNICAL DRAWING

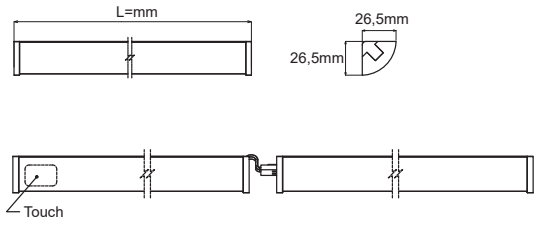

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
900mm NW	495	55	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

FLY LIGHT

LED light for glass shelves back, with no dots effect, 12V in natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. It can be attached to glass shelves up to 8mm thickness. It's a compact lamp for easy installation by sticking the glass shelf inside the fixture; the continuous row cannot be created, but it can be customized in length, max 3m.

Lampada LED per mensole in vetro con effetto diffuso omogeneo, 12V a luce fissa natural white, disponibile in altre temperature a richiesta, o Emotion Dual Color 3000-4000K. È una lampada compatta di facile installazione inserendo la mensola di vetro nell'apposito scanso della lampada; è compatibile con mensole in vetro fino a 8mm di spessore. La fila continua non è prevista, ma la lampada è personalizzabile in lunghezza, fino a 3mt.

FINISHES AVAILABLE

65 - Metallic grey

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
16900516500AGD	4,9	410	3000-4000	Yes
16900526500AGD	6,5	560	3000-4000	Yes
16900536500AGD	10,4	860	3000-4000	Yes
16900546500AGD	14,3	1160	3000-4000	Yes

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
16900166500GN	2,6	413	Natural White	Yes
16900136500GN	3,9	563	Natural White	Yes
16900146500GN	6,2	863	Natural White	Yes
16900156500GN	8,5	1163	Natural White	Yes

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

TECHNICAL DRAWING

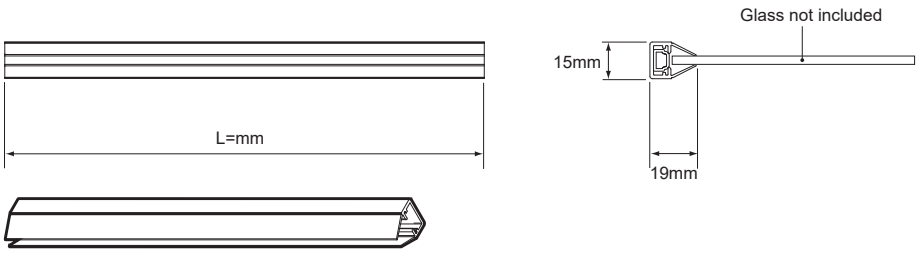

APPLICATIONS

- Kitchen
- Livingroom

ILLUMINANCE

BASED ON SELECTED GLASS

VERS.	LUMEN	Lm/W	CRI
860mm EDC	416	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

PAPER SHELF

Wall LED light directed up and down, with no-dots effect; 230V with integrated driver, in natural white or other light temperatures on request. Available with on/off switch. It's a ready-to-use compact lamp with installation by using wall screws. The continuous row and the length customization are not available.

Lampada a muro con illuminazione verso l'alto e verso il basso ad effetto diffuso omogeneo; 230V con alimentatore integrato, a luce fissa natural white o altre temperature luce a richiesta. Disponibile con interruttore on/off. È una lampada compatta pronta all'uso, per installazione tramite fissaggio a muro con viti. La fila continua e la personalizzazione in lunghezza non sono previste.

FINISHES AVAILABLE

12 - Aluminum

03 - Black

NATURAL WHITE VERSIONS (NW)

	Switch	W	L mm	K	
2750001__00ANN		4,4	450	Natural White	0,7 Kg/dm2
2750002__00ANN		6,0	600	Natural White	0,7 Kg/dm2
2750003__00ANN		9,3	900	Natural White	0,7 Kg/dm2
2750004__00ANN		12,5	1200	Natural White	0,7 Kg/dm2

SPECIFICATIONS

Surface mounted

Uniform light

Cable length

Class II insulation

CE marking

TECHNICAL DRAWING

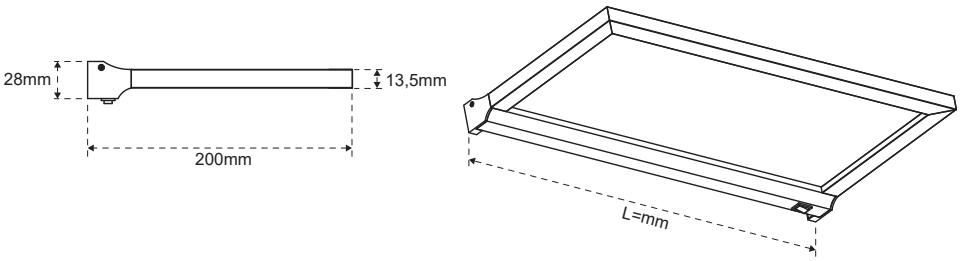

APPLICATIONS

Kitchen

Livingroom

Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
900mm EDC	1004	108	>80

SKUBA

12Vdc | LED | IP44 | CUSTOM

Under draining board LED light, with directed light and no-dots effect; 12V in natural white or other temperatures on request. Available with touch sensor for on/off switching. It's a compact IP44 light with installation by screws and clips; the continuous row cannot be created, but the lamp is customizable in length.

Lampada LED sotto scolapiatti, con luce direzionata ad effetto diffuso omogeneo; 12V a luce fissa natural white o altre temperature luce a richiesta. Disponibile con interruttore touch per accessione/spegnimento e dimmerazione. È una lampada compatta IP44 con installazione tramite clip; la fila continua non è prevista, ma la lampada è personalizzabile in lunghezza.

FINISHES AVAILABLE

00 - Transparent

NATURAL WHITE VERSIONS (NW)

	LED	Touch	W	L mm	K	
18500010001CN			3,5	480	Natural White	n.a.
18500020001CN			5,0	663	Natural White	n.a.
18500030001CN			6,5	846	Natural White	n.a.

SPECIFICATIONS

- Surface mounted
- Visible dot light
- Cable length ~2,5m
- Class III insulation
- CE marking

TECHNICAL DRAWING

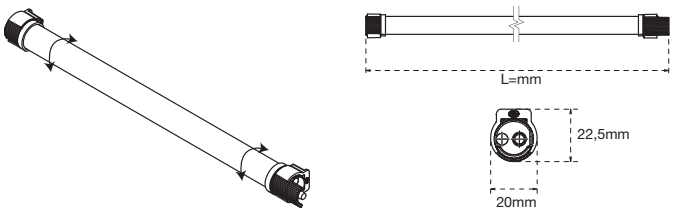

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
846mm EDC	300	45	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

STAR LIGHT

Undercabinet LED point light; 12V in natural white or other light temperatures on request. It has a touch switch onboard for on/off. Compact lamp for easy installation by using screws; the continuous row and the length customization are not available.

Lampada LED sottopensile con luce diretta ad effetto puntiforme; 12V a luce fissa natural white o altre temperature a richiesta. Dotata di interruttore touch per accensione/spegnimento. È una lampada compatta di facile installazione tramite viti; la fila continua e la personalizzazione in lunghezza non sono previste.

FINISHES AVAILABLE

12 - Aluminum

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
27800011200ZN	6,2	600	Natural White	4
27800021200ZN	7,2	900	Natural White	6
27800031200ZN	9,6	1200	Natural White	8

SPECIFICATIONS

- Surface mounted
- Visible dot light
- Cable length ~2,5m
- Class III insulation
- CE marking

TECHNICAL DRAWING

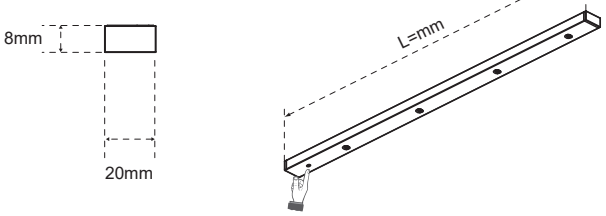

APPLICATIONS

Kitchen

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
900mm NW	302	42	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

NUBIO

Toe kick lighting and undercounter top illumination LED light, with directed light and no-dots effect,12V o 24V in natural white or other temperatures based on the selected strip reeel. It is a compact lamp with installation by using tape. There are no sensors onboard; the continuous row it's not available, but it can be customized in length by cutting, up to 3m.

Lampada LED sottotop o zoccolo cucina, con luce direzionata ad effetto diffuso omogeneo; 12V o 24V a luce fissa natural white o altre temperature luce, in base alla strip reel selezionata. È una lampada compatta con installazione tramite striscia adesiva. Non sono previsti sensori integrati; la fila continua non è prevista, ma può essere personalizzata in lunghezza tramite taglio, fino a 3mt.

FINISHES AVAILABLE

85 - Nickel

SPECIFICATIONS

Surface mounted

Can be cut

CE marking

PROFILE + COVER

	L mm
19700208500	3000

KIT WITH 2 END CAPS

	L mm
12418688500	372

INNER CORNER

	REF.
13201368500	A

OUTER CORNER

	REF.
13201358500	B

TECHNICAL DRAWING

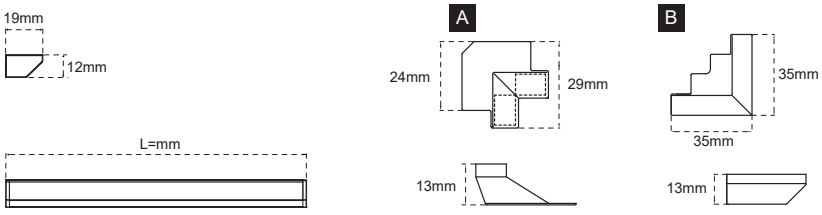

APPLICATIONS

Kitchen

ILLUMINANCE

BASED ON SELECTED STRIP REEL

VERS.	LUMEN	Lm/W	CRI

PERTH

Inside cabinet LED light, with directed light and no-dots effect; 12V in natural white, other light temperatures on request, or Emotion Dual Color 3000-4000K. Available with PIR movement sensor for on/off switching by opening/closing the door. It's a compact lamp with installation by screws and clips. The continuous row cannot be created, but the lamp can be customized in length, max 3m.

Lampada LED da interno armadio, con luce direzionata ad effetto diffuso omogeneo; 12V a luce fissa natural white, altre temperature a richiesta, o Emotion Dual Color 3000-4000K. Disponibile con sensore di movimento PIR per accensione/spegnimento tramite apertura/chiusura anta. Lampada compatta con installazione tramite clip; la fila continua non è prevista, ma è possibile personalizzare la lunghezza, fino a 3mt.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	Sensor	W	L mm	K	
17700761200AGD		6,2	550	3000-4000	n.a.
17700771200AGD		10,1	850	3000-4000	n.a.
17700781200AGD		11,4	950	3000-4000	n.a.
17700791200AGD		14,0	1150	3000-4000	n.a.

NATURAL WHITE VERSIONS (NW)

	Sensor	W	L mm	K	
17700551200CN		3,9	400	Natural White	n.a.
17700561200CN		3,9	413	Natural White	n.a.
17700571200CN		5,5	550	Natural White	n.a.
17700581200CN		5,6	563	Natural White	n.a.
17700591200CN		9,1	850	Natural White	n.a.
17700601200CN		9,4	863	Natural White	n.a.
17700611200CN		10,4	950	Natural White	n.a.
17700621200CN		12,7	1150	Natural White	n.a.
17700631200CN		12,7	1163	Natural White	n.a.

TECHNICAL DRAWING

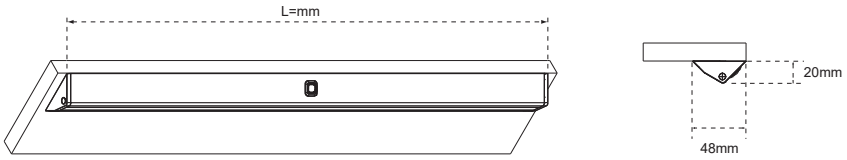

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE

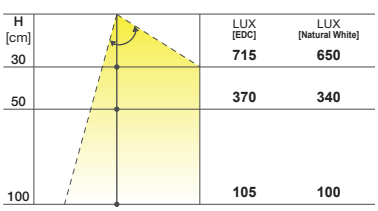

VERS.	LUMEN	Lm/W	CRI
850mm EDC	505	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

MISKA

Recessed inside cabinet LED light, with no-dots effect, 12V in natural white or other light temperatures on request. Available with PIR movement sensor for switching the light on/off by opening/closing the door. It is a compact lamp for installation by screws and clips; the continuous row cannot be created, but it can be customized in length, max 3m.

Lampada LED da interno armadio ad incasso, con illuminazione ad effetto diffuso omogeneo, 12V a luce fissa natural white, o altre temperature a richiesta. Disponibile con sensore PIR di movimento per accensione/spegnimento tramite aperura/chiusura dell'anta. È una lampadata compatta con installazione tramite clip; la fila continua non è prevista, ma è personalizzabile in lunghezza, fino a 3mt.

FINISHES AVAILABLE

10 - Grey

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
22000011000CN	3,3	372	Natural White	n.a.
22000021000CN	4,9	500	Natural White	n.a.
22000031000CN	7,8	760	Natural White	n.a.
22000041000CN	10,7	1000	Natural White	n.a.

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length
- Class III insulation
- CE marking

TECHNICAL DRAWING

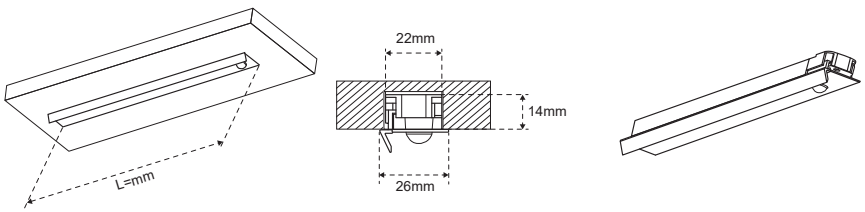

APPLICATIONS

Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
760mm NW	315	40	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

ELBA

Inside cabinet LED light, with directed light and no dots effect, 12V in natural white or other light temperatures on request. Available with PIR movement sensor to switch on/off by opening/closing the door. It is a compact lamp, with installation by using screws and clips; the continuous row cannot be created. Not customizable in length.

Lampada LED per interno armadio, con luce direzionata ed effetto diffuso omogeneo, 12V a luce fissa 3000/4000K o in altre temperature a richiesta; disponibile con sensore di movimento PIR per on/off tramite apertura/chiusura dell'anta. È una lampada compatta, con installazione mediante clip; la fila continua non è prevista. Non è possibile personalizzare la lunghezza.

FINISHES AVAILABLE

01 - White

12 - Aluminum

NATURAL WHITE VERSIONS (NW)

	Sensor	W	L mm	K	
1990002__00RN		2,3	195	Natural White	n.a.

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~3m
- Class III insulation
- CE marking

TECHNICAL DRAWING

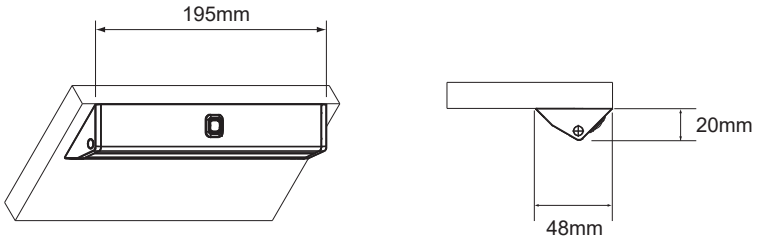

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE

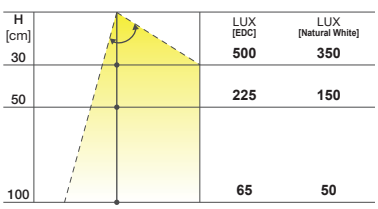

VERS.	LUMEN	Lm/W	CRI
NW	115	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CAPRI

Recessed LED light for inside cabinet, with directed light and no-dots effect, 12V in natural white, other light temperatures on request, or Emotion Dual Color 3000-4000K. Available with PIR movement sensor to switch on/off by opening/closing the door. It is a compact lamp, with installation by using screws and clips; the continuous row cannot be created. Not customizable in length.

Lampada LED ad incasso per interno armadio, con luce direzionata ed effetto diffuso omogeneo, 12V a luce fissa natural white, altre temperature a richiesta, o Emotion Dual Color 3000-4000K; disponibile con sensore di movimento PIR per on/off tramite apertura/chiusura dell'anta. È una lampada compatta, con installazione mediante clip; la fila continua non è prevista. Non è possibile personalizzare la lunghezza.

FINISHES AVAILABLE

12 - Aluminum

EMOTION DUAL COLOR VERSIONS (EDC)

	Sensor	W	L mm	K	
19000101200AGD		2,0	195	3000-4000	n.a.

NATURAL WHITE VERSIONS (NW)

	Sensor	W	L mm	K	
19000051200RN		2,3	195	Natural White	n.a.

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length ~3m
- Class III insulation
- CE marking

TECHNICAL DRAWING

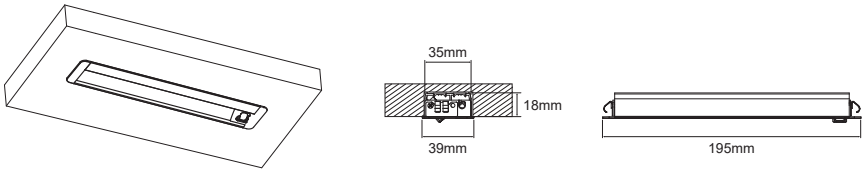

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE

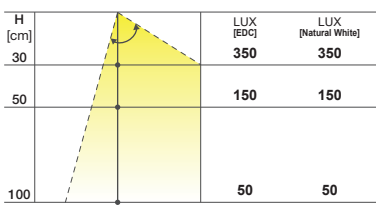

VERS.	LUMEN	Lm/W	CRI
EDC	115	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

FREE LED

Inside cabinet LED light, with no-dots effect, 12V in natural white or other light temperatures on request. It has no sensors onboard, but an external sensor can be integrated for on/off (kit available). Installation by using screws and clips; the continuous row cannot be created, but it can be customized in length, max 3m. Alternative to the FREE model.

Lampada LED per interno armadio, con illuminazione ad effetto diffuso omogeneo, 12V a luce fissa natural white o in altre temperature a richiesta. Non è dotata di sensori, ma può essere application un sensore esterno per accensione/spegnimento (vedi kit). Installazione mediante clip; la fila continua non è prevista, ma è possibile personalizzare la lunghezza, fino a 3mt. Alternativa al modello FREE.

FINISHES AVAILABLE

12 - Aluminum

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class III insulation
- CE marking

NATURAL WHITE VERSIONS (NW)

	W	L mm	K	
15600451200CN	5,5	540	Natural White	Yes
15600461200CN	7,8	750	Natural White	Yes
15600471200CN	9,4	870	Natural White	Yes
15600481200CN	11,4	1050	Natural White	Yes

KIT SENSOR + POWER SUPPLY (sold separately)

	W	V~	I(A)	
12601590103	max 15	220-240	max 1.25	n.a.
12601600103	max 45	220-240	max 3.75	n.a.

TECHNICAL DRAWING

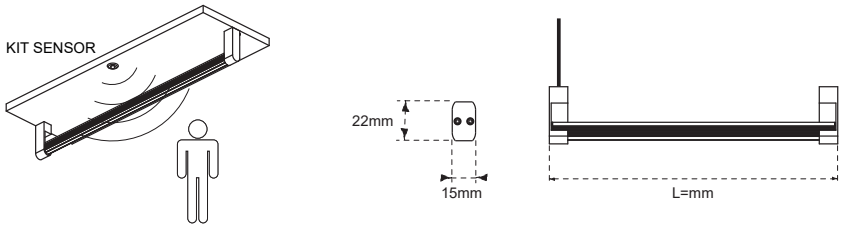

APPLICATIONS

Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
870mm NW	375	40	>80

FREEDOM PLUS

Courtesy light or for shelf units, with 180° illumination and no-dots effect; 230V with integrated driver, in natural white or other temperatures on request. It has no sensors onboard. It is a compact lamp for installation by screws and clips; the continuous row can be created by using the related connector (included). Not customizable in length. It can be used as alternative to FREEDOM.

Lampada a LED di cortesia o per scaffalature, con illuminazione a 180° ad effetto diffuso omogeneo; 230V con alimentatore integrato, a luce fissa natural white o in altre temperature a richiesta. È una lampada compatta di facile installazione mediante clip; è prevista la fila continua tramite l'uso del connettore in dotazione. Non è personalizzabile in lunghezza. Alternativa al modello FREEDOM.

FINISHES AVAILABLE

01 - White

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2m
- Class II insulation
- CE marking

NATURAL WHITE VERSIONS (FIXING KIT INCLUDED)

	W	L mm	K	X
22500410100ZN	3,8	307	Natural White	276
22500420100ZN	6,8	536	Natural White	505
22500430100ZN	7,2	568	Natural White	537
22500440100ZN	10,8	868	Natural White	837
22500450100ZN	14,5	1168	Natural White	1137
22500460100ZN	18,0	1468	Natural White	1437

VERTICAL FIXING KIT (optional)

13200360000

TECHNICAL DRAWING

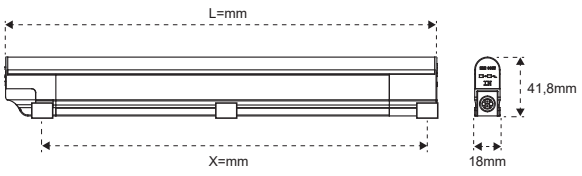



APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
868mm NW	1440	133	>80

SPOT

LEGIS

Bed headboard LED light with directed light and no-dots effect; 12V in warm white or other temperatures on request. It has a touch switch for on/off and a USB port. It's a compact lamp for installation by using screws.

Lampada a LED per testiera letto con luce direzionata ad effetto diffuso omogeneo; 12V a luce fissa warm white o altre temperature a richiesta. Dotata di interruttore touch per accensione/spegnimento e porta USB. Lampada compatta per installazione tramite viti.

FINISHES AVAILABLE

65 - Metallic grey

WARM WHITE VERSION (WW)

		W	L mm	K
28000016500ZW		1,2	480	Warm White

SPECIFICATIONS

- Surface mounted
- Visible dot light
- Cable length ~2,5m
- Class III insulation
- CE marking

TECHNICAL DRAWING

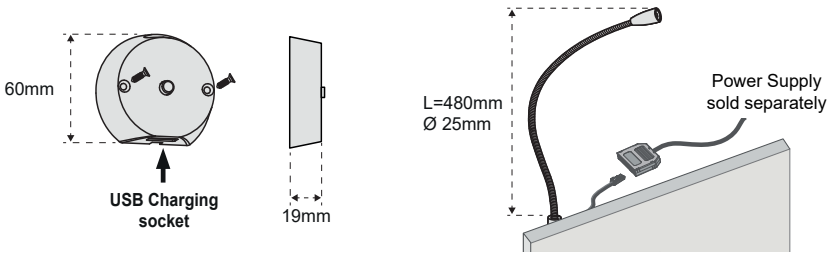

APPLICATIONS

Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
WW	70	70	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

AREA LIGHT

Bed headboard LED light with directed light and no-dots effect; 12V with external driver (included) in natural white or other light temperatures on request. It has a touch sensor for on/off and 2 steps dimmering. It's a compact lamp for installation by clips; the continuous row and the length customization are not available.

Lampada a LED per testiera letto con luce direzionata ad effetto diffuso omogeneo; 12V con alimentatore esterno (incluso) e luce fissa natural white o altre temperature a richiesta. Dotata di sensore touch per accensione/spegnimento e dimmerazione in 2 step. Lampada compatta per installazione tramite clip; la fila continua e la personalizzazione in lunghezza non sono disponibili.

FINISHES AVAILABLE

01 - White

03 - Black

SPECIFICATIONS

Surface mounted

Visible dot light

Cable length

Class III insulation

CE marking

NATURAL WHITE VERSIONS
(NW) KIT: 1x AREA LIGHT + 1x POWER SUPPLY

	Switch	W	L mm	K	
1330024__00		1,4	400	Natural White	n.a.

NATURAL WHITE VERSIONS
(NW) KIT: 2x AREA LIGHT + 1x POWER SUPPLY

	Switch	W	L mm	K	
1330025__00		1,4	400	Natural White	n.a.

TECHNICAL DRAWING

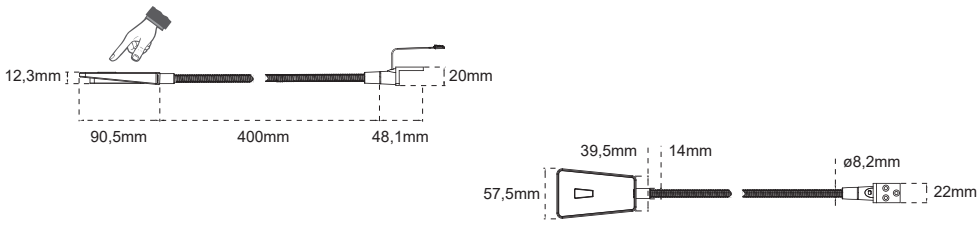

APPLICATIONS

Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	110	79	>80

SPACE LIGHT

LED light for the bed body with directed light and no-dots effect; 12V with external driver (included) in natural white or other light temperatures on request. It has a PIR sensor for turning it on by motion detection and auto-off timer. I's a compact lamp for installation by screws and clips; the continuous row and the length customization are not available.

Lampada a LED per scocca letto con luce direzionata ad effetto diffuso omogeneo; 12V con alimentatore esterno (incluso) e luce fissa natural white o altre temperature a richiesta. È dotata di sensore PIR per accensione tramite rilievo di movimento e timer per auto-spegnimento. Lampada compatta con installazione tramite clip; la fila continua e la personalizzazione in lunghezza non sono previste.

FINISHES AVAILABLE

91 - Brushed steel

SPECIFICATIONS

Surface mounted

Visible dot light

Cable length

Class III insulation

CE marking

NATURAL WHITE VERSIONS
(NW) KIT: 1x SPACE LIGHT + 1x POWER SUPPLY

	W	L mm	K	
13300229100	0,9	200	Natural White	n.a.

NATURAL WHITE VERSIONS
(NW) KIT: 2x SPACE LIGHT + 1x POWER SUPPLY

	W	L mm	K	
13300239100	0,9	200	Natural White	n.a.

TECHNICAL DRAWING

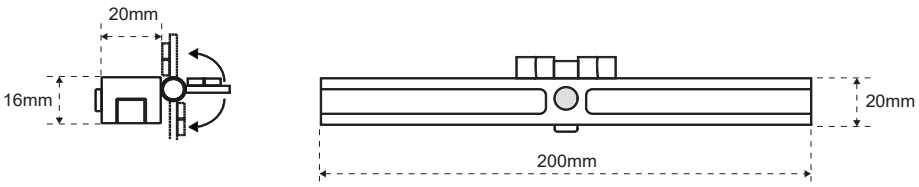

APPLICATIONS

Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	40	44	>80

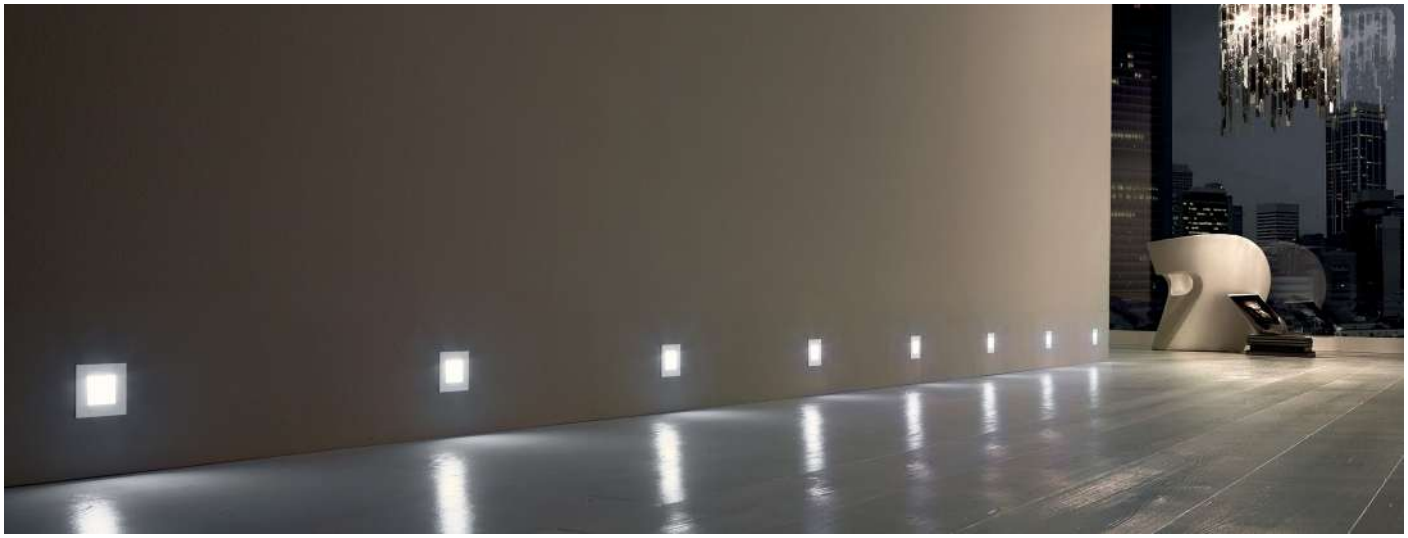

BASE

Plinth recessed LED light with directed light and no-dots effect; 12V in cold, warm white, or other temperatures on request. It has no sensors onboard. It's a compact lamp for installation by integrated clips; the continuous row and the length customization are not available.

Lampada LED ad incasso per zoccolo, con luce direzionata ad effetto diffuso omogeneo; 12V a luce fissa cold white, warm white, o altre temperature a richiesta. Non è dotata di sensori o interruttori. Lampada compatta per installazione tramite clip integrate; la fila continua e la personalizzazione in larghezza non sono disponibili.

FINISHES AVAILABLE

- 01 - White
- 09 - Chrome
- 65 - Metallic grey

COLD & WARM WHITE VERSIONS (CW & WW)

	W	mm	K	
1700001__00	0,4	68	Cold White	Yes
1700002__00	0,4	68	Warm White	Yes

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length ~2,5m
- Class III insulation
- CE marking

TECHNICAL DRAWING



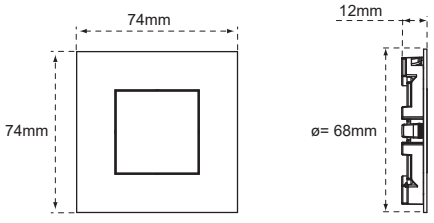

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
CW	10	25	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

BLUES

Undercabinet LED light with directed light and no-dots effect; 12V in warm or natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. Available with or without IRS infrared switch for on/off and EDC temperature changing. Compact lamp for easy installation by using screws; the continuous row can be created.

Lampada sottopensile a LED con luce direzionata ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white, altre temperature a richiesta, o Emotion Dual Color 3000-4000K. Disponibile con o senza sensore IRS ad infrarosso per accensione/spegnimento e cambio temperatura EDC. Compatta e di facile installazione tramite uso di viti; è possibile creare una fila continua.

FINISHES AVAILABLE

65 - Metallic grey

85 - Nickel

SPECIFICATIONS

Surface mounted

Uniform light

Cable length

Class III insulation

CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	L mm	K	
2330012__00ZD	1,8	95x105	3000-4000	n.a.
2330003__00ZD	1,8	95x105	3000-4000	Yes

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	L mm	K		
2330012__00ZW	1,8	95x105	Warm White	n.a.	
2330012__00ZN	1,8	95x105	Natural White	n.a.	
2330003__00ZW	1,8	95x105	Warm White	Yes	
2330003__00ZN	1,8	95x105	Natural White	Yes	

WARM & NATURAL WHITE VERSIONS (NW & WW) KIT N°1 BLUES IR + N°2 BLUES + POWER SUPPLY (220-240V~)

	W	L mm	K	
1241805__00ZW	1,8	95x105	Warm White	n.a.
1241805__00ZN	1,8	95x105	Natural White	n.a.

TECHNICAL DRAWING



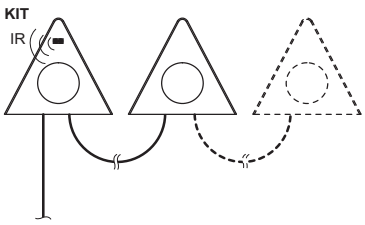

APPLICATIONS

Kitchen

ILLUMINANCE

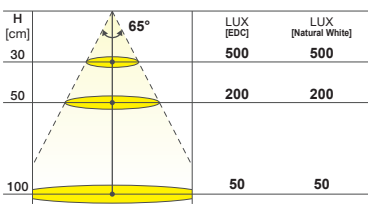

VERS.	LUMEN	Lm/W	CRI
EDC	90	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM Easy domotica

IR DC/DC Very low voltage controller

RADIO SWITCH Low voltage controller

SMART Find more on pag. 8

CONTROLLERS Find more on pag. 82

SUNRISE

Undercabinet recessed LED with no-dots effect; 12V in warm or natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. It has no sensors onboard. Compact lamp for installation by using the integrated clips. The continuous row is not avaialble.

Lampada LED sottopensile da incasso ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white, altre temperature a richiesta o Emotion Dual Color 3000-4000K. Non è dotata di sensori. Lampada compatta per installazione tramite clip integrate; non è prevista la fila continua.

FINISHES AVAILABLE

- 03 - Black
- 65 - Metallic grey
- 91 - Brushed steel

SPECIFICATIONS

- Semi - Recessed
- Surface mounted (with spacer)
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSIONS (EDC)

	W	mm	K	
2810001__00ZD	4,0	58	3000-4000	Yes

SPACER "58"

	Ø mm
2330009__00	64

	W	mm	K	
2810002__00ZD	4,0	68	3000-4000	Yes

SPACER "68"

	Ø mm
2810003__00	74

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	mm	K	
2810001__00ZW	4,0	58	Warm White	Yes
2810001__00ZN	4,0	58	Natural White	Yes

SPACER "58"

	Ø mm
2330009__00	64

	W	mm	K	
2810002__00ZW	4,0	68	Warm White	Yes
2810002__00ZN	4,0	68	Natural White	Yes

SPACER "68"

	Ø mm
2810003__00	74

TECHNICAL DRAWING

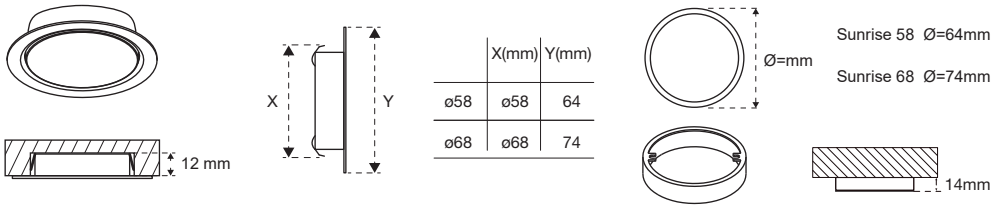

APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE

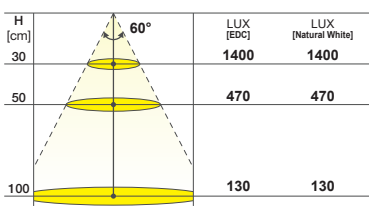

VERS.	LUMEN	Lm/W	CRI
EDC	332	84	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

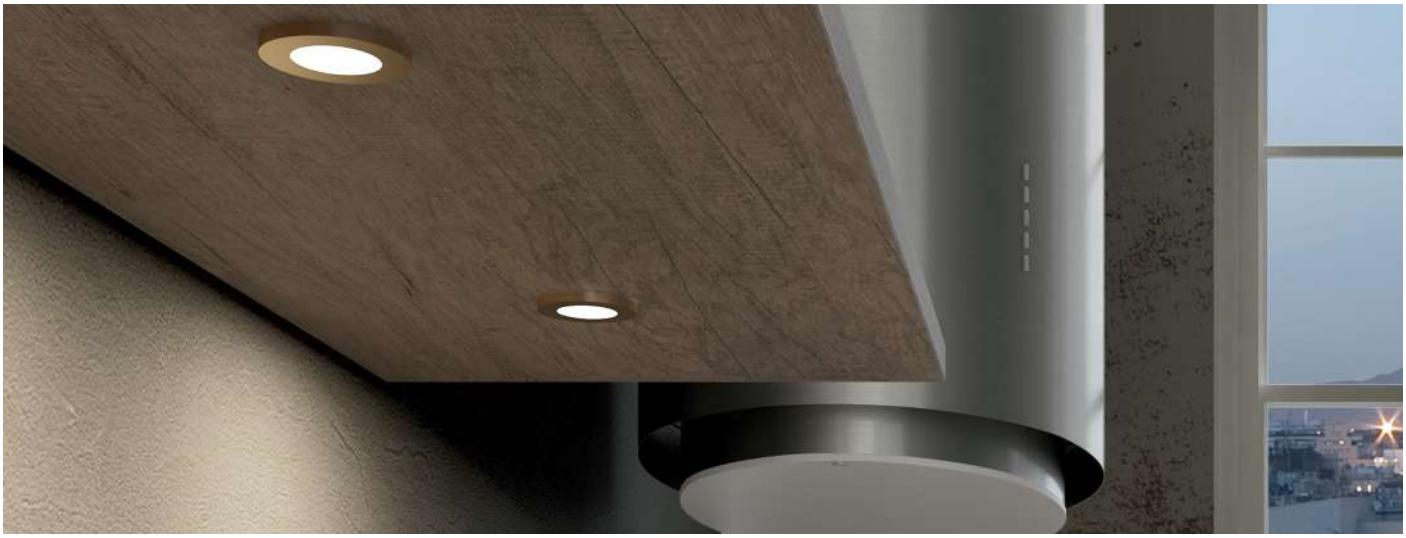

LUCKY -1

Undercabinet LED light with no-dots effect; 12V in warm or natural white or other light temperatures on request. It has no sensors onboard. It's a compact lamp, easy to install by using its magnetic clips. The continuous row cannot be created.

Lampada LED sottopensile con luce ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta e facile da installare tramite uso delle clip magnetiche in dotazione. Non è prevista la fila continua.

FINISHES AVAILABLE

- 65 - Metallic grey
- 85 - Nickel

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	Ø mm	K	
2790001__00ZW	1,7	50	Warm White	Yes
2790001__00ZN	1,7	50	Natural White	Yes

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2,5m
- Class III insulation
- CE marking

TECHNICAL DRAWING





APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	107	62	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

LUCKY -2

Undercabinet LED light with no-dots effect; 12V in warm or natural white or other light temperatures on request. It has no sensors onboard. It's a compact lamp, easy to install by using its magnetic clips. The continuous row cannot be created.

Lampada LED sottopensile con luce ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta e facile da installare tramite uso delle clip magnetiche in dotazione. Non è prevista la fila continua.

FINISHES AVAILABLE

65 - Metallic grey

85 - Nickel

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	L mm	K	
2790002__00ZW	2,0	50x50	Warm White	Yes
2790002__00ZN	2,0	50x50	Natural White	Yes

SPECIFICATIONS

Surface mounted

Uniform light

Cable length

Class III insulation

CE marking

TECHNICAL DRAWING

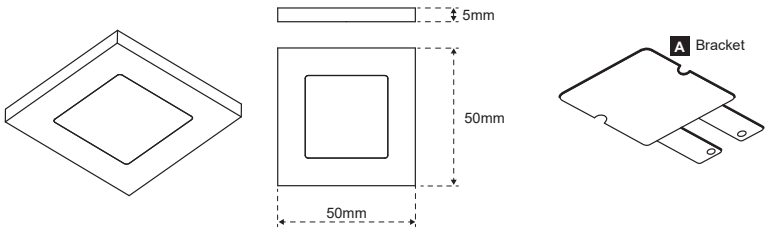

APPLICATIONS

Kitchen

Livingroom

Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	84	45	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

LUCKY -3

Undercabinet LED light with no-dots effect; 12V in warm or natural white or other light temperatures on request. It has no sensors onboard. It's a compact lamp, easy to install by using its magnetic clips. The continuous row cannot be created.

Lampada LED sottopensile con luce ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta e facile da installare tramite uso delle clip magnetiche in dotazione. Non è prevista la fila continua.

FINISHES AVAILABLE

- 65 - Metallic grey
- 85 - Nickel

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	L mm	K	
2790003__00ZW	2,7	150x50	Warm White	Yes
2790003__00ZN	2,7	150x50	Natural White	Yes

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2,5m
- Class III insulation
- CE marking

TECHNICAL DRAWING

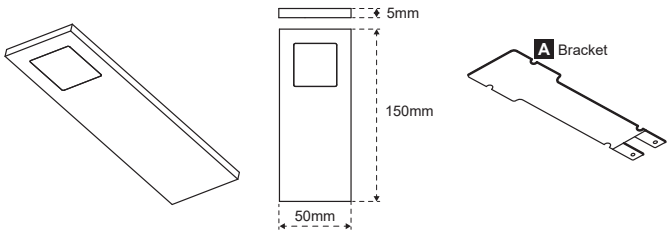

APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	119	42	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

LUCKY -4

Cabinet or library LED light with no-dots effect; 12V in warm or natural white or other light temperatures on request. It has no sensors onboard. It's a compact lamp, easy to install by using its magnetic clips. The continuous row cannot be created.

Lampada LED da armadio o libreria con luce ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta e facile da installare tramite uso delle clip magnetiche in dotazione. Non è prevista la fila continua.

FINISHES AVAILABLE

65 - Metallic grey

85 - Nickel

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	L mm	K	
2790004__00ZW	2,7	150x50	Warm White	Yes
2790004__00ZN	2,7	150x50	Natural White	Yes

SPECIFICATIONS

Surface mounted

Uniform light

Cable length

Class III insulation

CE marking

TECHNICAL DRAWING

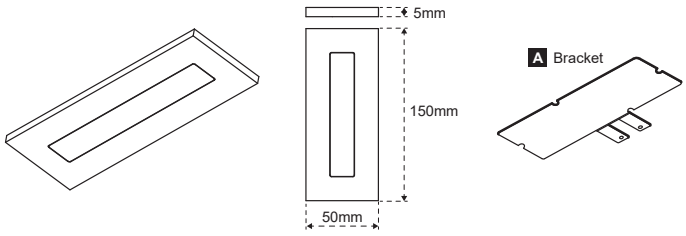

APPLICATIONS

Kitchen

Livingroom

Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	161	44	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

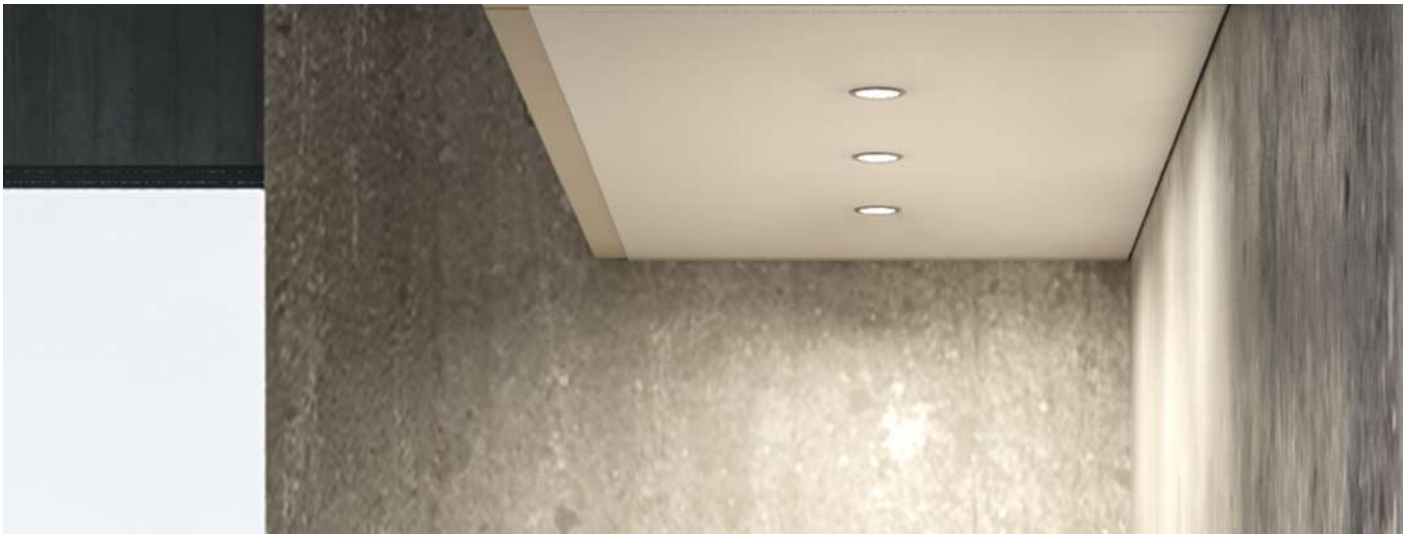

NUBE 35

Undercabinet recessed LED with no-dots effect; 12V in warm or natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. It has no sensors onboard. Compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED sottopensile da incasso ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white, altre temperature a richiesta o Emotion Dual Color 3000-4000K. Non è dotata di sensori. Lampada compatta per installazione tramite clip integrate. Non è prevista la fila continua.

FINISHES AVAILABLE

- 65 - Metallic grey
- 85 - Nickel

SPECIFICATIONS

- Semi - Recessed
- Surface mounted (with spacer)
- Uniform light
- Cable length
- Class III insulation
- CE marking

EMOTION DUAL COLOR VERSION (EDC)

	W	mm	K	
2330005__00ZD	1,8	35	3000-4000	Yes

SPACER

	Ø mm
2330008__00	40

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	mm	K	
2330005__00ZW	1,8	35	Warm White	Yes
2330005__00ZN	1,8	35	Natural White	Yes

WARM & NATURAL WHITE VERSIONS (NW & WW) KIT N°3 NUBE 35 + POWER SUPPLY (220-240V~)

	W	mm	K	
1241799__00ZW	5,4	35	Warm White	Yes
1241799__00ZN	5,4	35	Natural White	Yes

SPACER

	Ø mm
2330008__00	40

TECHNICAL DRAWING

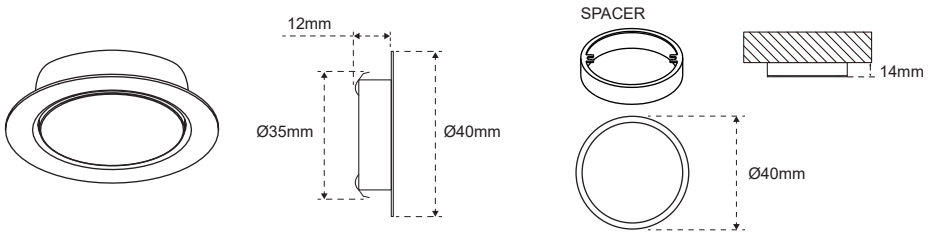

APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE

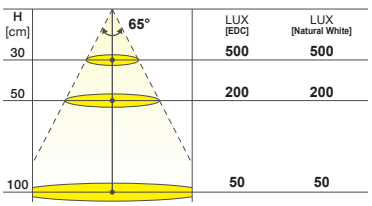

VERS.	LUMEN	Lm/W	CRI
EDC	90	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

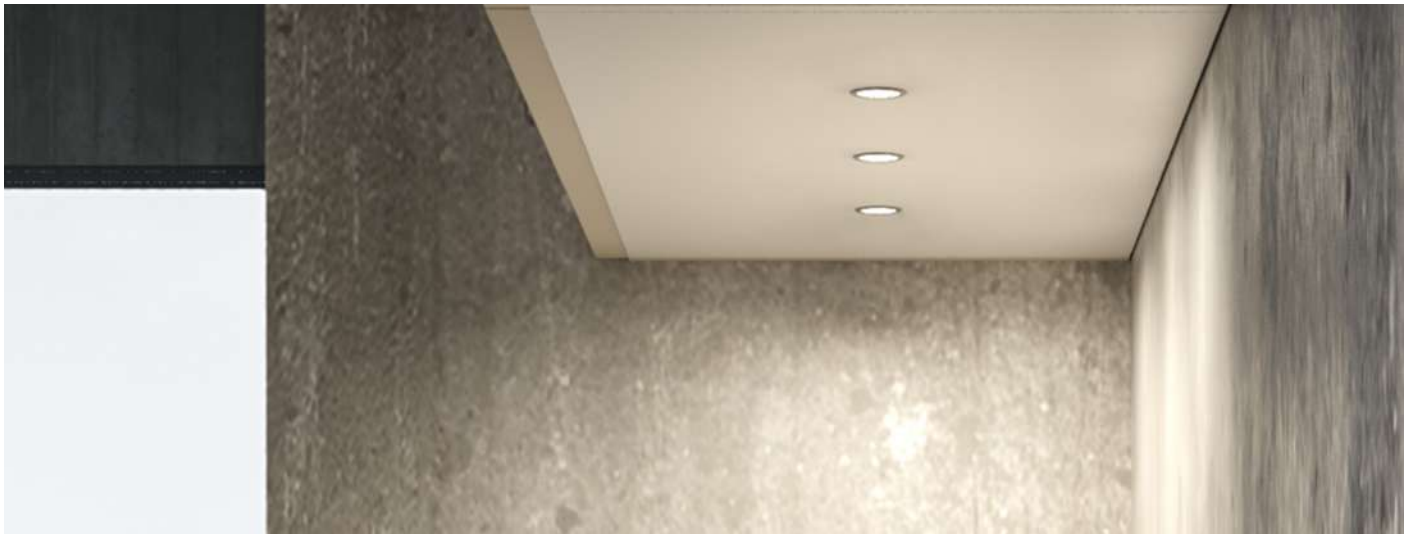

NUBE 58

Undercabinet recessed LED with no-dots effect; 12V in warm or natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. It has no sensors onboard. Compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED sottopensile da incasso ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white, altre temperature a richiesta o Emotion Dual Color 3000-4000K. Non è dotata di sensori. Lampada compatta per installazione tramite clip integrate. Non è prevista la fila continua.

FINISHES AVAILABLE

65 - Metallic grey

85 - Nickel

SPECIFICATIONS

Semi - Recessed

Surface mounted (with spacer)

Uniform light

Cable length

Class III insulation

CE marking

EMOTION DUAL COLOR VERSION (EDC)

	W	mm	K	
2330006__00ZD	2,5	58	3000-4000	Yes

SPACER

	Ø mm
2330009__00	64

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	mm	K	
2330006__00ZW	2,5	58	Warm White	Yes
2330006__00ZN	2,5	58	Natural White	Yes

WARM & NATURAL WHITE VERSIONS (NW & WW) KIT N°3 NUBE 58 + POWER SUPPLY (220-240V~)

	W	mm	K	
1241801__00ZW	7,5	58	Warm White	Yes
1241801__00ZN	7,5	58	Natural White	Yes

SPACER

	Ø mm
2330009__00	64

TECHNICAL DRAWING

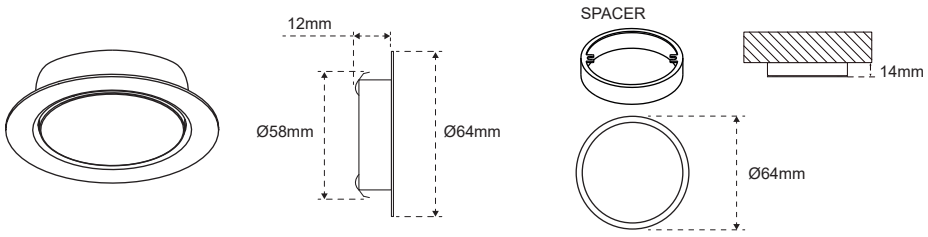

APPLICATIONS

Kitchen

Livingroom

Shop

ILLUMINANCE

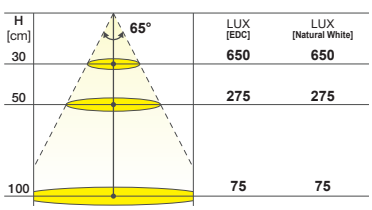

VERS.	LUMEN	Lm/W	CRI
EDC	160	64	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

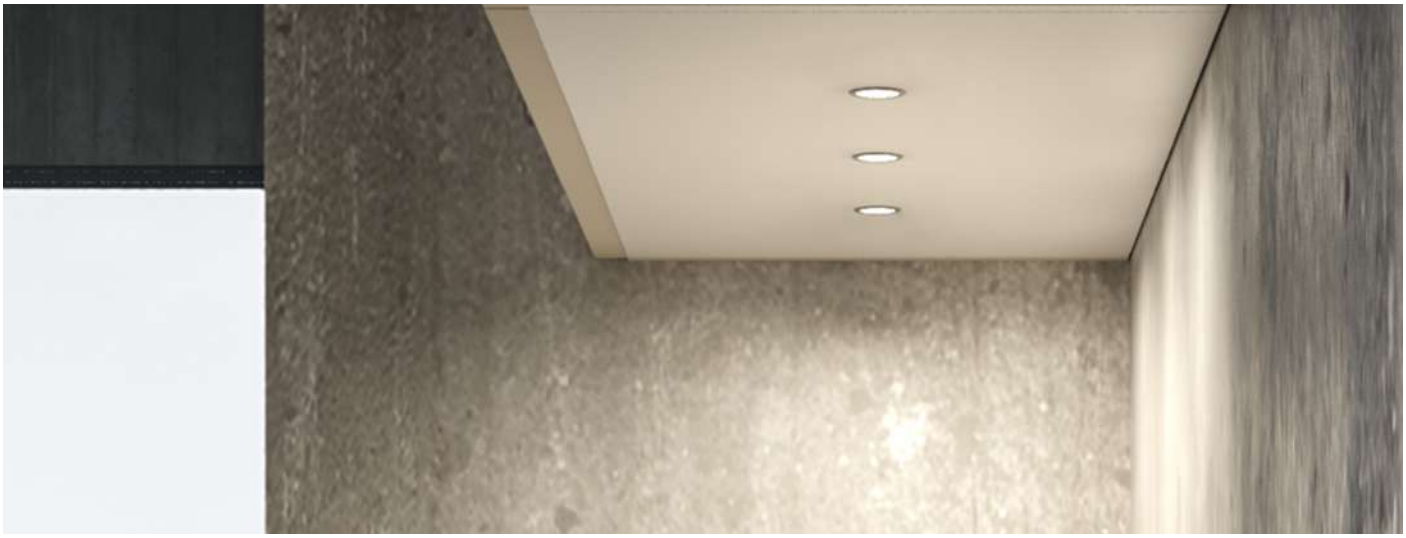

NUBE 68

Undercabinet recessed LED with no-dots effect; 12V in warm or natural white, other temperatures on request, or Emotion Dual Color 3000-4000K. It has no sensors onboard. Compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED sottopensile da incasso ad effetto diffuso omogeneo; 12V a luce fissa warm o natural white, altre temperature a richiesta o Emotion Dual Color 3000-4000K. Non è dotata di sensori. Lampada compatta per installazione tramite clip integrate. Non è prevista la fila continua.

FINISHES AVAILABLE

- 65 - Metallic grey
- 85 - Nickel

SPECIFICATIONS

- Semi - Recessed
- Surface mounted (with spacer)
- Uniform light
- Cable length
- Class III insulation
- CE marking

APPLICATIONS

- Kitchen
- Livingroom
- Shop

EMOTION DUAL COLOR VERSION (EDC)

	W	mm	K	
2330007__00ZD	3,0	68	3000-4000	Yes

SPACER

Ø mm
74

2330010__00

WARM & NATURAL WHITE VERSIONS (WW & NW)

	W	mm	K	
2330007__00ZW	3,0	68	Warm White	Yes
2330007__00ZN	3,0	68	Natural White	Yes

WARM & NATURAL WHITE VERSIONS (NW & WW) KIT N°3 NUBE 58 + POWER SUPPLY (220-240V~)

	W	mm	K	
1241803__00ZW	9,0	68	Warm White	Yes
1241803__00ZN	9,0	68	Natural White	Yes

SPACER

Ø mm
74

2330010__00

TECHNICAL DRAWING

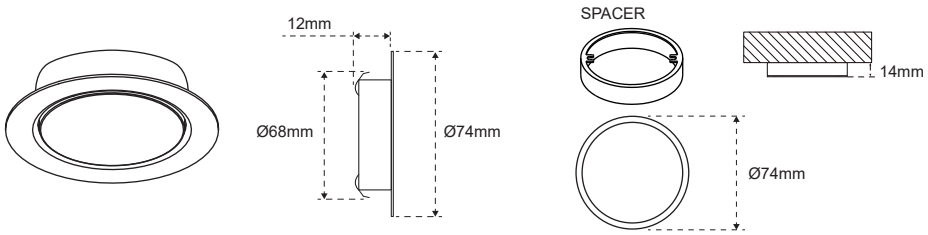

ILLUMINANCE

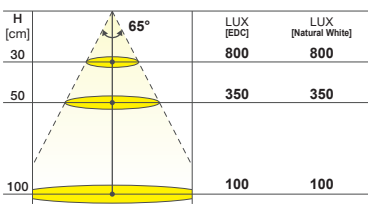

VERS.	LUMEN	Lm/W	CRI
EDC	195	65	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

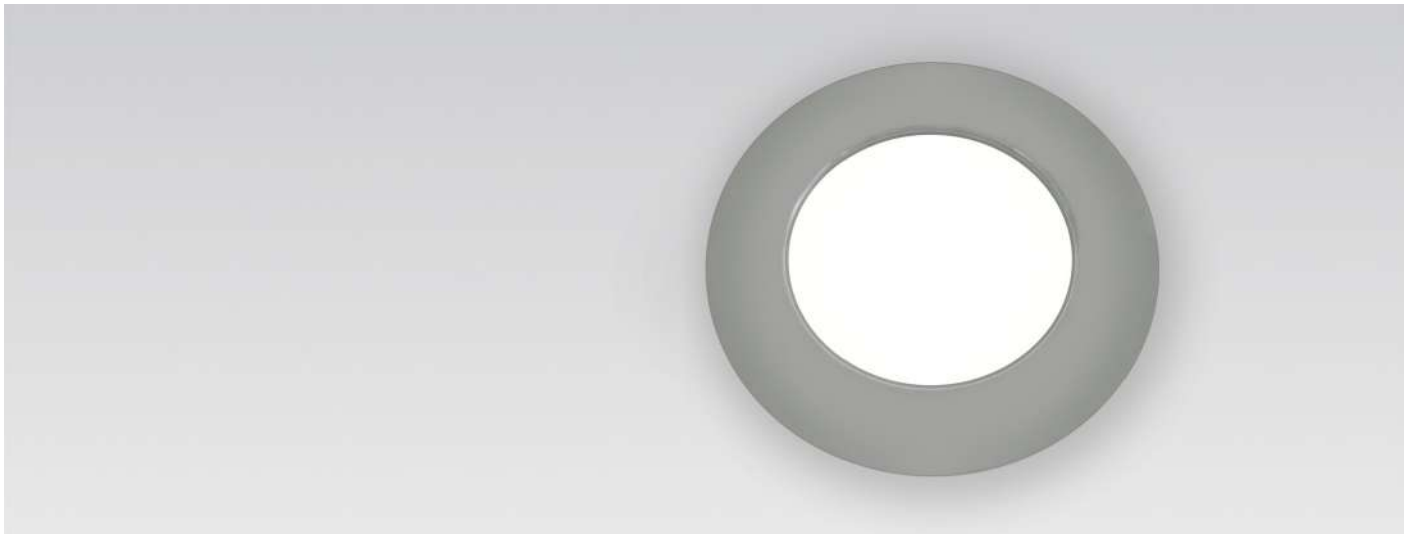

NUBE 230

Undercabinet recessed LED with no-dots effect; 230V in warm or natural white, other temperatures on request. It has no sensors onboard. Compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED sottopensile da incasso ad effetto diffuso omogeneo; 230V a luce fissa warm o natural white, altre temperature a richiesta. Non è dotata di sensori. Lampada compatta per installazione tramite clip integrate. Non è prevista la fila continua.

FINISHES AVAILABLE

- 01 - White
- 65 - Metallic grey

SPECIFICATIONS

- Semi - Recessed
- Surface mounted (with spacer)
- Uniform light
- Cable length
- Class II insulation
- CE marking

APPLICATIONS

- Kitchen
- Livingroom
- Shop

WARM & NATURAL WHITE VERSIONS (NW)

	W	mm	K
2330015__00ZW	2,6	58	Warm White
2330015__00ZN	2,6	58	Natural White

SPACER

	Ø mm
2330017__00	64

DISTRIBUTOR

12605120100

TECHNICAL DRAWING







ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	200	77	>80

MATRIX

Undercabinet LED point light; 12V in warm or natural white and other temperatures on request. It has no sensors onboard. Compact and easy to install by using screws. The continuous row cannot be created.

Lampada LED sottopensile ad effetto puntiforme; 12V a luce fissa warm o natural white e altre temperature a richiesta. Non è dotata di sensori. Compatta e di facile installazione tramite viti; la fila continua non è prevista.

FINISHES AVAILABLE

65 - Metallic grey

91 - Brushed steel

SPECIFICATIONS

Surface mounted

Visible dot light

Cable length

Class III insulation

CE marking

WARM & COLD WHITE VERSIONS (WW & CW)

	W	L mm	K	
12807610000ZW	2,0	64x64	Warm White	Yes
12807610000ZC	2,0	64x64	Cold White	Yes

WARM & COLD WHITE VERSIONS (WW & CW) KIT N°3 MATRIX + POWER SUPPLY (220-240V~)

	W	L mm	K	
1241825__00ZW	2,0	64x64	Warm White	Yes
1241825__00ZC	2,0	64x64	Cold White	Yes

TECHNICAL DRAWING





APPLICATIONS

Kitchen

Livingroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	140	70	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

MATRIX.IN

Undercabinet recessed LED point light; 12V in warm or natural white and other temperatures on request. It has no sensors onboard. Compact and easy to install by using screws. The continuous row cannot be created.

Lampada LED sottopensile da incasso ad effetto puntiforme; 12V a luce fissa warm o natural white e altre temperature a richiesta. Non è dotata di sensori. Compatta e di facile installazione tramite viti; la fila continua non è prevista.

FINISHES AVAILABLE

- 01 - White
- 65 - Metallic grey
- 91 - Brushed steel

SPECIFICATIONS

- Semi - Recessed
- Visible dot light
- Cable length
- Class III insulation
- CE marking

WARM & COLD WHITE VERSIONS (WW & CW)

	W	mm	K	
1820007__00ZW	2,0	72	Warm White	Yes
1820007__00ZC	2,0	72	Cold White	Yes

WARM & COLD WHITE VERSIONS (WW & CW) KIT N°3 MATRIX.IN + POWER SUPPLY (220-240V~)

	W	mm	K	
1241827__00ZW	2,0	72	Warm White	Yes
1241827__00ZC	2,0	72	Cold White	Yes

TECHNICAL DRAWING

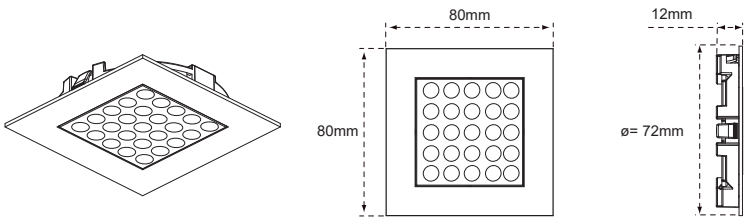

APPLICATIONS

- Kitchen
- Livingroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	140	70	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

SHAPING S

Under/inside cabinet, wardrobe LED light with no-dots effect; 12V in natural white or other temperatures on request. It has no sensors onboard. Compact and easy to install by using screws.

Lampada LED sotto/interno pensile o armadio, con luce ad effetto diffuso omogeneo; 12V in luce fissa natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta di facile installazione tramite uso di viti.

FINISHES AVAILABLE

- 01 - White
- 03 - Black

NATURAL WHITE VERSION (NW)

	W	L mm	K	
2820004__00ZN	3,0	100x100	Natural White	Yes

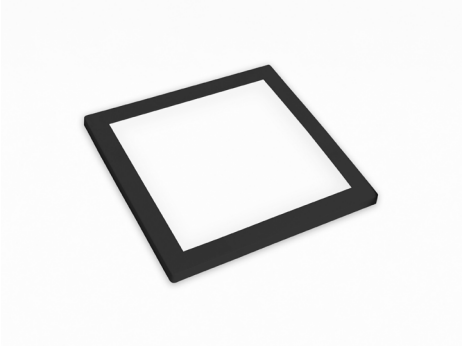

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2m
- Class III insulation
- CE marking

TECHNICAL DRAWING

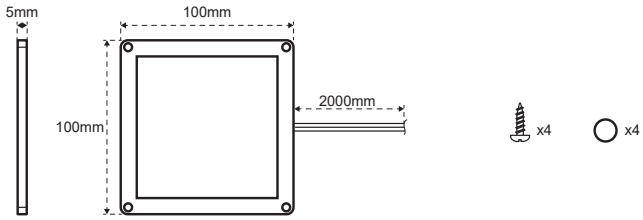

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	150	50	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

SHAPING R

Under/inside cabinet, wardrobe LED light with no-dots effect; 12V in natural white or other temperatures on request. It has no sensors onboard. Compact and easy to install by using screws.

Lampada LED sotto/interno pensile o armadio, con luce ad effetto diffuso omogeneo; 12V in luce fissa natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta di facile installazione tramite uso di viti.

FINISHES AVAILABLE

- 01 - White
- 03 - Black

NATURAL WHITE VERSION (NW)

	W	L mm	K	
2820002__00ZN	6,0	200x100	Natural White	Yes

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2m
- Class III insulation
- CE marking

TECHNICAL DRAWING

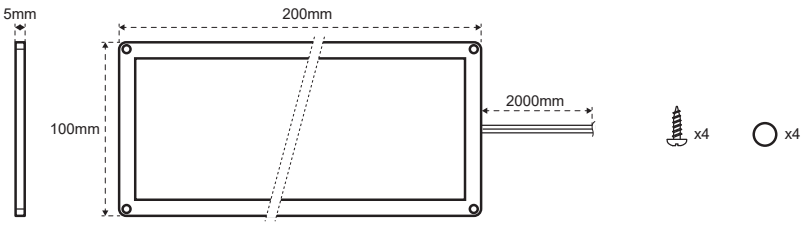

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	348	58	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

SHAPING R2

Under/inside cabinet, wardrobe LED light with no-dots effect; 12V in natural white or other temperatures on request. It has no sensors onboard. Compact and easy to install by using screws.

Lampada LED sotto/interno pensile o armadio, con luce ad effetto diffuso omogeneo; 12V in luce fissa natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta di facile installazione tramite uso di viti.

FINISHES AVAILABLE

- 01 - White
- 03 - Black

NATURAL WHITE VERSION (NW)

	W	L mm	K	
2820003__00ZN	9,0	300x100	Natural White	Yes

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2m
- Class III insulation
- CE marking

TECHNICAL DRAWING

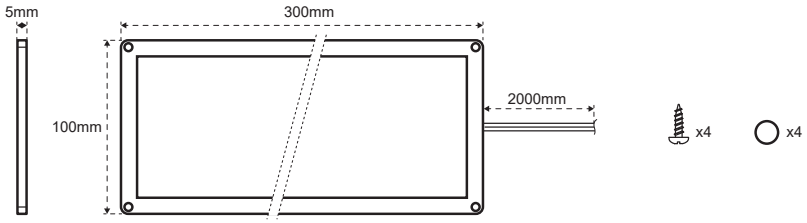

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	522	58	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

SHAPING C

Under/inside cabinet, wardrobe LED light with no-dots effect; 12V in natural white or other temperatures on request. It has no sensors onboard. Compact and easy to install by using screws.

Lampada LED sotto/interno pensile o armadio, con luce ad effetto diffuso omogeneo; 12V in luce fissa natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta di facile installazione tramite uso di viti.

FINISHES AVAILABLE

- 01 - White
- 03 - Black

NATURAL WHITE VERSION (NW)

	W	L mm	K	
2820001__00ZN	7,0	200x200	Natural White	Yes

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length ~2m
- Class III insulation
- CE marking

TECHNICAL DRAWING

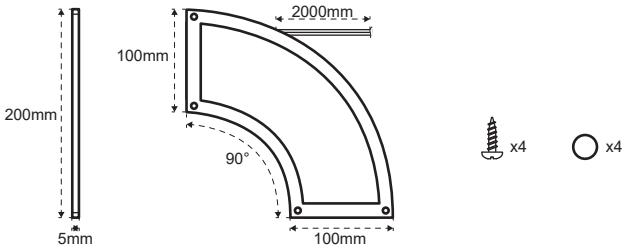

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	490	70	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

HAWAII

Inside cabinet or glass showcase recessed LED light with no-dots effect; 350mA in warm or natural white or other temperatures on request. It has no sensors onboard. It's a compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED ad incasso per interno pensili o vetrine te, con luce ad effetto diffuso omogeneo; 350mA a luce fissa warm o natural white o altre temperature a richiesta. Non è dotata di sensori. Compatta, si installa tramite uso delle clip integrate; non è prevista la fila continua.

FINISHES AVAILABLE

- 01 - White
- 65 - Metallic grey

WARM & COLD WHITE VERSIONS (WW & CW) Lens 30°

	W	mm	K
2160002__01	1,2	25	Warm White
2160005__01	1,2	25	Cold White

SPECIFICATIONS

- Semi - Recessed
- Surface mounted (with spacer)
- Visible dot light
- Cable length ~2m
- Class III insulation
- CE marking

TECHNICAL DRAWING





APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
CW	80	65	>80

POWER SUPPLIES

CODE		a mm	b mm	c mm	P(W)
12503010101	6	68	35	21	max. 6
12503020101	9	110	45	20	max. 12

LIGHT POINT

Inside cabinet or glass showcase recessed LED lamp with directed light and no-dots effect; 350mA in warm or natural white and other light temperatures on request. It has no sensors onboard. It's a compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED ad incasso per interno pensili o vetrinette, con luce direzionabile ad effetto diffuso omogeneo; 350mA a luce fissa warm o natural white e altre temperature a richiesta. Non è dotata di sensori. Compatta, si installa tramite uso delle clip integrate; non è prevista la fila continua.

FINISHES AVAILABLE

03 - Black

65 - Metallic grey

WARM & COLD WHITE VERSIONS (WW & CW)

	W	mm	K
1680002__03ZW	1,0	34	Warm White
1680002__03ZC	1,0	34	Cold White

SPECIFICATIONS

- Semi - Recessed
- Visible dot light
- Cable length
- Class III insulation
- CE marking

TECHNICAL DRAWING

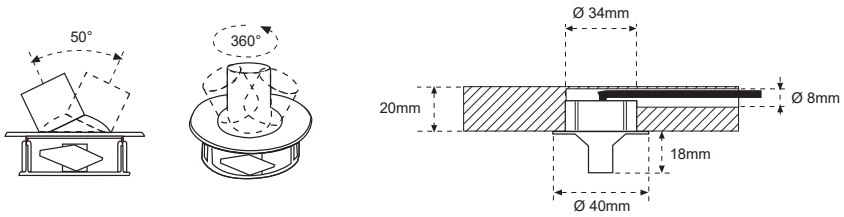

APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
CW	95	95	>80

POWER SUPPLIES

CODE		a mm	b mm	c mm	P(W)
12503010101	6	68	35	21	max. 6
12503020101	9	110	45	20	max. 12

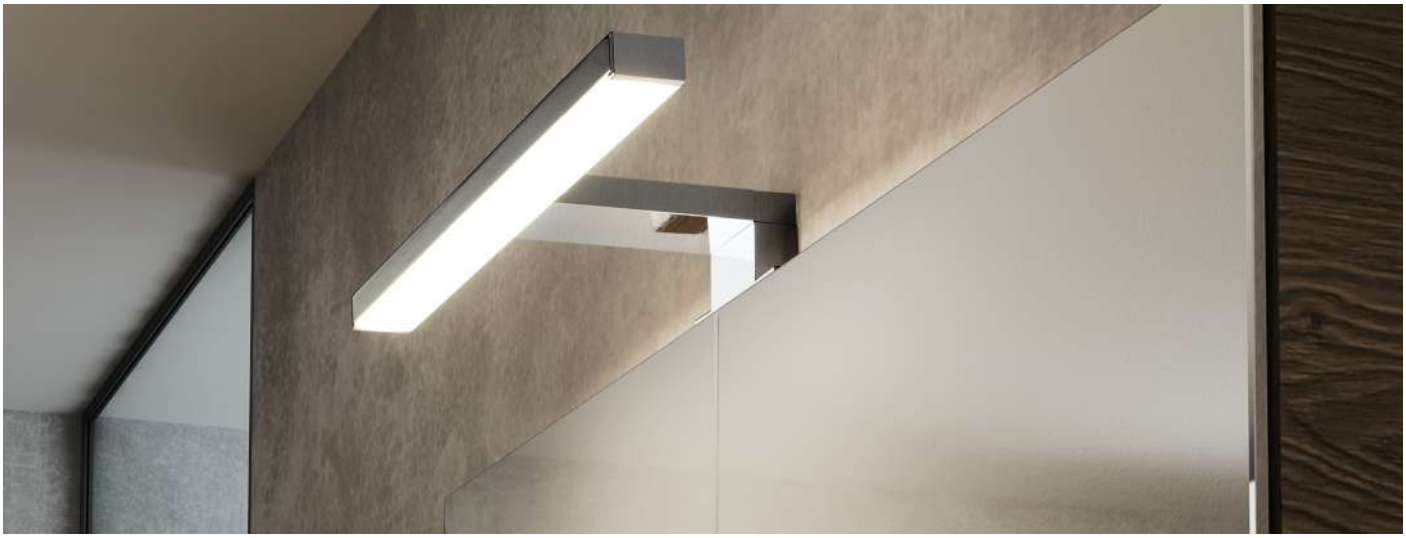

IRIS

Mirror LED light with no-dots effect; 230V with integrated driver in natural white or other temperatures on request. It has no sensors onboard. It's an IP44 compact lamp for installation by using screws.

Lampada LED per specchiera con luce ad effetto diffuso omogeneo; 230V con alimentatore integrato e luce fissa natural white o altre temperature a richiesta. Non. È dotata di sensori. È una lampada IP44 compatta, installabile tramite uso di viti.

FINISHES AVAILABLE

09 - Chrome

NATURAL WHITE VERSION (NW)

	W	L mm	K
17900450901	5,5	300	Natural White

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class II insulation
- CE marking

TECHNICAL DRAWING

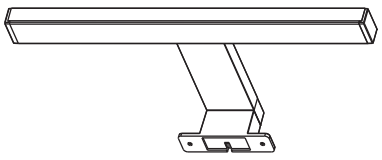

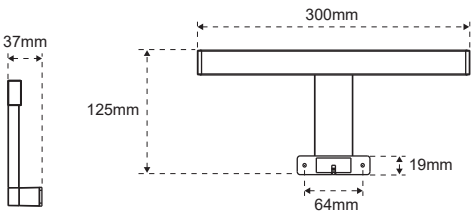

APPLICATIONS

Bathroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	275	50	>80

LILIUM

Mirror LED light with no-dots effect; 230V with integrated driver in natural white or other temperatures on request. It has no sensors onboard. It's an IP44 compact lamp for installation by using screws.

Lampada LED per specchiera con luce ad effetto diffuso omogeneo; 230V con alimentatore integrato e luce fissa natural white o altre temperature a richiesta. Non. È dotata di sensori. È una lampada IP44 compatta, installabile tramite uso di viti.

FINISHES AVAILABLE

09 - Chrome

NATURAL WHITE VERSION (NW)

	W	L mm	K
17900460901	7,0	500	Natural White

SPECIFICATIONS

- Surface mounted
- Uniform light
- Cable length
- Class II insulation
- CE marking

TECHNICAL DRAWING

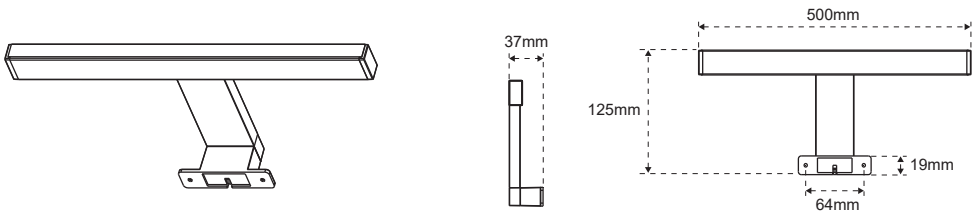

APPLICATIONS

Bathroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	350	50	>80

GEM-A

Ceiling recessed LED light with no-dots effect; 230V with integrated driver in natural white or other light temperatures on request. It has no sensors onboard. It's a compact lamp for installation by using the integrated clips. The continuous row cannot be created.

Lampada LED ad incasso da controsoffitto con luce ad effetto diffuso omogeneo; 230V con alimentatore integrato e luce fissa natural white o altre temperature a richiesta. Non è dotata di sensori. È una lampada compatta, installabile tramite clip integrate; la fila continua non è prevista.

FINISHES AVAILABLE

01 - White

NATURAL WHITE VERSION (NW)

	W	mm	K	
26400010100ZN	9,5	107	Natural White	n.a.

SPECIFICATIONS

- Semi - Recessed
- Uniform light
- Cable length
- Class II insulation
- CE marking

TECHNICAL DRAWING

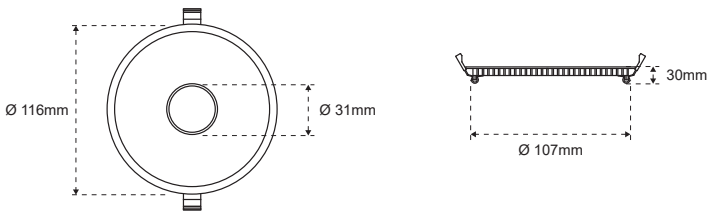

APPLICATIONS

- Kitchen
- Livingroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	800	84	>80

RECHARGEABLE & BATTERY

SMART

Wardrobe LED light with no-dots effect; lithium battery powered in natural white or other light temperatures on request. It's equipped with a PIR sensor for on/off by motion detection. Compact lamp for easy installation by using magnetic clips.

Lampada LED da armadio con luce ad effetto diffuso omogeneo; alimentata con batteria al litio, in luce fissa natural white o altre temperature a richiesta. È dotata di sensore PIR per accensione/spegnimento al rilievo di movimento. Compatta di facile installazione tramite uso di clip magnetiche.

FINISHES AVAILABLE

- 01 - White
- 03 - Black
- 65 - Metallic grey

NATURAL WHITE VERSION (NW)

	W	L mm	K	VDC
2690001__00ZN	0,85	118x67	Natural White	5

SPECIFICATIONS

- Surface mounted
- Uniform light
- Class III insulation
- CE marking

TECHNICAL DRAWING

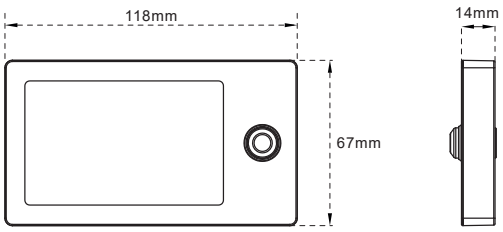

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	51	60	>80

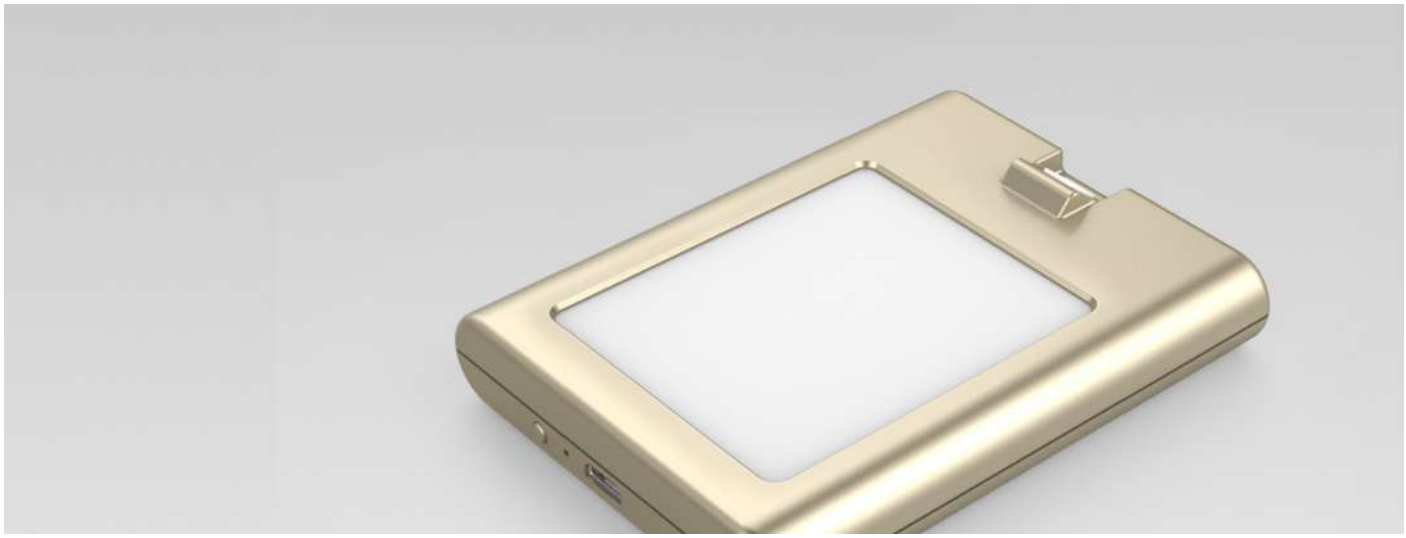

SMART MINI

Wardrobe LED light with no-dots effect; lithium battery powered in natural white or other light temperatures on request. It's equipped with a PIR sensor for on/off by motion detection. Compact lamp for easy installation by using magnetic clips.

Lampada LED da armadio con luce ad effetto diffuso omogeneo; alimentata con batteria al litio, in luce fissa natural white o altre temperature a richiesta. È dotata di sensore PIR per accensione/spegnimento al rilievo di movimento. Compatta di facile installazione tramite uso di clip magnetiche.

FINISHES AVAILABLE

- 01 - White
- 03 - Black
- 08 - Gold

NATURAL WHITE VERSION (NW)

	Sensor	W	L mm	K	VDC
2690002__00ZN		0,4	88x67	Natural White	5

SPECIFICATIONS

- Surface mounted
- Uniform light
- Class III insulation
- CE marking

TECHNICAL DRAWING

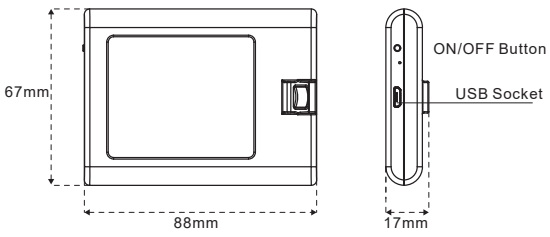

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	24	60	>80

SMART PLUS

Wardrobe LED light with no-dots effect; lithium battery powered in natural white or other light temperatures on request. It's equipped with a PIR sensor for on/off by motion detection. Compact lamp for easy installation by using magnetic clips. It has a USB port.

Lampada LED da armadio con luce ad effetto diffuso omogeneo; alimentata con batteria al litio, a luce fissa natural white o altre temperature a richiesta. È dotata di sensore PIR per accensione/spegnimento al rilievo di movimento e di uscita USB. Compatta di facile installazione tramite uso di clip magnetiche.

FINISHES AVAILABLE

- 01 - White
- 03 - Black
- 08 - Gold
- 65 - Metallic grey

SPECIFICATIONS

- Surface mounted
- Uniform light
- Class III insulation
- CE marking

NATURAL WHITE VERSION (NW)

	W	L mm	K	VDC
2690003__00ZN	1,4	88x67	Natural White	5

TECHNICAL DRAWING

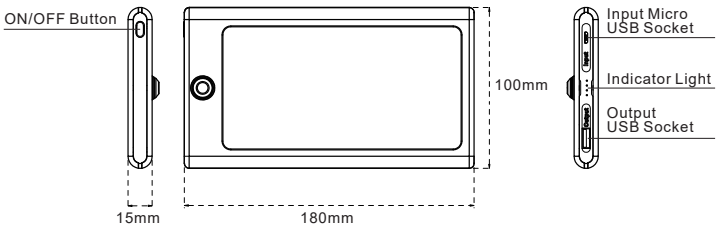

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
NW	130	93	>80

STILO

Drawer LED light with no-dots effect; AAA battery powered in cold white or other light temperatures on request. It's equipped with a PIR sensors for on/off by motion detection. Compact lamp for easy installation by using magnetic clips.

Lampada LED per cassettone o con luce ad effetto diffuso omogeneo; alimentata con batterie stilo AAA, a luce fissa cold white o altre temperature a richiesta. È dotata di sensore PIR per accensione/spegnimento al rilievo di movimento. Compatta di facile installazione tramite uso di clip magnetiche.

FINISHES AVAILABLE

12 - Aluminum

COLD WHITE VERSION (NW)

	W	L mm	K	VDC
18900021200	0,6	303	Cold White	5

SPECIFICATIONS

- Surface mounted
- Visible dot light
- Class III insulation
- CE marking

TECHNICAL DRAWING

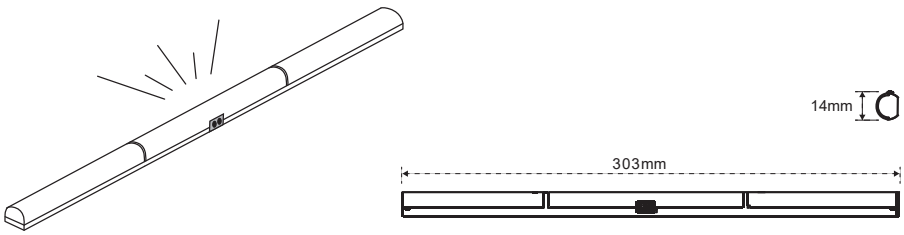

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
CW	40	65	>80

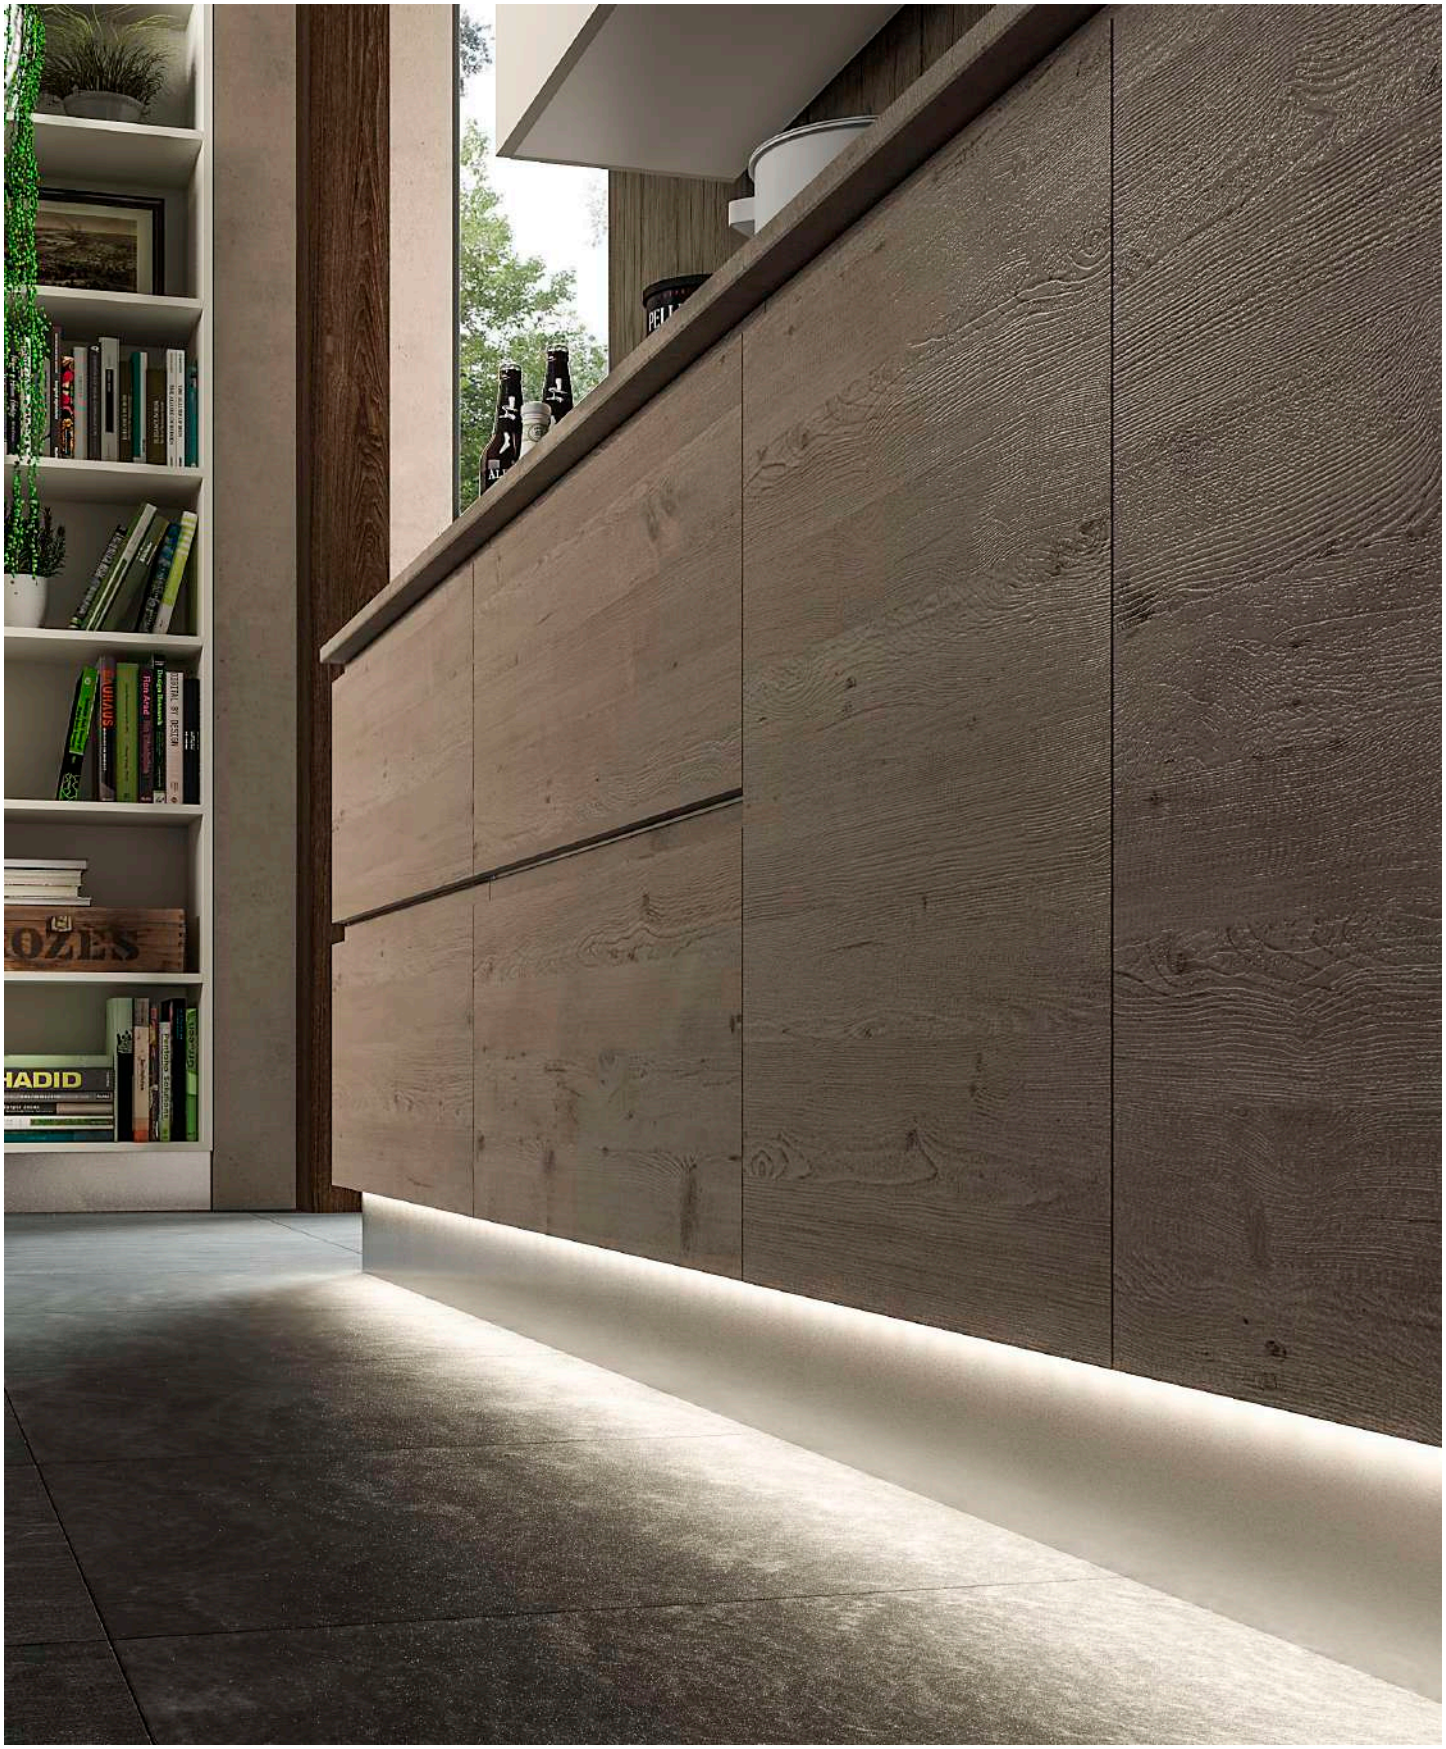

STRIP REEL

STRIP REEL 12V

Stripreel with LED light; 12V in warm, cold or natural white. The continuous row can be created and it can be customized in length by cut.

Reel LED, 12V a luce fissa, warm, cold o natural white. La fila continua è prevista, ed è personalizzabile in lunghezza tramite taglio.

FINISHES AVAILABLE

00 - Transparent

SPECIFICATIONS

- Surface mounted
- Uniform light
- Class III insulation
- CE marking
- Can be cut

WARM, NATURAL & COLD WHITE VERSIONS (WW, NW, CW)

"G"	W	L mm	K	
12807400000GW	7,8/m	5m	Warm White	72L/m
12807400000GN	7,8/m	5m	Natural White	72L/m
12807400000GC	7,8/m	5m	Cold White	72L/m

"C"	W	L mm	K	
12807410000CW	11,7/m	5m	Warm White	108L/m
12807410000CN	11,7/m	5m	Natural White	108L/m
12807410000CC	11,7/m	5m	Cold White	108L/m

"E"	W	L mm	K	
12807420000EW	16,9/m	5m	Warm White	156L/m
12807420000EN	16,9/m	5m	Natural White	156L/m
12807420000EC	16,9/m	5m	Cold White	156L/m

CONNECTION CORD + SPRING

	L mm
12603960000	3m

EXTENSION CORD + SPRING

	L mm
12603930000	100
12603940000	400
12603950000	700

TECHNICAL DRAWING

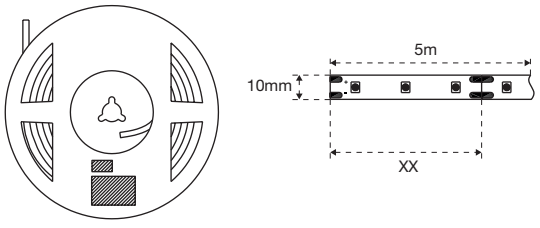

STRIP REEL "G" 72 Led/m 12VDC
XX = 42mm DAISY CHAIN = 4,6m MAX

STRIP REEL "C" 108 Led/m 12VDC
XX = 27,8mm DAISY CHAIN = 3,1m MAX

STRIP REEL "E" 156 Led/m 12VDC
XX = 19,2mm DAISY CHAIN = 2,1m MAX

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

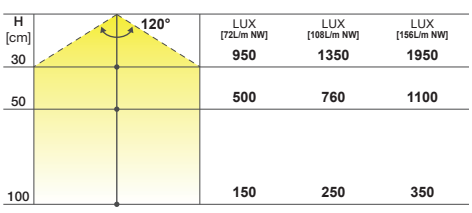

VERS.	LUMEN	Lm/W	CRI
1m NW 108L/m	982	84	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

STRIP REEL 24V

Stripreel with LED light; 24V in warm, cold or natural white. The continuous row can be created and it can be customized in length by cut.

Reel LED, 24V a luce fissa, warm, cold o natural white. La fila continua è prevista, ed è personalizzabile in lunghezza tramite taglio.

FINISHES AVAILABLE

00 - Transparent

SPECIFICATIONS

- Surface mounted
- Uniform light
- Class III insulation
- CE marking
- Can be cut

WARM, NATURAL & COLD WHITE VERSIONS (WW, NW, CW)

"N"	W	L mm	K	
12808190000NW	7,8/m	5m	Warm White	72L/m
12808190000NN	7,8/m	5m	Natural White	72L/m
12808190000NC	7,8/m	5m	Cold White	72L/m

"M"	W	L mm	K	
12808180000MW	11,7/m	5m	Warm White	108L/m
12808180000MN	11,7/m	5m	Natural White	108L/m
12808180000MC	11,7/m	5m	Cold White	108L/m

"I"	W	L mm	K	
12807430000IW	16,9/m	5m	Warm White	156L/m
12807430000IN	16,9/m	5m	Natural White	156L/m
12807430000IC	16,9/m	5m	Cold White	156L/m

CONNECTION CORD + SPRING

	L mm
12603920000	3m

EXTENSION CORD + SPRING

	L mm
12603930000	100
12603940000	400
12603950000	700

TECHNICAL DRAWING

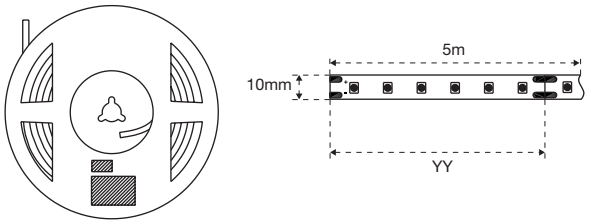

STRIP REEL "N" 72 Led/m 24VDC
YY = 84mm DAISY CHAIN = 9,2m MAX

STRIP REEL "M" 108 Led/m 24VDC
YY = 55,6mm DAISY CHAIN = 6,2m MAX

STRIP REEL "I" 156 Led/m 24VDC
YY = 38,5mm DAISY CHAIN = 4,3m MAX

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE

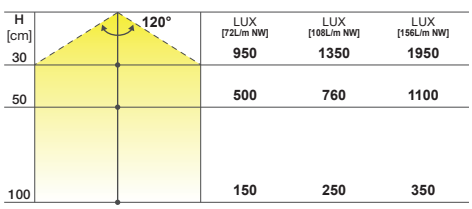

VERS.	LUMEN	Lm/W	CRI
1m NW 108L/m	982	84	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507760001	max. 15	0,625
12505500002	max. 45	1,875

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

STRIP REEL 12V sheathed

Sheathed stripreel with light; 12V in warm white. The continuous row can be created and it can be customized in length by cut.

Reel inguainata a LED; 12V a luce fissa warm white. La fila continua è prevista, ed è personalizzabile in lunghezza tramite taglio.

FINISHES AVAILABLE

00 - Transparent

SPECIFICATIONS

- Surface mounted
- Uniform light
- Class III insulation
- CE marking
- Can be cut

WARM WHITE VERSION (WW)

	"G"	W	L mm	K	
12809620000GW		7,8/m	2m	Warm White	72L/m
12809630000GW		7,8/m	3m	Warm White	72L/m

CONNECTION CORD + SPRING

	L mm
12603960000	3m

FIXING KIT + N°2 ENDCAPS

	VERS.
12417810001	N°25 clips and screw + n°2 endcaps

TECHNICAL DRAWING



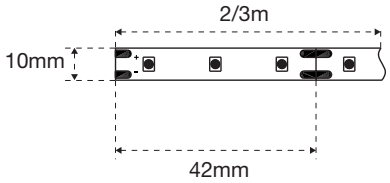

APPLICATIONS

- Kitchen
- Livingroom
- Bedroom
- Shop

ILLUMINANCE



VERS.	LUMEN	Lm/W	CRI
1m WW	655	84	>80

POWER SUPPLIES & EXTENSION CORD

CODE	P (W)	I (A)
12507730001	max. 15	1,25
12505460003	max. 45	3,75

Complete range at the end of the catalogue

CONTROLLERS (only for version without integrated controller)

SMART SYSTEM
Easy domotica

IR DC/DC
Very low voltage controller

RADIO SWITCH
Low voltage controller

SMART
Find more on pag. 8

CONTROLLERS
Find more on pag. 82

CONTROLLERS & ACCESSORIES

RADIO SWITCH

Remote control battery operated for on/off up to 10m distance with 230V receiver.

Radiocomando a batteria per accensione e spegnimento fino a 10mt di distanza. Ricevente a 230V.

FINISHES AVAILABLE

65 - Metallic grey

SPECIFICATIONS

Class II insulation

CE marking

RECEIVER + REMOTE CONTROL (A)

	W	I(A)	Hz
12404770101	550	16 MAX	50-60

REMOTE CONTROL (B)

12404786501

TECHNICAL DRAWING

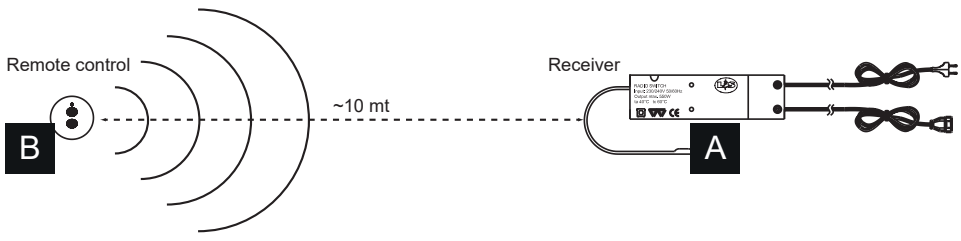

APPLICATIONS

Kitchen

Livingroom

Bedroom

Shop

IR DC/DC (SURFACE MOUNTED & RECESSED)

12VDC 24VDC

External infrared sensor for on/off function, available in 12V or 24V version for surface mounted or recessed installation.

Sensore esterno ad infrarosso per accension/spegnimento, disponibile in versione 12V o 24V, per installazione sporgente o ad incasso.

FINISHES AVAILABLE

65 - Metallic grey

SPECIFICATIONS

Class III insulation

CE marking

IR DC/DC SURFACE MOUNTED (12VDC)

	VERS.	W	I(A)
12808146500	1 IR	max. 36	3 MAX
12808166500	2 IR	max. 36	3 MAX

IR DC/DC RECESSED (12VDC)

	VERS.	W	I(A)
12807816500	1 IR	max. 36	3 MAX
12807826500	2 IR	max. 36	3 MAX

IR DC/DC SURFACE MOUNTED (24VDC)

	VERS.	W	I(A)
12808156500	1 IR	max. 60	2,5 MAX
12808176500	2 IR	max. 60	2,5 MAX

IR DC/DC RECESSED (24VDC)

	VERS.	W	I(A)
12808266500	1 IR	max. 60	2,5 MAX
12808276500	2 IR	max. 60	2,5 MAX

TECHNICAL DRAWING

SURFACE MOUNTED

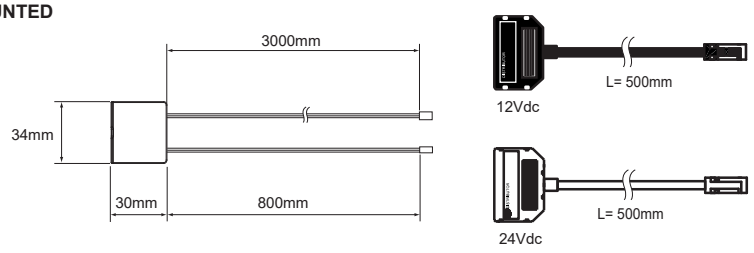

APPLICATIONS

Kitchen

Livingroom

Bedroom

Shop

TECHNICAL DRAWING

RECESSED

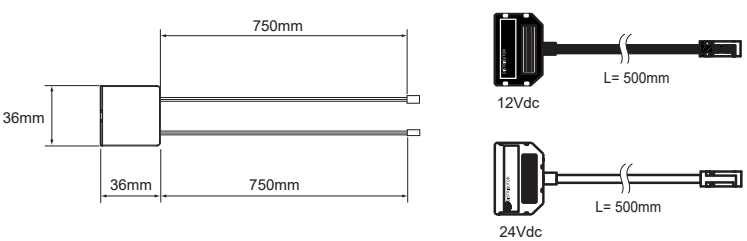

TOKI

Power sockets tower with integrated Bluetooth loudspeaker, 2 Schuko and 1 USB port. Adjustable height (540/590mm).

Torretta dotata di 2 prese Schuko, 1 USB e sistema audio integrato con Bluetooth per connessione a dispositivi mobili, L'altezza è regolabile (540/590mm).

FINISHES AVAILABLE

91 - Brushed steel

RECEIVER + REMOTE CONTROL (A)

	Hz
24600019100	50-60

SPECIFICATIONS

- Cable length
- Class I insulation
- CE marking
- Speaker
- Bluetooth
- USB port

TECHNICAL DRAWING

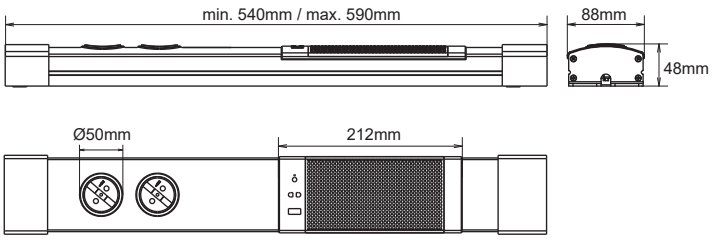

APPLICATIONS

Kitchen

MECCANO &
MECCANO SLIDING

DO IT YOURSELF

Meccano is the L&S system that allows you to create **customized LED luminaires** by choosing the linear profile that best suits your needs. Meccano consists of several individual parts, profiles, screens, LED reels, controllers and power supplies, allowing you to build a completely customized luminaire that is **easy to assemble**. This is possible due to a special connector, developed by the laboratories of research and development of L&S, which integrates seamlessly with the LED reels, **avoiding any kind of welding**, and thus making it possible to recover the entire reel.

The Meccano strengths:

1. the **flexibility** allows you the possibility to create your own custom linear lighting system with a clean aesthetic and smal footprint
2. the **reduction of delivery times**, have a very fast turn around since the finished product can be made at the exact time when you create the need for having to install it, also causing a **reduction in costs**
3. the ability to **change your mind**. In fact, thanks to the elements created with an interlocking logic, it is always possible to remove the finished product and assemble it with other components

Meccano è il sistema di L&S che permette di creare in modo autonomo apparecchi d'illuminazione a LED, scegliendo il profilo lineare più adatto alle proprie esigenze. Meccano è costituito da diversi componenti sfusi, profili, schermi, bobine LED, controller e alimentatori, grazie ai quali è possibile realizzare un apparecchio illuminante completamente personalizzato e di facile assemblaggio. Questo è possibile grazie allo speciale connettore, ideato dai laboratori di Ricerca&Sviluppo di L&S, che si integra perfettamente con le bobine LED, **evitando qualsiasi tipo di saldatura,**e che permette così di recuperare tutta la bobina.

I punti di forza del sistema Meccano:

1. la **flessibilità**, grazie alla possibilità offerta di creare il proprio sistema di illuminazione personalizzato, con un'estetica lineare e pulita ed ingombri contenuti
2. la **riduzione dei tempi di consegna,** che diventano molto rapidi in quanto il prodotto finito può essere realizzato nel momento esatto in cui si crea la necessità di doverlo installare, determinando anche una riduzione dei costi
3. inoltre, a prodotto finito, sarà anche **possibile sostituire alcuni componenti** per variare la temperatura colore,l'intensità della luce, il tipo di schermo, controller o alimentatore. Il tutto senza doversi affidare all'elettricista o a professionisti

Choose the profile and the accessories

STEP 1

Meccano & Meccano Sliding

Pag. 88-89

Choose the light engine

STEP 2

Meccano & Meccano Sliding

Pag. 90

Quick assembly, controller and power supplies

STEP 3

Meccano

Pag. 91-92

Meccano Sliding

Pag. 93-97

APPLICATIONS APPLICAZIONI

SURFACE-MOMUNTED SPORGENTE

MEC-1

RECESSED INCASSO

MEC-2 MEC-4

ORIENTED INCLINATA

MEC-3 MEC-5

STEP 1 CHOOSE THE PROFILE SCEGLI IL PROFILO

ALUMINIUM PROFILE FOR SURFACE MOUNTED AND RECESSED APPLICATION

MEC-1 MEC-2

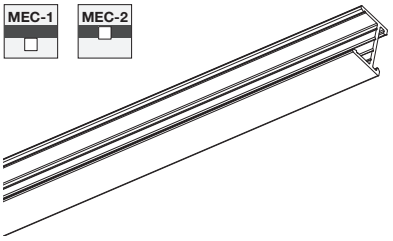



Drill Dimension MEC-2



03 Available now in black finishing

12 Aluminum finishing

CODE	L mm	
1980028__00	3m	5

ALUMINIUM PROFILE FOR ORIENTED APPLICATION

MEC-3

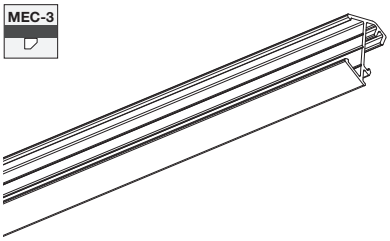



03 Available now in black finishing

12 Aluminum finishing

CODE	L mm	
1980029__00	3m	5

ALUMINIUM PROFILE FOR RECESSED APPLICATION

MEC-4

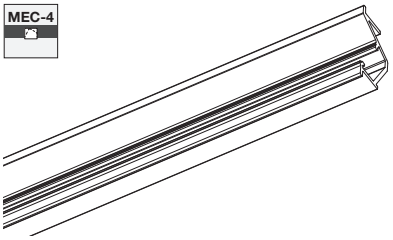



Drill Dimension MEC-4



03 Available now in black finishing

12 Aluminum finishing

CODE	L mm	
1980048__00	3m	5

ALUMINIUM PROFILE FOR ORIENTED APPLICATION

MEC-5

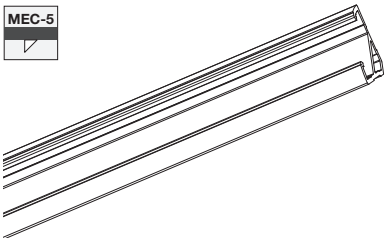



03 Available now in black finishing

12 Aluminum finishing

CODE	L mm	
1980049__00	3m	5

COVER

MEC-1 MEC-3 MEC-4 MEC-5



CODE	VERS.	L mm	
19700120000	transparent	3m	5
19700120100	opal		

COVER

MEC-2



CODE	VERS.	L mm	
19700130000	transparent	3m	5
19700130100	opal		

STEP 1 END-CAPS & FIXING SYSTEM TESTATE E FISSAGGI

ENDINGS



MEC-1

03 Available now in black finishing

00 Metallic grey finishing

CODE
1320108__00

KIT HOLDERS



MEC-2

CODE
13201100000

ENDINGS



MEC-3

03 Available now in black finishing

00 Metallic grey finishing

CODE
1320109__00

KIT BRACKET

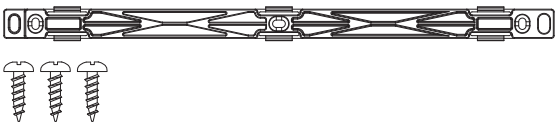

MEC-1 MEC-3

CODE
13201110000

ENDINGS AND KIT HOLDERS

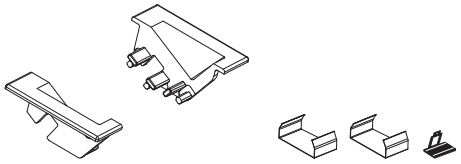

MEC-4

03 Available now in black finishing

00 Metallic grey finishing

CODE
1320128__00

ENDINGS

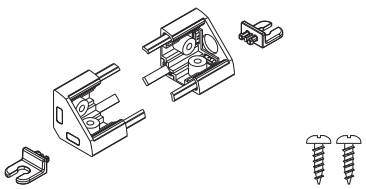

MEC-5

03 Available now in black finishing

00 Metallic grey finishing

CODE
1320129__00

BRIDGE CONNECTOR

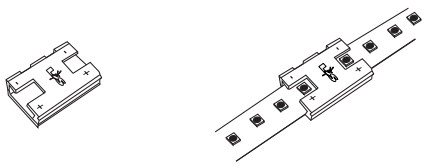

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

CODE
19700450100

STEP 2 CHOOSE THE STRIP REEL SCEGLI IL TIPO DI REEL

STRIP REEL

12Vdc

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

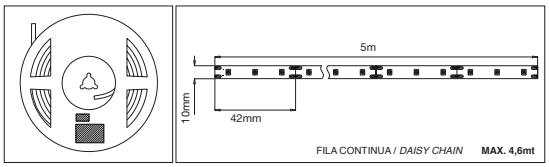

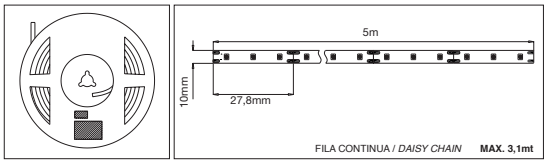

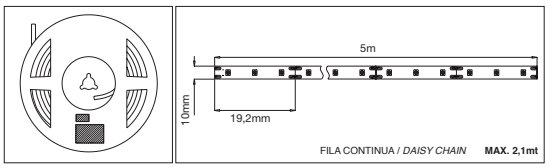

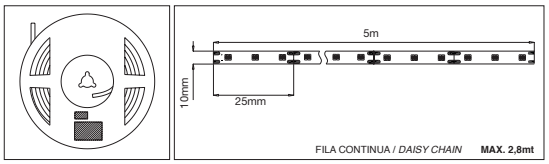

CODE	VDC	K		W	L mm
12807400000GW	12	Warm White	72Led/m	7,8W/m	5m
12807400000GN		Natural White			
12807400000GC		Cold White			
12807410000CW	12	Warm White	108Led/m	11,7W/m	5m
12807410000CN		Natural White			
12807410000CC		Cold White			
12807420000EW	12	Warm White	156Led/m	16,9W/m	5m
12807420000EN		Natural White			
12807420000EC		Cold White			

Emotion Strip Reel available only for Meccano (not for Sliding version)

12808490001AGD	12	3000 ÷ 4000	120+120Led/m	13,0W/m	5m

STRIP REEL

24Vdc

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

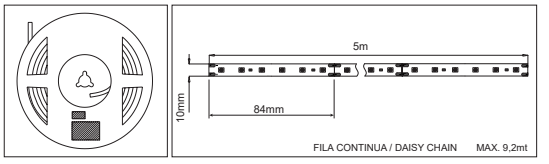

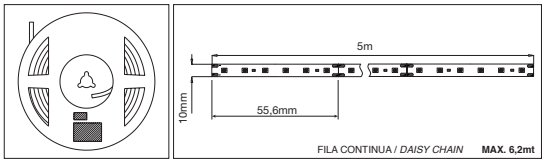

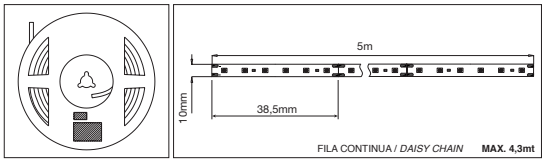

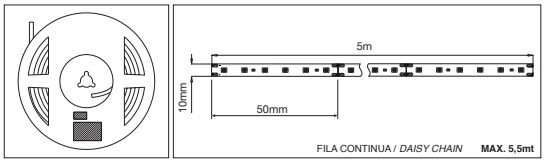

CODE	VDC	K		W	L mm
12808190000NW	24	Warm White	72Led/m	7,8W/m	5m
12808190000NN		Natural White			
12808190000NC		Cold White			
12808180000MW	24	Warm White	108Led/m	11,7W/m	5m
12808180000MN		Natural White			
12808180000MC		Cold White			
12807430000IW	24	Warm White	156Led/m	16,9W/m	5m
12807430000IN		Natural White			
12807430000IC		Cold White			

Emotion Strip Reel available only for Meccano (not for Sliding version)

12808860001AHD	24	3000 ÷ 4000	120+120Led/m	13,0W/m	5m

STEP
3

MECCANO

QUICK ASSEMBLY

STEP 3 CONNECTIONS & CONTROLLERS

CONNECTION CORD

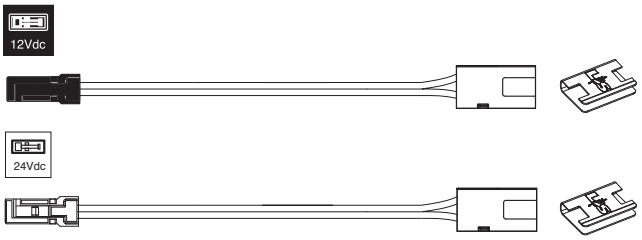

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

CODE	VDC	L mm
12603960000	12	3m
12603920000	24	3m

EXTENSION CORD



MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

CODE	VDC	L mm
12603930000	12 - 24	0,1m
12603940000		0,4m
12603950000		0,7m

CONTROLLER

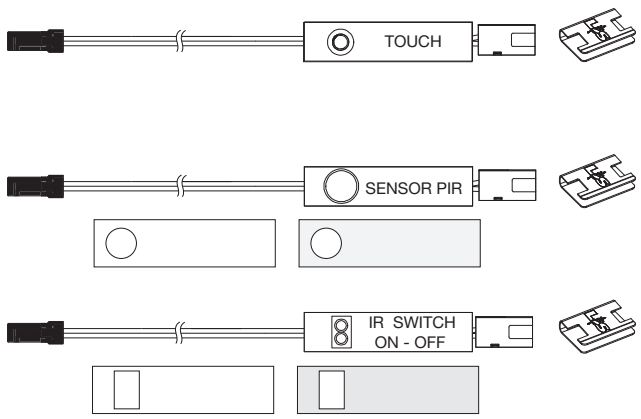

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

CODE	VDC	VERS.	L mm
12807510001	12/24	Touch MEC-1, MEC-2, MEC-3, MEC-4, MC-5	3m
12807530001	12/24	Sensor PIR MEC-1, MEC-3, MEC-4, MC-5	3m
12807570001	12/24	Sensor PIR MEC-2	3m
12807550001	12/24	IR Switch MEC-1, MEC-3, MEC-4, MC-5	3m
12807580001	12/24	IR Switch MEC-2	3m

INCLUDED



VERS.	L mm
"12 to 24 Jumper" to convert the controller from 12Vdc to 24Vdc	50

CONTROLLER MEC EMOTION DUAL COLOR

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5



CODE	VDC	VERS.	L mm
12808870000	12/24	IR Switch MEC-1, MEC-3, MEC-4, MC-5	3m
12808880000	12/24	IR Switch MEC-2	3m

INCLUDED



VERS.	L mm
"12 to 24 Jumper" to convert the controller from 12Vdc to 24Vdc	50



CODE	VDC	VERS.	L mm
12605010000	12	"Emotion Jumper" to convert the color temperature from 3000K to 4000K (for lamp without controller)	50
12605020000	24		

NOTE: ALL THE POWER SUPPLIES AVAILABLE FOR MECCANO SYSTEM, ARE IN THE ADDITIONAL COVER AT THE END OF THE CATALOGUE **PER ALIMENTATORI VEDI FINE CATALOGO**

STEP
3

MECCANO SLIDING

QUICK ASSEMBLY

CONNECTION SCHEME

CONNECTION SCHEME FOR MECCANO SLIDING

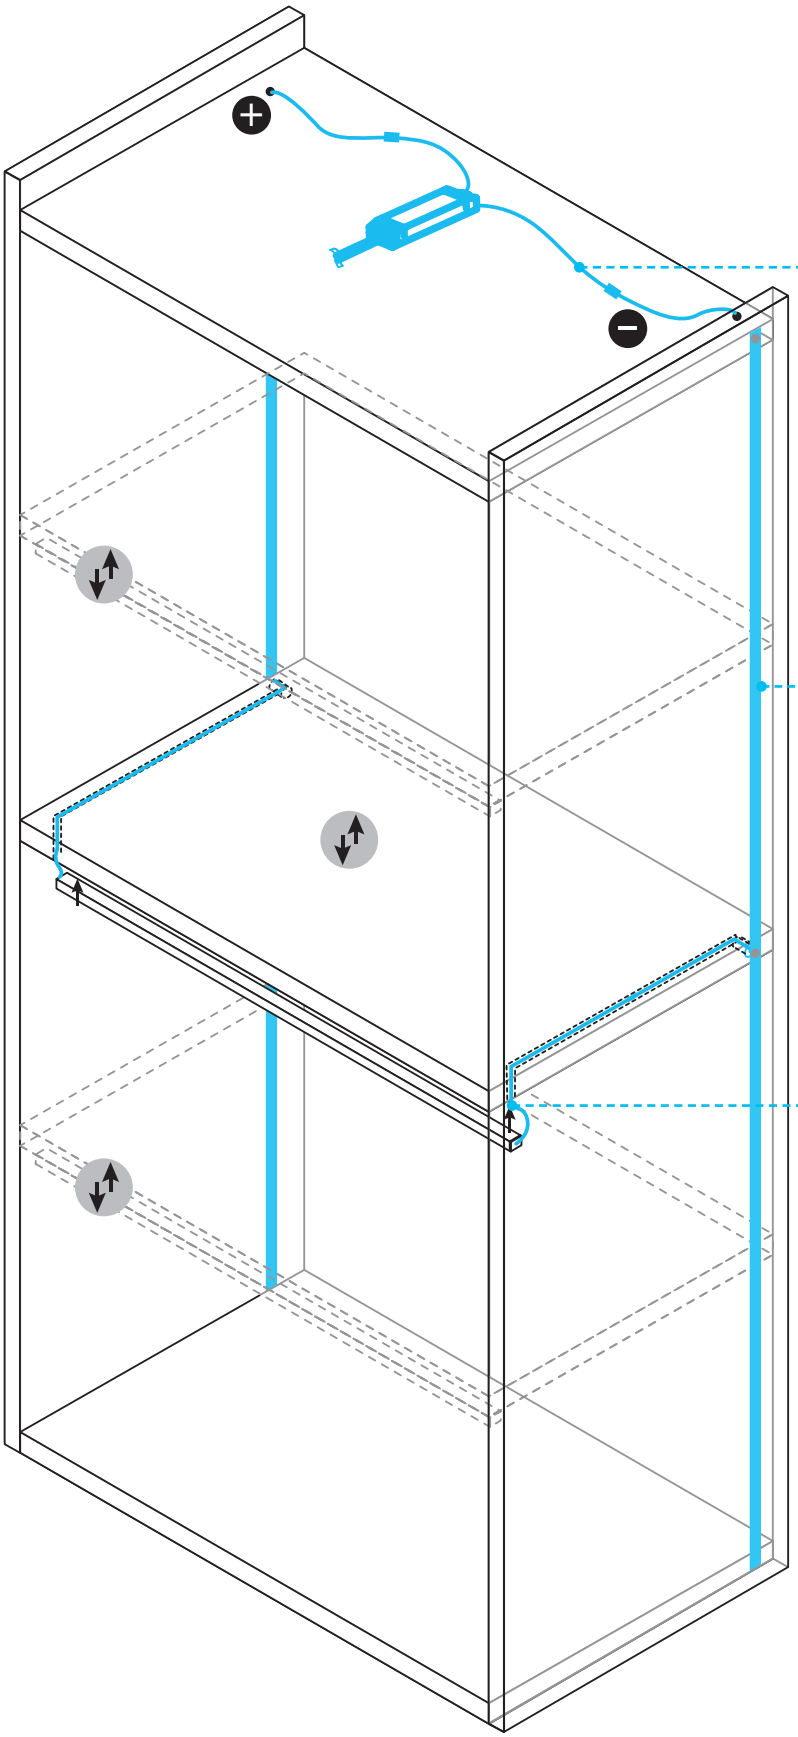

3 POWER SUPPLY AND RAIL CONNECTOR

2 ELECTRIFIED RAIL

1 KIT LAMP AND SHELF CONNECTION

DURING THE MOUNTING OPERATIONS PAY ATTENTION TO THE WIRING POLARITY

1 LAMP & SHELF SCHEME

LAMP CONNECTION FOR MECCANO SLIDING

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

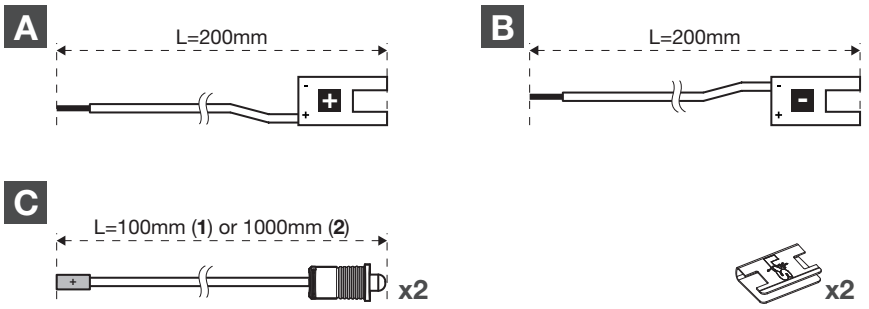

CODE	L mm
12421060000	300mm (AB+C1)
12421070000	1200mm (AB+C2)

A B LAMP CONNECTOR INSTALLATION (+ / -)

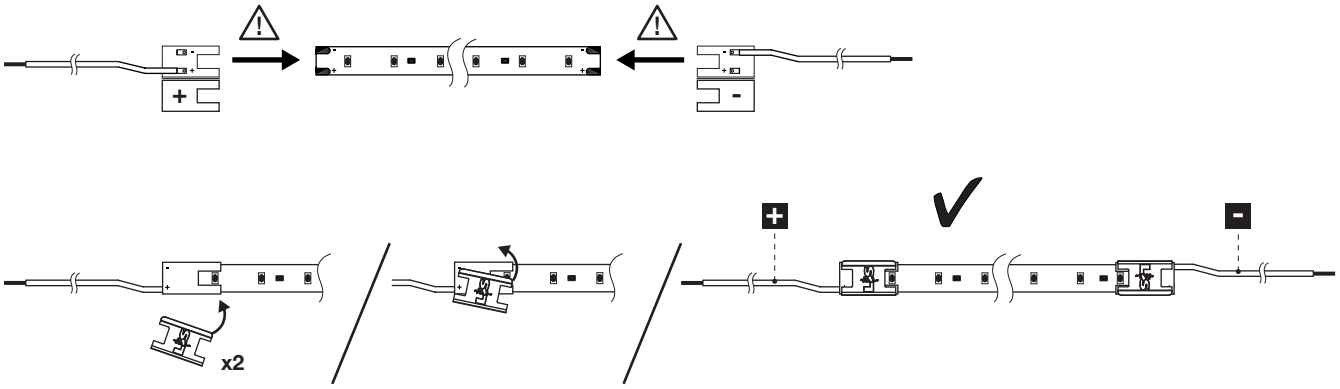

C SHELF CONNECTOR INSTALLATION (+ / -)

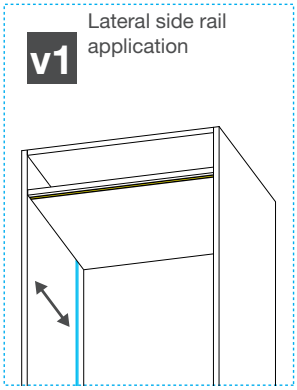

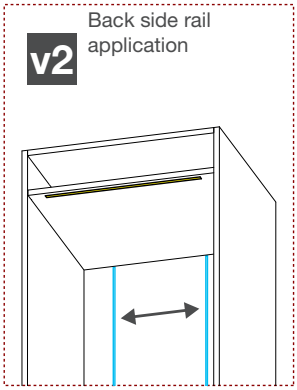

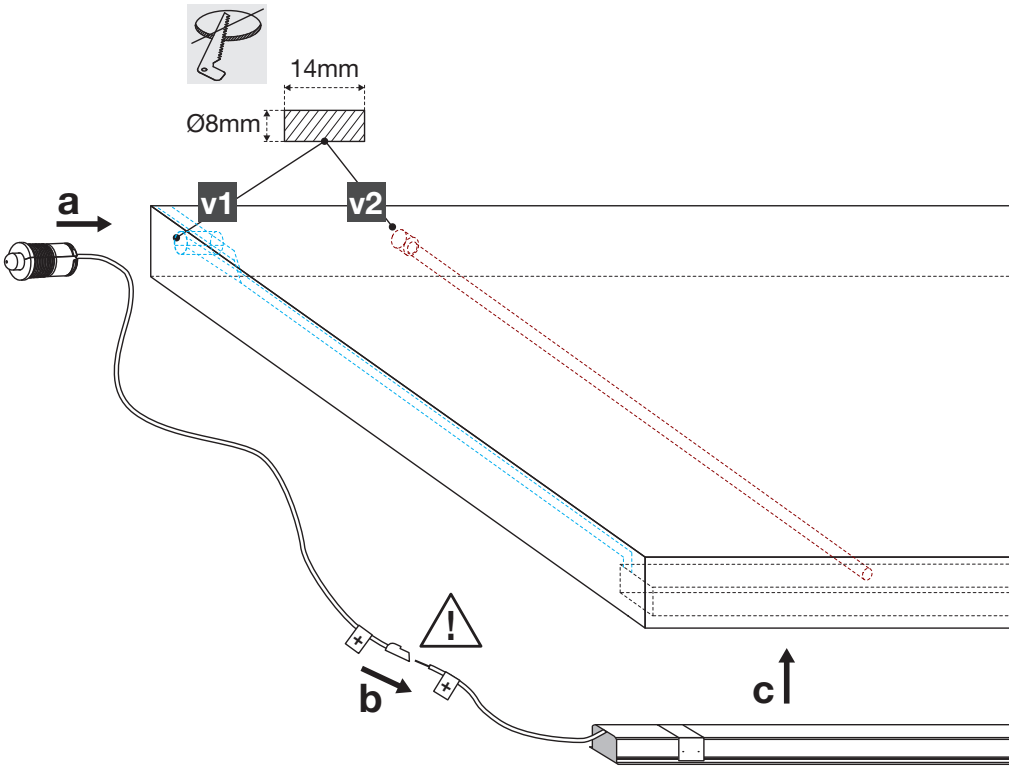

2 RAIL SCHEME

RAIL CONNECTION FOR MECCANO SLIDING

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

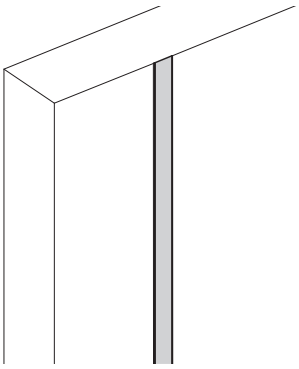

A1 Surface-Mounted ("pin" version)



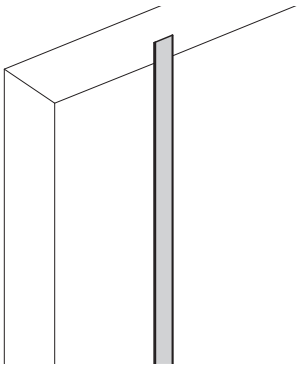

A2 Surface-Mounted ("faston" version)



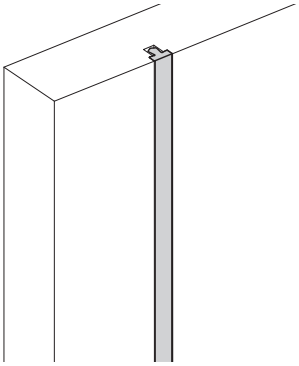

B Recessed ("pin" version only)



	CODE	VERS.	L mm
A	19800400000	Surface Mounted	3m
B	19800410000	Recessed	3m

Max load of the rail: **5A**

A B INSTALLAZIONE BINARIO

SURFACE-MOUNTED*

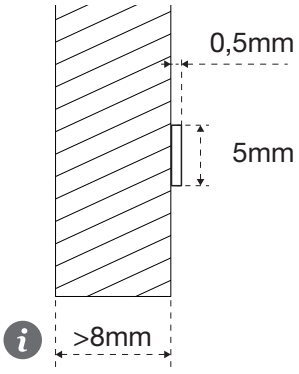

RECESSED

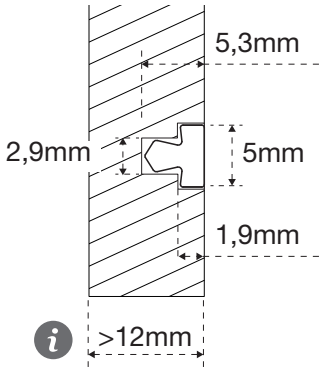

"PIN" VERSION



"FASTON" VERSION



"PIN" VERSION ONLY



*** PROVIDED WITH ADHESIVE FOR FIXING**

3 SUPPLY SCHEME

POWER SUPPLIES + RAIL CONNECTOR (SLIDING)

MEC-1 MEC-2 MEC-3 MEC-4 MEC-5

A POWER SUPPLY

12Vdc 24Vdc

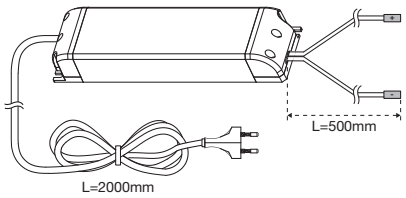

CODE	a mm	b mm	c mm		VDC	P(W)	I(A)
12506880100	180	52	30	30K/hours	12	max. 45	3,75
12506890100	180	52	30	30K/hours	12	max. 75	6,25
12509420100	180	52	30	30K/hours	24	max. 45	1,875
12509430100	180	52	30	30K/hours	24	max. 75	3,125

B RAIL CONNECTION (PIN VERSION)



CODE	VERS.	
12417111000		Track connector with “PIN” connection (for surface-mounted and recessed rail)

C RAIL CONNECTION (FASTON VERSION)



CODE	VERS.	
12421130000		Track connector with “FASTON” connection (only for surface-mounted rail)

A B RAIL CONNECTOR INSTALLATION (“PIN” VERSION)

C RAIL CONNECTOR INSTALLATION (“FASTON” VERSION)

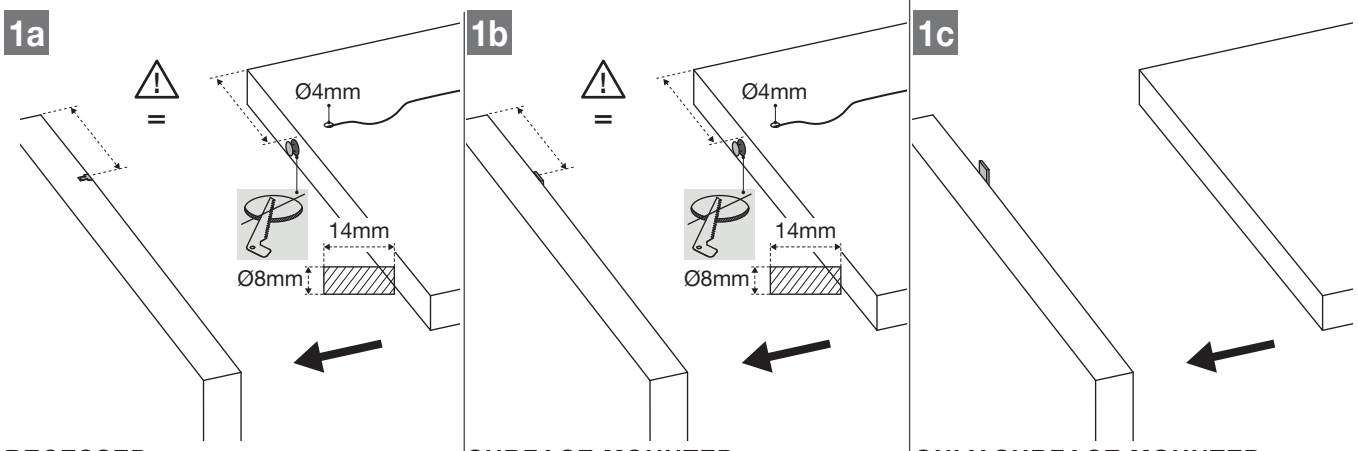

RECESSED SURFACE-MOUNTED ONLY SURFACE-MOUNTED

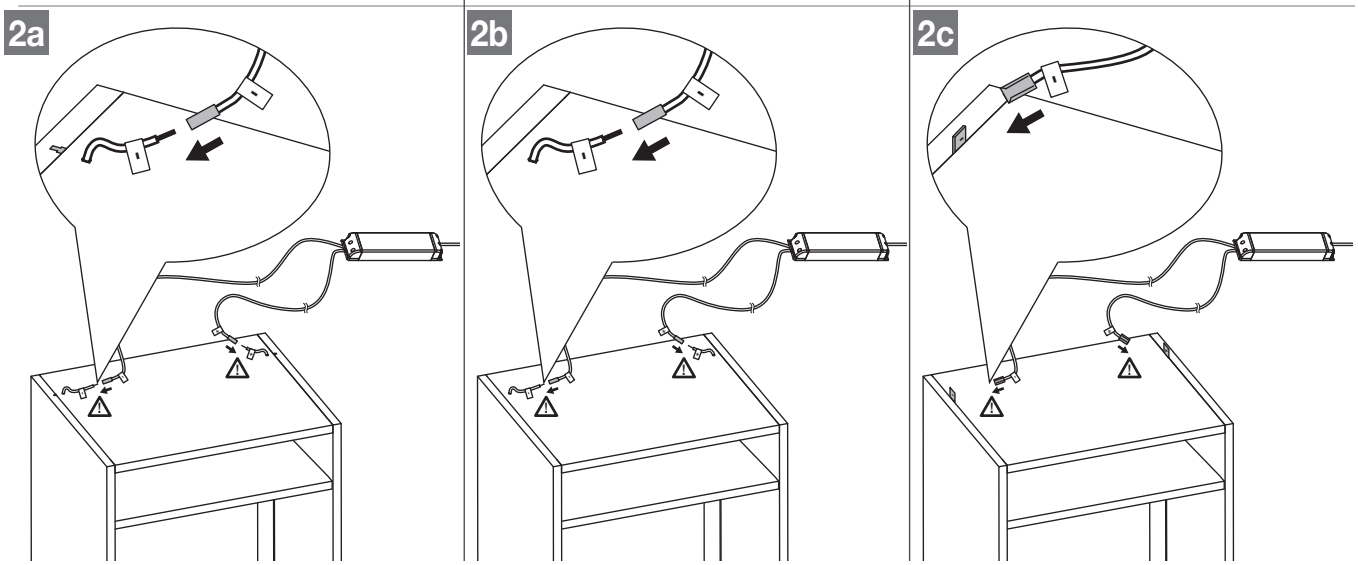

SOLARIS

The most complete and flexible range to backlight and enhance the appearance of your displays.

La gamma più completa e flessibile di pannelli per retroilluminazione.

Solaris provides an even more natural perception of light

Solaris per una percezione delle luce ancora più naturale

Thanks to the construction of the panel, the diffusion of light is uniform even on large panels and to the high efficiency led's. Special light effects on the surface can also be achieved if desired.

Grazie al metodo di costruzione del pannello, la diffusione della luce risulta omogenea anche su pannelli molto grandi sfruttando l'effecienza della luce LED. Effetti di luce personalizzati su richiesta.

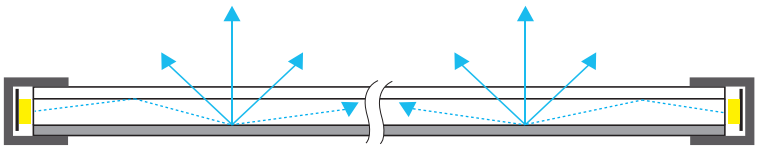

Emotion Technology

for striking color combinations, to evoke natural shades

Emotion Dual Color (EDC) is the innovative system developed by L&S for the easy management of color temperature from warm white (3000K) to natural white (4000K) or vice versa in a single lighting device, in one simple move.
Thanks to the new EDC system, it is now possible to meet a range of market demands, from the correct illumination of a kitchen worktop to lighting that accentuates a product in a retail space, effectively providing two products in a single fixture.

Solaris panels can also display a wider range of color temperatures (from 2700K to 6500K) thanks to the combination of the Emotion technology and the L&S SMART controls.

Why choose SOLARIS

Perché scegliere SOLARIS

Solaris has infinite possibilities for personalization, both in terms of size and of final application. It can be used in conjunction with graphics, can be retro-fitted in existing retail spaces, can be shaped as a waving shelf and can be adapted to light large spaces.

L&S, thanks to its internal know-how and the use of the latest technology, can further personalize the production of Solaris in terms of dimensions, shape and lighting diffusion.

Dimensions:
a reduced thickness for a very flexible installation
spessore ridotto

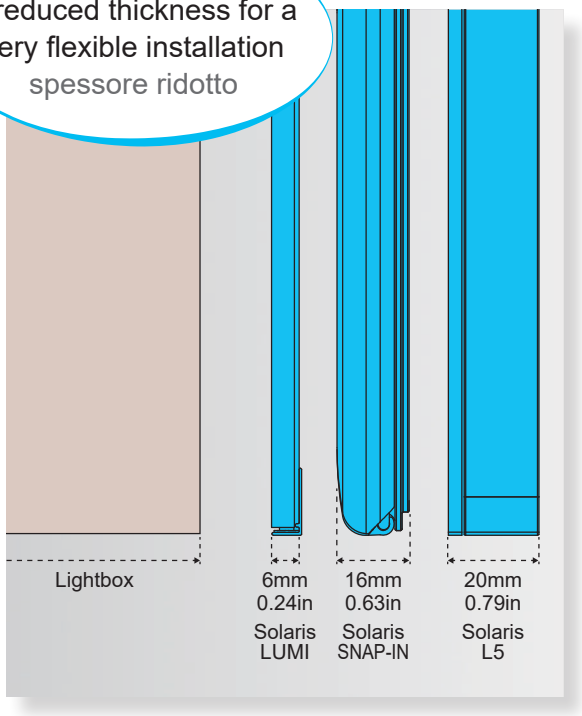

Advanced features:
customized shapes, not limited to 90° corners
forma personalizzabile

Diffusion:
homogeneous look.
Light is everywhere!
Diffusione omogenea della luce

Advanced features:
specific light distribution on customer request
diffusione luce personalizzabile

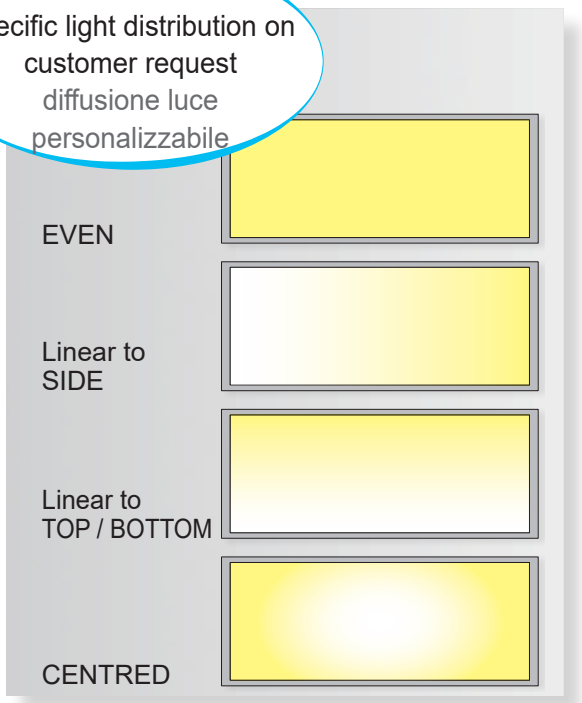

Applications Applicazioni

5 CEILING

1 5 FRAMELESS



1 2 5 BACKLIGHTING



6 SHELF

2 SUSPENDED

3 5 GRAPHIC FRAME



4 5 EDGELIT



1 + 1 DOUBLE FACE

Models Modelli

1 L5

a light source perfectly fitting the display casing



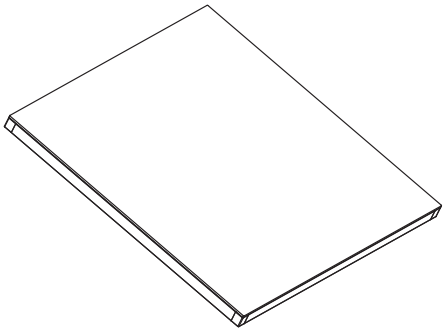

2 L10

a fixed aluminium frame to embrace the lighting effect



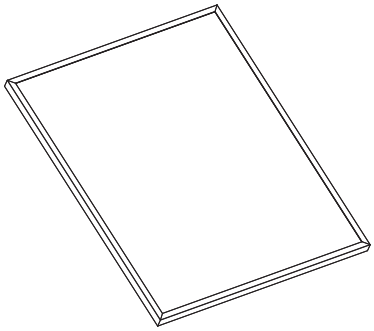

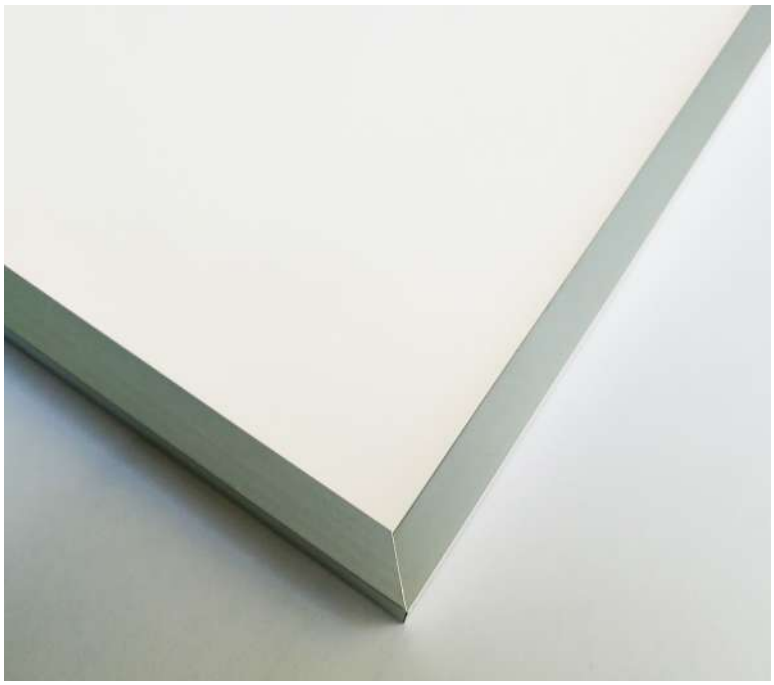

Models Modelli

3 SNAP-IN

the most practical way to add your graphic message and to change it whenever you need

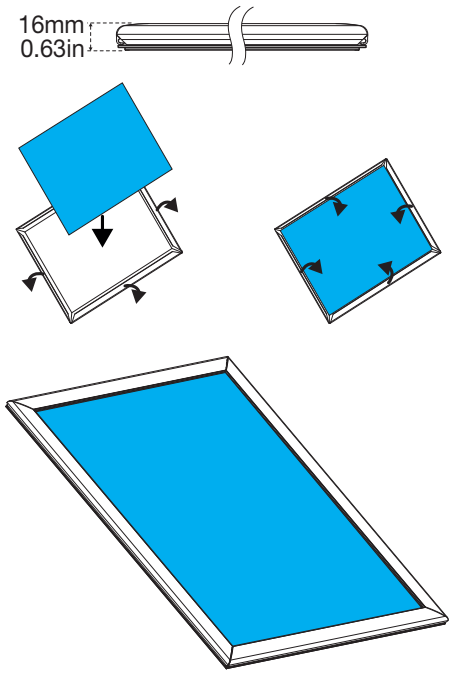

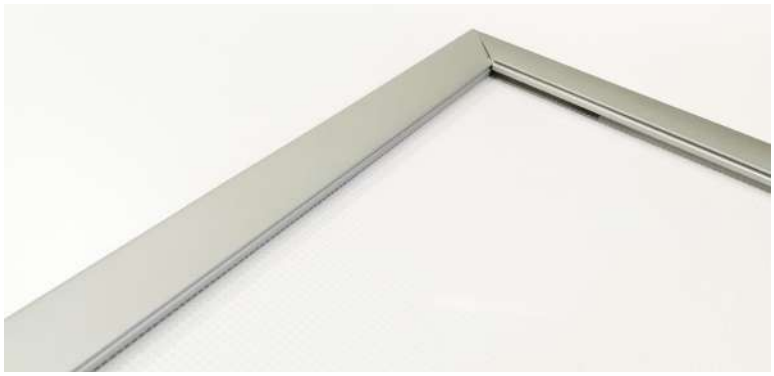

4 FRAMELESS

for all applications where space is limited

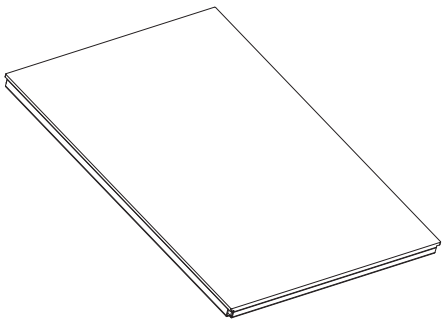

Models Modelli

5 LUMI

The ultra-thin edgelit LED Panel of only 6mm thickness. The ideal choice for backlighting



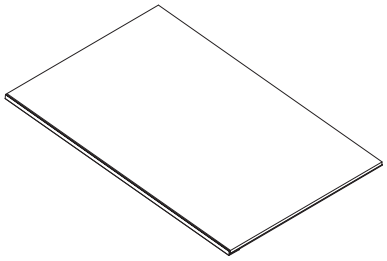

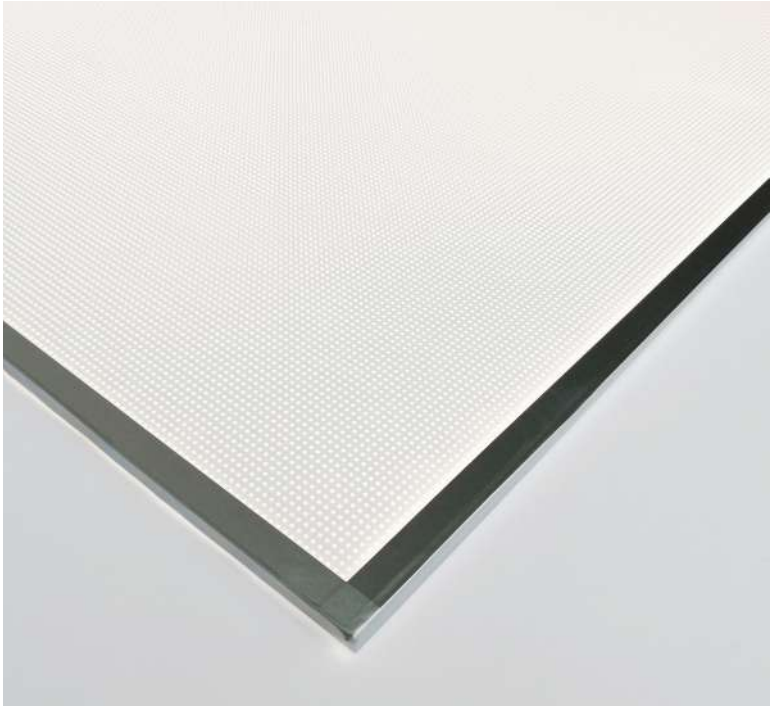

6 LUX

A practical lighted shelf, enhancing the appearance of glasses, watches and other small objects

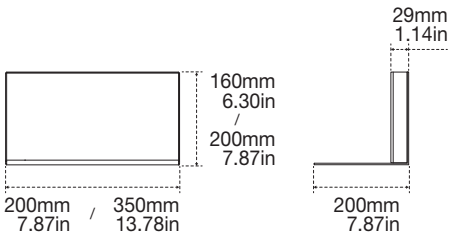



Highlights I plus di prodotto

Customizable light diffusion
Diffusione della luce personalizzabile

Customizable light intensity
Intensità luminosa personalizzabile

Homogeneous light diffusion
Diffusione omogenea della luce

Choice of the light color temperature
Scelta della temperatura luce

A complete range for all applications
Una gamma completa per tutti gli usi

Customizable color and finishing
Finiture e colori personalizzabili

Dedicated wall fixing kit
Kit per fissaggio a muro

Customizable shape
Forma personalizzabile

Customizable sizes
Dimensioni personalizzabili

Reduced thickness
Spessore ridotto

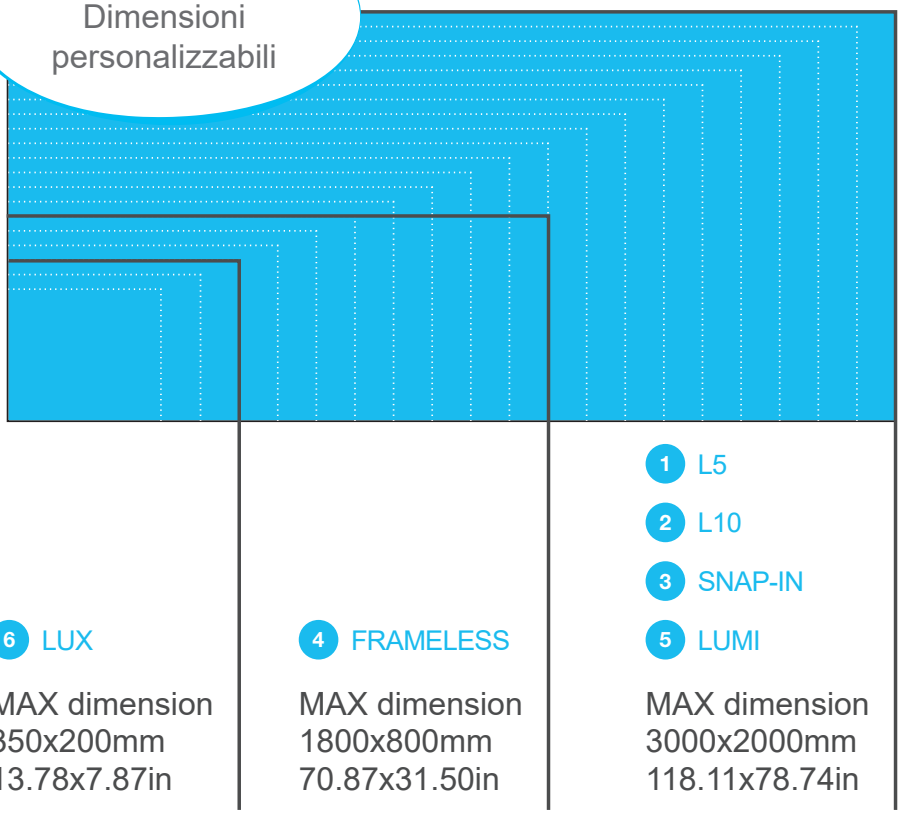

Product Features Caratteristiche di prodotto

	L5	L10	SNAP-IN (SI)	FRAMELESS (FL)	LUMI	LUX
Electrical data						
Input voltage	12VDC / 24VDC					
Electrical connection	24AWG wire with Twin Connector (standard length, max. 3m/118.11in)					
Wiring	One wire per lit side. Single wire cabling available (1)			One wire per lit side	One wire per lit side	Single wire cabling
Light data						
3000K (Warm White)	•	•	•	•	•	•
4000K (Natural White)	•	•	•	•	•	•
6500K (Cold White)	•	•	•	•	•	•
2700-6500K (3) (Emotion)	•	•	•	•	•	•
3000-4000K (Emotion Dual Color)	•	•	•	•	•	•
RGB (3)	•	•	•			•
Color finishing (2)						
Anodized aluminium	Standard finishing Anodized aluminium	•	•	n.a.	n.a.	Standard finishing Anodized aluminium for frame. Finishing of metal shelf: White, Anodized aluminium and Bronze
RAL 9003 (White)		•	•			
RAL 9005 (Black)		•	•			
Dimension data						
Maximum size	3000x2000mm / 118.11x78.74in			1800x800mm 70.87x31.50in	3000x800mm / 118.11x31.50in	n.a.
Thickness	20mm / 0.79in	18mm / 0.71in	16mm / 0.63in	8mm / 0.31in	6mm / 0.24in	n.a.

(1) Single wiring available up to 36W (12VDC) or 72W (24VDC)

(2) Custom finishing only for L10 and Snap-IN version

(3) Remote control required

NOTE:

Optional wall fixing kit for Solaris L5, L10 and Snap-In, allowing a quick and safe mounting and a precise position adjustment. Important: the panel must be configured in production to ensure the compatibility with the mounting kit. Please request the wall mounting kit together with the order of the Solaris.

LED specifications	
Life-time	35,000 hours (L70 - lumen maintenance)* in free air circulation condition (lifetime estimated on the basis of the led manufacturer technical information) * L70 means that after the mentioned hours the leds maintain an intensity of light emitted equal to 70% of the initial intensity of light emitted

Mechanical specifications	
Degree of protection	IP20
Accessories	The product must be used with a compatible L&S driver of adequate maximum power. Optional wall mounting kit available for types SNAP-IN, L5 and L10
Type of cable	AWM 2468 VW-1 80°C 300V AWG24 - Transp.
Note	All materials are RoHS compliant

Terms and conditions of sale

Condizioni generali di vendita

1. General terms and conditions of sale - The sale of the products described in the purchase orders (the “Products”) is regulated by these general terms and conditions of sales (“General Conditions”) that supersede any previous general terms and conditions of sale and, however, any prior agreement, whether written or oral.
The Client (“Client”) accepts all the General Conditions contained herein, waiving, as the case may be, to its general conditions of purchase, considered in its entirety or individually.
These General Conditions, as known and approved by the Client, shall apply even in case of following agreements with the same Client, either oral or made by letter, or by e-mail, or by other printed forms or otherwise. Therefore, all submitted orders, even verbally, to L&S Italia S.r.l. (“L&S”), either directly or indirectly through its representative or agents, shall be deemed always subject to the provisions of these General Conditions.
Any exceptions to these General Conditions can be agreed only by virtue of different agreements accepted in writing by L&S.
2. Order - The purchase order (“Order”) constitutes an irrevocable proposal for a period of 3 days from the date of its receipt by L&S.
3. Acceptance of the Order - Agreement - Transfer of ownership - The sale and purchase agreement of the Products (the “Agreement”) is governed by the Order and by these General Conditions.
The Agreement is executed when the Client receives a formal confirmation of the Order by L&S, or, failing that, when L&S performs the Order by delivering the Products to the carrier or to the forwarding agent.
Should any conflict between the General Conditions and the provisions of the Order arise, the General Conditions shall prevail.
Pursuant to article 1378 of the Italian Civil Code the ownership is transferred at the time of delivery of the Products to the carrier or to the forwarding agent.
4. Price - The price of the Products is shown on the price list in force at the time of the submission of the Order by the Client. Unless otherwise stated, all prices indicated in any document and correspondence issued by L&S are deemed in Euro and with exclusion of VAT.
L&S reserves the right to modify - at any time and without notice - the price list due to increase in raw materials and/or labour costs.
If, as a result of changes in mass production occurred before the Order, the ordered Products are no longer included in mass production, the Parties shall agree each time the price to apply to such Products. It is under Client’s responsibility to ask information as to which elements are included or not in a mass production at the time of the Order.
L&S does not accept returns of elements which are no longer included in mass production.
5. Products’ Features - All the features shown in the catalogue and on the L&S web site (such as, for example, drawings and technical data) are approximate only and may be modified by L&S at any time and without notice. Any inaccuracies shall not entitle the Client to request the total or partial termination of the Agreement nor any compensation for damages or indemnities.
6. Risks of transport - Delivery - Delivery terms are not peremptory; L&S, in case of objective needs, shall have the right to reasonably anticipate or postpone the delivery of all or part of the goods, without any right of the Client to request the total or partial termination of the Agreement, or to seek compensation for damages or indemnities.
All deliveries are made FCA Incoterms 2010 - Viale Lino Zanussi n. 8, Maron Brugnera (PN) – Italy. Being understood that the term “delivery” means the moment of the loading to the carrier/forwarding agent’s vehicle, which entail the transfer of ownership of the Products from L&S to the Client. Products are carried at Client’s risk. Any change of the place of destination notified by the Client after submission of the Order is not binding for L&S, if not accepted in writing. The request for direct collection by the Client shall be clearly specified in the Order.
The documents certifying the delivery or other documentation, in any case arising out of or related to the Order is duly signed on behalf of Client by any person appearing employed on its business or selling point, even if not expressly provided with representation powers.
7. Refusal to accept delivery - If the Client refuses to accept delivery of all or part of the Products at the place of destination, L&S may, at its sole option, request the performance of the Agreement, or declare the total or partial termination of it. In both cases, L&S retains the right to seek compensation for damages. It is expressly excluded any liability of L&S for risks arising out of, or related to, the stored Products (Products in stock).
8. Suspension. Termination - Should the Client be in default or in delay with payments, also for previous supplies or sums of money due at any title, regardless of the reason of such default/delay, L&S shall have the right to suspend at any time and without notice the performance of the Order (although expressly accepted), as well as to subordinate the delivery of the Products to a full advance payment of the price and of any other amounts due, or to the immediate delivery of adequate guarantees.
L&S shall have the same right in case of changes in the person of the Client, in its structure or company’s shareholdings, in the composition of its governing bodies or its management, in its financial position, financial consistency or commercial image, as well as in case of elevation of protests, pending of enforcement or precautionary procedures, suspensions, not minor difficulties or delays regarding the fulfillment of obligations undertaken, including those undertaken in favor of third parties. The above is without prejudice for L&S’ right to request termination of the Agreement and without prejudice, in any case, to L&S’ right to seek compensation for damages.
9. Installation and use - Products shall be installed and used in compliance with technical specifications and instructions drawn up by L&S. Furthermore, the Client shall comply with the provisions in force in the country of installation related to installation and use of electrical equipment/device.
L&S shall not assume any liability in the event of wrong or incorrect assembly/installation of the Product, whether it has been manufactured by L&S itself or by third parties.
10. Warranty - Limits - L&S ensures that Products are free from manufacturing defects. This warranty is granted for one year after delivery of the Products, unless otherwise agreed in writing. This warranty does not cover light sources supplied with the light fitting (incandescent lamps, halogen lamps, fluorescent lamps and gas discharge lamps). This warranty does not include shortages, differences related to colors, materials and sizes, as well as irregularities of packaging, which are normally tolerated in the business practice (so called: tolleranze d’uso) at the time and at the place of delivery to the carrier or to the forwarding agent.
The L&S warranty obligation is expressly limited to the following remedies: delivery of Products which have been ascertained as missing, replacement of returned Products which have been ascertained as defective or, in both cases, at the sole choice of L&S, a corresponding price reduction.
Any other different warranties and remedies, express or implied, including – by way of example - any warranties of merchantability or fitness for a particular purpose of Products are expressly excluded. Likewise, any compensation for damages or indemnities, regardless the beneficiary and the claimant, are expressly excluded.
11. Returns - L&S shall not accept returned goods unless authorized in writing by L&S itself. The shipment shall be at Client’s charge, who shall attach the duly completed authorization form. The returned goods accepted by L&S shall be credited at the invoice price paid at the purchase, minus depreciation for age, wear and tear or damages attributable to the Client.
In case of Products returned and ascertained to be defective, the provisions of article 10 above (warranty) shall apply, if and to the extent the conditions therein set forth exist.
12. Complaints - Any claims for shortages, breakdown, pilferages or damages due to transportation, which appear from an external examination of packages containing the Products, shall be raised, under penalty of loss of the right, at the time of delivery by the Client, with a detailed annotation signed by the Client itself an d attached to the transport and delivery documentation. Any complaints or defects, breakdowns, shortages and damages which do not appear from an external inspection of packages, shall be raised, under penalty of loss of the right, by registered mail with acknowledgment of receipt or sent by certified mail (PEC) to L&S within 8 (eight) days from receipt of Products in case of apparent defects, breakdowns and shortages, and within eight (8) days from discovery for hidden defects. The right of the Client to raise any claim shall expire, in any case, after one year from delivery of Products. A pending of a complaint or allegation of warranty claim shall not constitute a reason, for Client, to delay or suspend the payment of the price, even in part. It is expressly excluded the Client’s right to set-off any credit arising out of the warranty under Article 10 above.
13. Payments - The place of performance of any payment obligation of the price shall always be L&S registered office. Such place shall not be changed in case of issue of a promissory notes or a bills of exchange/draft, or bank receipts. Only payments made directly to L&S or to its representative in possession of regular authorization shall be deemed valid.
Payments shall be made according to the terms and conditions specified in the order confirmation.
Without prejudice to the provisions of Article 8 (suspension) above, default of payment and/or failure to meet the agreed deadlines shall entitle L&S to request interests to the extent set forth under art. 5 of the Legislative Decree no. 231 of 2002, without prejudice also of L&S’s right to claim additional (greater) damages. In such event, the whole outstanding balance becomes due (i.e. expiry of time limit) and L&S shall be entitled to request the immediate payment of any amount due at any title.
14. Trademarks - The Client is expressly forbidden to remove, suppress or alter in anyway, trademarks or distinctive signs affixed to the Products, as well as to affix new trademarks or distinctive signs of any kind. Unless otherwise expressly authorized by L&S in writing, it is prohibited any form of reproduction or use by the Client of the trademarks and other distinctive signs affixed to the Products.
15. Written Form - The provisions of these General Conditions shall not be amended or terminated verbally, nor assumption of obligations or waive of rights can validly be made orally, but exclusively by a document signed by the party against whom the modification, termination, assumption or waive shall have effect.
16. Applicable Law and Jurisdiction – Competent Court - All sale and purchase agreements with L&S are regulated by the Italian law. The application of the United Nations Convention on Contracts for the International Sale of Goods (1980) is expressly excluded. Any disputes that may arise out of (or in connection with) sale and purchase agreements shall be submitted to the exclusive jurisdiction of the Court of Pordenone (Italy).